

JVC AV-32F475/Y SERVICE MANUAL



Table of Contents

[Table of Contents](#)

[PRECAUTION](#)

[SPECIFIC SERVICE INSTRUCTIONS](#)

[DISASSEMBLY](#)

[ADJUSTMENT](#)

[TROUBLE SHOOTING](#)

[EXPLODED VIEW -1](#)

[EXPLODED VIEW PARTS LIST -1](#)

[USING P.W. BOARD & REMOTE CONTROL UNIT](#)

EXPLODED VIEW PARTS LIST -2

EXPLODED VIEW -2

PRINTED WIRING BOARD PARTS LIST [AV-32F475/Y]

MAIN P.W. BOARD ASS'Y (SGJ-1553A-M2)

CRT SOCKET P.W. BOARD ASS'Y (SGJ-3515A-M2)

AV SELECTOR P.W. BOARD ASS'Y (SGJ-5506A-M2)

FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6506A-M2)

LED & POWER SW P.W. BOARD ASS'Y (SGJ-7506A-M2)

PRINTED WIRING BOARD PARTS LIST [AV-32F475/Z]

MAIN P.W. BOARD ASS'Y (SGJ-1554A-M2)

CRT SOCKET P.W. BOARD ASS'Y (SGJ-3514A-M2)

AV SELECTOR P.W. BOARD ASS'Y (SGJ-5506A-M2)

FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6506A-M2)

LED & POWER SW P.W. BOARD ASS'Y (SGJ-7506A-M2)

MAIN P.W. BOARD ASS'Y (SGJ-1558A-M2)

CRT SOCKET P.W. BOARD ASS'Y (SGJ-3515A-M2)

AV SELECTOR P.W. BOARD ASS'Y (SGJ-5506A-M2)

FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6506A-M2)

LED & POWER SW P.W. BOARD ASS'Y (SGJ-7506A-M2)

MAIN P.W. BOARD ASS'Y (SGJ-1559A-M2)

CRT SOCKET P.W. BOARD ASS'Y (SGJ-3514A-M2)

AV SELECTOR P.W. BOARD ASS'Y (SGJ-5506A-M2)

FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6506A-M2)

LED & POWER SW P.W. BOARD ASS'Y (SGJ-7506A-M2)

REMOTE CONTROL UNIT PARTS LIST (RM-C1258G-1H)

PACKING

PACKING PARTS LIST

MAIN PWB CIRCUIT DIAGRAM

AV SELECTOR PWB CIRCUIT DIAGRAM

CRT SOCKET PWB CIRCUIT DIAGRAM

FRONT CONTROL PWB CIRCUIT DIAGRAM

LED & POWER SW PWB CIRCUIT DIAGRAM

MAIN PWB PATTERN

AV SELECTOR PWB PATTERN

CRT SOCKET PWB PATTERN

FRONT CONTROL PWB PATTERN

LED & POWER SW PWB PATTERN

Other ManualsLib Projects

JVC

SERVICE MANUAL

COLOR TELEVISION

**AV-32F475_{1Y}, AV-32F475_{1Z},
AV-32F485_{1Y}, AV-32F485_{1Z}**

BASIC CHASSIS

GJ4



I'Art[™]
BBE

TABLE OF CONTENTS

1	PRECAUTION.....	1-3
2	SPECIFIC SERVICE INSTRUCTIONS.....	1-4
3	DISASSEMBLY	1-6
4	ADJUSTMENT	1-12
5	TROUBLE SHOOTING.....	1-28

SPECIFICATION

Items		Contents	
		AV-32F475	AV-32F485
Dimensions (W × H × D)		93.9 cm × 68.5 cm × 57cm (37" × 27" × 22-1/2")	
Mass		64.0kg (140.8lbs)	
TV RF System		CCIR (M)	
Color System		NTSC	
Sound System		BTSC (Multi Channel Sound)	
TV Receiving Channels and Frequency	VHF low VHF high UHF CATV	02ch~06ch : 54MHz~88MHz 07ch~13ch : 174MHz~216MHz 14ch~69ch : 470MHz~806MHz 54MHz~804MHz Low Band : 02~06, A-8 by 02~06&01 High Band : 07~13 by 07~13 Mid Band : A~I by 14~22 Super Band : J~W by 23~36 Hyper Band : W+1~W+28 by 37~64 Ultra Band : W+29~W+84 by 65~125 Sub Mid Band : A8, A4~A1 by 01, 96~99	
TV / CATV Total Channel		180 Channels	
Intermediate Frequency	Video IF Sound IF	45.75 MHz 41.25 MHz (4.5MHz)	
Color Sub Carrier		3.58 MHz	
Power Input		AC120V, 60Hz	
Power Consumption		160W	
Picture Tube (Visible size)		80cm (32") Measured diagonally (H : 65.6cm × W : 49.6cm)	
High Voltage		31.4kV ±1.3kV [at Zero beam current]	
Speaker		6.5cm × 13cm (2-1/2" × 5"), Oval type × 2	
Audio Power Output		7.5W + 7.5W	9W + 9W
Antenna Terminal (VHF / UHF)		F-type connector, 75 Ω unbalanced	
Video / Audio input Input-1/2/3	Component Video [Input-2] S-video [Input-1] Video Audio	RCA pin jack × 3 Y : 1V(p-p), negative sync, 75 Ω Pb/Pr : 0.7V(p-p), 75 Ω Mini DIN 4-pin × 1 Y : 1V(p-p), negative sync, 75 Ω C : 0.286V(p-p)(burst signal), 75 Ω 1V(p-p), negative sync, 75 Ω, RCA pin jack × 3 500mV(rms)(-4dBs), high impedance, RCA pin jack × 6	
Audio Output (Fix)		500mV(rms)(-4dBs), low Impedance, (400kHz when modulated 100%), RCA pin jack × 2	
Remote Control Unit		RM-C1258G (AA/R6/UM-3 battery × 2)	

Design & specifications are subject to change without notice.

SECTION 1 PRECAUTION

1.1 SAFETY PRECAUTIONS

- (1) The design of this product contains special hardware, many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.
- (2) Alterations of the design or circuitry of the products should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.
- (3) Many electrical and mechanical parts in the products have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the parts list of Service manual. **Electrical components having such features are identified by shading on the schematics and by (Δ) on the parts list in Service manual.** The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the parts list of Service manual may cause shock, fire, or other hazards.
- (4) **Use isolation transformer when hot chassis.**
The chassis and any sub-chassis contained in some products are connected to one side of the AC power line. An isolation transformer of adequate capacity should be inserted between the product and the AC power supply point while performing any service on some products when the HOT chassis is exposed.
- (5) **Don't short between the LIVE side ground and ISOLATED (NEUTRAL) side ground or EARTH side ground when repairing.**
Some model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : ($\perp$) side GND, the ISOLATED (NEUTRAL) : ($\equiv$) side GND and EARTH : ($\oplus$) side GND. Don't short between the LIVE side GND and ISOLATED (NEUTRAL) side GND or EARTH side GND and never measure the LIVE side GND and ISOLATED (NEUTRAL) side GND or EARTH side GND at the same time with a measuring apparatus (oscilloscope etc.). If above note will not be kept, a fuse or any parts will be broken.
- (6) If any repair has been made to the chassis, it is recommended that the B1 setting should be checked or adjusted (See B1 POWER SUPPLY check).
- (7) The high voltage applied to the picture tube must conform with that specified in Service manual. Excessive high voltage can cause an increase in X-Ray emission, arcing and possible component damage, therefore operation under excessive high voltage conditions should be kept to a minimum, or should be prevented. If severe arcing occurs, remove the AC power immediately and determine the cause by visual inspection (incorrect installation, cracked or melted high voltage harness, poor soldering, etc.). To maintain the proper minimum level of soft X-Ray emission, components in the high voltage circuitry including the picture tube must be the exact replacements or alternatives approved by the manufacturer of the complete product.
- (8) Do not check high voltage by drawing an arc. Use a high voltage meter or a high voltage probe with a VTVM. Discharge the picture tube before attempting meter connection, by connecting a clip lead to the ground frame and connecting the other end of the lead through a 10k Ω 2W resistor to the anode button.
- (9) When service is required, observe the original lead dress. Extra precaution should be given to assure correct lead dress in the high voltage circuit area. Where a short circuit has occurred, those components that indicate evidence of overheating should be replaced. Always use the manufacturer's replacement components.

(10) Isolation Check (Safety for Electrical Shock Hazard)

After re-assembling the product, always perform an isolation check on the exposed metal parts of the cabinet (antenna terminals, video/audio input and output terminals, Control knobs, metal cabinet, screw heads, earphone jack, control shafts, etc.) to be sure the product is safe to operate without danger of electrical shock.

a) Dielectric Strength Test

The isolation between the AC primary circuit and all metal parts exposed to the user, particularly any exposed metal part having a return path to the chassis should withstand a voltage of 1100V AC (r.m.s.) for a period of one second.

(... Withstand a voltage of 1100V AC (r.m.s.) to an appliance rated up to 120V, and 3000V AC (r.m.s.) to an appliance rated 200V or more, for a period of one second.) This method of test requires a test equipment not generally found in the service trade.

b) Leakage Current Check


Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Using a "Leakage Current Tester", measure the leakage current from each exposed metal part of the cabinet, particularly any exposed metal part having a return path to the chassis, to a known good earth ground (water pipe, etc.). Any leakage current must not exceed 0.5mA AC (r.m.s.).

However, in tropical area, this must not exceed 0.2mA AC (r.m.s.).

Alternate Check Method



Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Use an AC voltmeter having 1000 Ω per volt or more sensitivity in the following manner. Connect a 1500 Ω 10W resistor paralleled by a 0.15 μ F AC-type capacitor between an exposed metal part and a known good earth ground (water pipe, etc.). Measure the AC voltage across the resistor with the AC voltmeter. Move the resistor connection to each exposed metal part, particularly any exposed metal part having a return path to the chassis, and measure the AC voltage across the resistor. Now, reverse the plug in the AC outlet and repeat each measurement. Any voltage measured must not exceed 0.75V AC (r.m.s.). This corresponds to 0.5mA AC (r.m.s.).

However, in tropical area, this must not exceed 0.3V AC (r.m.s.). This corresponds to 0.2mA AC (r.m.s.).

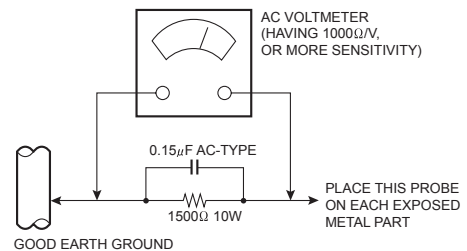

(11) High voltage hold down circuit check.

After repair of the high voltage hold down circuit, this circuit shall be checked to operate correctly. See item "How to check the high voltage hold down circuit".



SECTION 2

SPECIFIC SERVICE INSTRUCTIONS

2.1 FEATURES

SMART CAPTION [AV-32F485]

Smart caption will appear when you press the MUTING button, only on channels where the broadcast contains CLOSED CAPTION information.

SMART SOUND

Decreases high sound levels, giving a regulated sound level.

FLAT SQUARE CRT

It became legible from any position by CRT with few reflection and reflect lumps on the flat screen.

DIGITAL COMB FILTER

By the 3 line digital comb filter, the refreshed image can be seen.

VIDEO STATUS

Expression of a favorite screen can be chosen by the VIDEO STATUS function.

[STANDARD ↔ DYNAMIC ↔ THEATER ↔ GAME]

COMPONENT INPUT

Since the component signal input terminal is equipped, it reappears direct without deteriorating the signal from DVD.

V-CHIP

Since the V-CHIP is built in, it can choose, view and listen to a healthy program.

MTS STEREO

The voice multiplex function of the MTS system is built in. (MTS = Multi channel Television Sound system)

RETURN PLUS

You program a specific channel to return to while scanning through the channels using the CH+ and CH - keys.

VIDEO INPUT LABEL

This function is used to label video input connections for the onscreen displays.

WORLD CLOCK

The world clock feature provides time differences for some of the major cities around the world in real time.

BBE

High definition audio adds natural, clear and extraordinary sound quality to any program.

A.H.S. [AV-32F485]


Adds a more spacious surround sound. Music gives basic effect and Movie for more effect.

HYPER SURROUND [AV-32F475]

Creates a deep, three-dimensional sound effect by channeling the audio through the TV's front-firing speakers.

2.2 HOW TO IDENTIFY MODELS

How to recognize from the appearance of the model concerned is written below. Please distinguish from several contents currently printed on the rating label

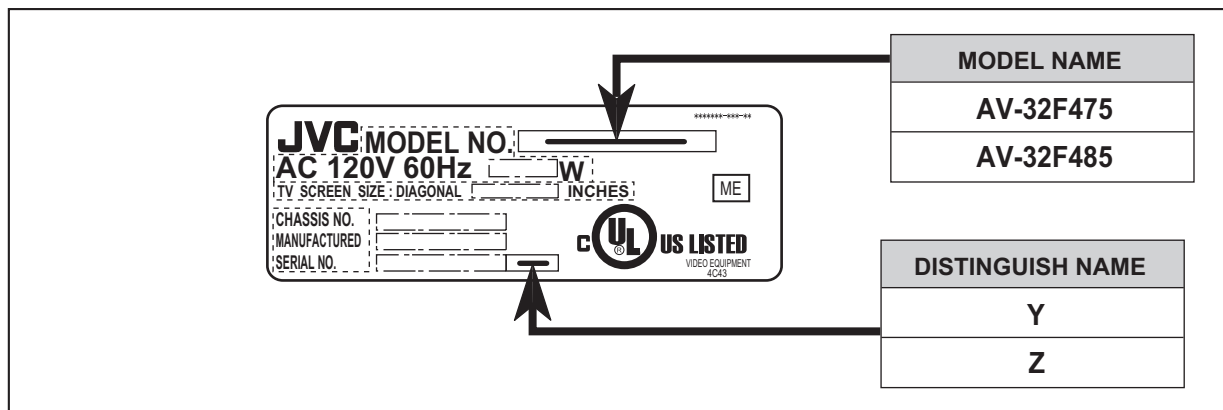


2.3 MAIN DIFFERENCE LIST

The difference between Y models and Z models are in the PICTURE TUBE.

Item	AV-32F475/Y	AV-32F475/Z	AV-32F485/Y	AV-32F485/Z
PICTURE TUBE (ITC)	A80AKS90X03	A80ERF082X17	A80AKS90X03	A80ERF082X17
SMART CAPTION	NO	←	YES	←
A.H.S.	NO	←	YES	←
HYPER SURROUND	YES	←	NO	←

2.4 TECHNICAL INFORMATION

2.4.1 SYSTEM BLOCK DIAGRAM

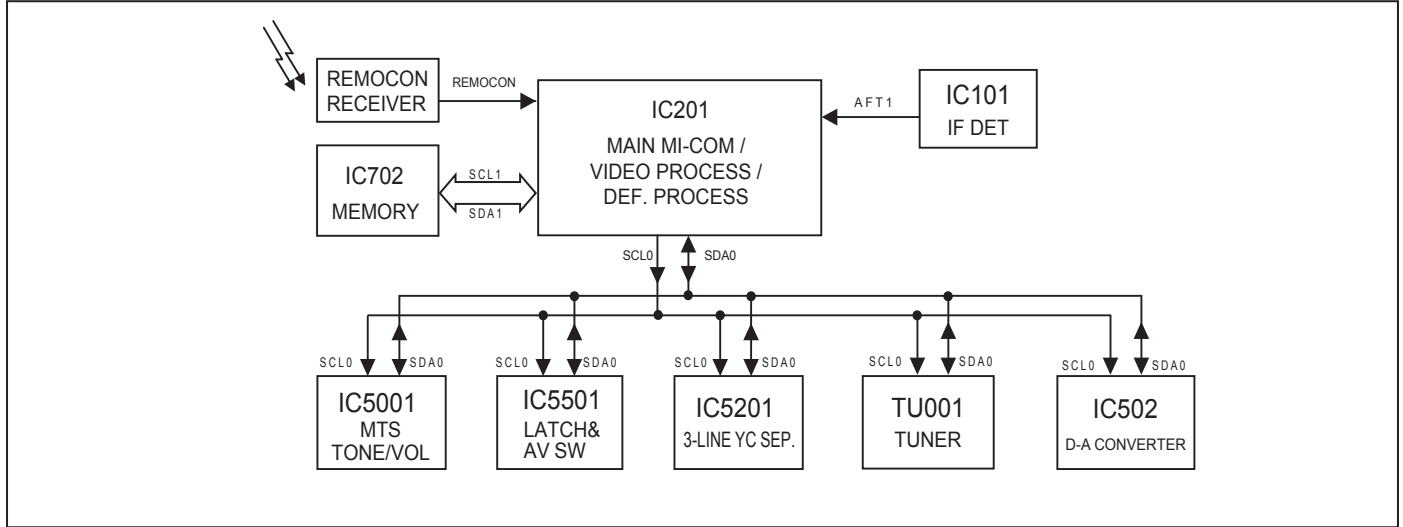

2.4.2 MAIN MI-COM (CPU) PIN FUNCTION

Pin No.	Pin name	I/O	Function	Pin No.	Pin name	I/O	Function
1	MTS_ADJ	I	Not used	29	YC_GND	-	GND
2	AFT1	I	AFT voltage for tuner (Tuning frequency control)	30	V1_IN	I	Not used
3	KEY	I	Key scan for front control [No signal : H]	31	ABCL	I	Current for automatic beam (brightness)/contrast limit
4	uP_DVss	-	GND	32	MONITOR_OUT	O	Not used
5	Reset	I	CPU reset	33	BLACK_DET	-	Black level detection filter
6	8MHz_OUT	O	CPU system clock : 8MHz oscillation	34	SVM_OUT	O	Y signal for velocity scan modulation
7	8MHz_IN	I	CPU system clock : 8MHz oscillation	35	APL_FIL	-	Average picture level filter
8	TEST	-	GND	36	APC_FIL	-	Automatic phase control filter
9	uP_DVDD	-	5V	37	fsc_OUT	O	Color sub carrier (3.58MHz) for 3-line digital comb filter [IC5201]
10	AGC_MUTE	O	AGC muting for tuner (when channel select) [Muting : H]	38	YC_Vcc	-	5V (for video process circuit)
11	uP_VVSS	-	GND	39	R_OUT	O	R signal
12	TV_HGND	-	GND	40	G_OUT	O	G signal
13	FBP_SCP	I	Flyback pulse (H. pulse)	41	B_OUT	O	B signal
14	HOUT	O	H. drive (oscillation)	42	RGB_Vcc	-	9V (for RGB process circuit)
15	H_Vcc	-	9V (for H. oscillation start)	43	IK_IN	I	Not used
16	HAFC_1	-	H. AFC filter	44	TV_DGND	-	GND
17	Vsaw	-	V. saw filter	45	uP_AGND	-	GND
18	VOUT	O	V. drive	46	uP_AVdd	-	5V
19	EW_OUT	O	Parabola waveform (for sidepin correction)	47	MAIN_POWER	O	Power on/off switching control [Power on : L]
20	X-RAY	I	X-ray detection (for protection) [Detection : H]	48	PANORAMA	I	Not used
21	Ys	I	Not used	49	SDAO	I/O	Data for Inter IC control bus (for various devices)
22	Cb_IN	I	Cb (external) signal	50	SCLO	O	Clock for Inter IC control bus (for various devices)
23	Y_IN	I	Y (external) signal	51	SDA1	I/O	Data for Inter IC control bus (for main memory)
24	Cr_IN	I	Cr (external) signal	52	A_MUTING	O	Audio muting [Muting : H]
25	TV_DVcc	-	3.3V	53	SCL1	O	Clock for Inter IC control bus (for main memory)
26	V3IN/CIN	I	Chroma signal (for YC separation output)	54	LED	O	POWER / ON TIMER LED Indication [lighting : L]
27	EHT_IN	I	Not used	55	REMOCON	I	Remote control sensor input [No input : H]
28	V2_IN/Y_IN	I	Y signal (for YC separation output)	56	ASP_ABL	I	Not used

SECTION 3

DISASSEMBLY

3.1 DISASSEMBLY PROCEDURE

3.1.1 REMOVING THE REAR COVER

- (1) Disconnect the power plug.
- (2) Remove the 11 screws [A].
- (3) Withdraw the REAR COVER backward.

3.1.2 REMOVING THE AV TERMINAL BOARD

- Remove the REAR COVER.
 - (1) Remove the 5 screws [B].
 - (2) Withdraw the AV TERMINAL BOARD toward you.

3.1.3 REMOVING THE CHASSIS

- Remove the REAR COVER.
- Remove the AV TERMINAL BOARD.
 - (1) Slightly raise the both sides of CHASSIS by hand.
 - (2) Remove the 2 claws under the both side of the CHASSIS from the front cabinet.
 - (3) Withdraw the CHASSIS backward.
(If necessary, remove the wire clamp, connectors etc.)

3.1.4 REMOVING THE SPEAKER

- Remove the REAR COVER.
 - (1) Remove the 2 screws [C].
 - (2) Remove the 2 screws [D] and remove the SPEAKER.
 - (3) Follow the same steps when removing the other hand SPEAKER.

NOTE :

When remove the 2 screws [C] of the SPEAKER, remove the lower side screw first, and then remove the upper one.

3.1.5 REMOVING THE LED & POWER SW PWB

- Remove the REAR COVER.
 - (1) Remove the 2 screws [E].
 - (2) Withdraw the LED & POWER SW PWB toward you.

*If necessary, remove the wire clamp, connector etc.

3.1.6 REMOVING THE FRONT CONTROL PWB

- Remove the REAR COVER.
 - (1) Remove the 2 screws [F].
 - (2) Withdraw the FRONT CONTROL PWB toward you.

*If necessary, remove the wire clamp, connector etc.

3.1.7 CHECKING THE CHASSIS

To check the PW Board from back side.

- (1) Pull out the CHASSIS (refer to REMOVING THE CHASSIS).
- (2) Erect the CHASSIS vertically with the HVT side facing up so that you can easily check the back side of the PW board.

CAUTION :

- When erecting the CHASSIS, be careful so that there will be no contacting with other PW Board.
- Before turning on power, make sure that the wire connector is properly connected.
- **When conducting a check with power supplied, be sure to confirm that the CRT EARTH WIRE (BRAIDED ASS'Y) is connected to the CRT SOCKET PWB.**

3.1.8 WIRE CLAMPING AND CABLE TYING

- (1) Be sure to clamp the wire.
- (2) Never remove the cable tie used for tying the wires together. Should it be inadvertently removed, be sure to tie the wires with a new cable tie.

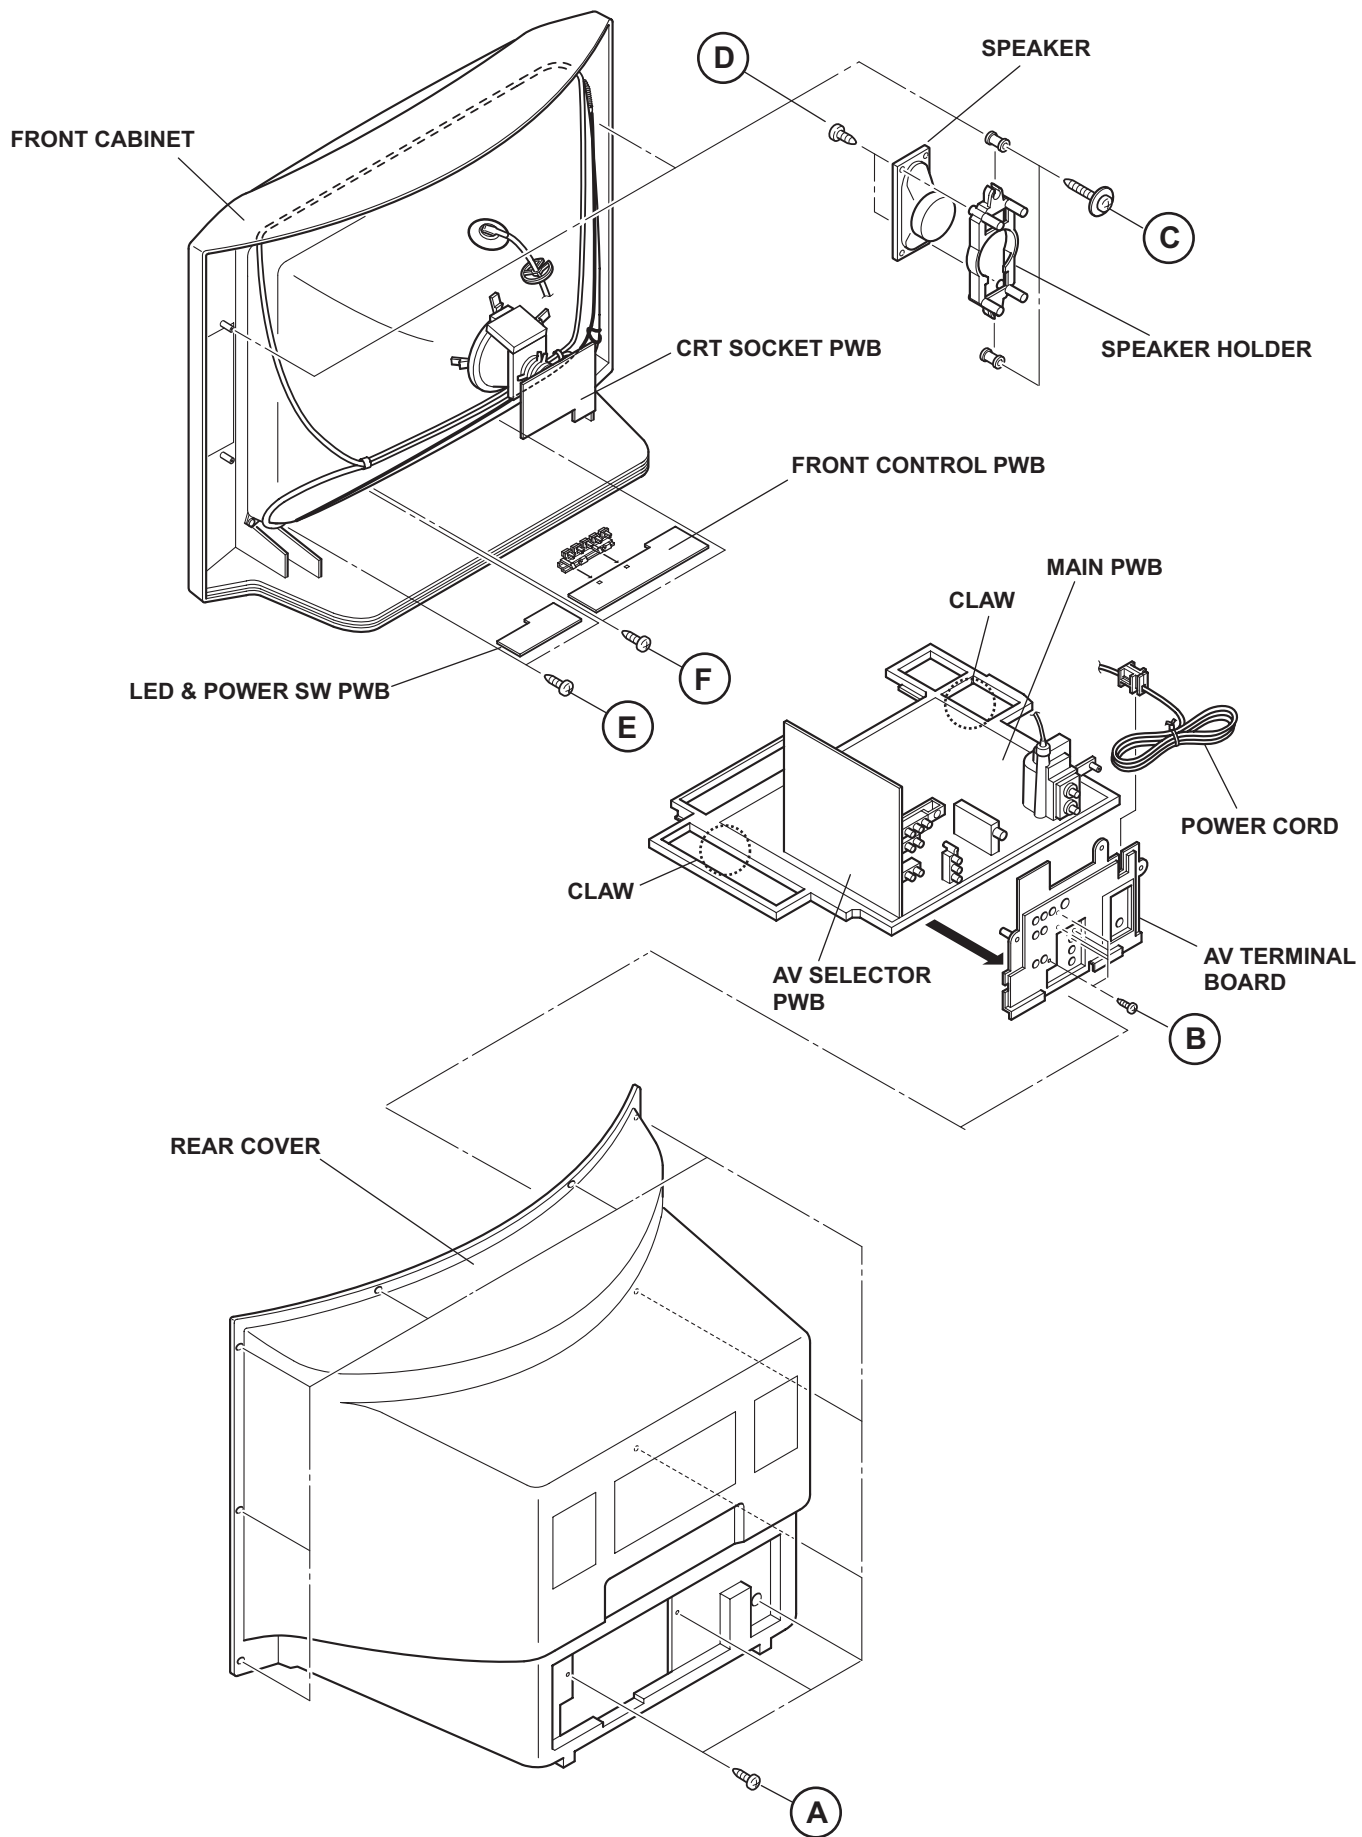


Fig.1

3.1.9 REMOVING THE CRT

NOTE:

- Replacement of the CRT should be performed by 2 or more persons.
 - After removing the REAR COVER, CHASSIS etc.,
- (1) Putting the CRT change table on soft cloth, the CRT change table should also be covered with such soft cloth (shown in Fig. 3).
 - (2) While keeping the surface of CRT down, mount the TV set on the CRT change table balanced will as shown in Fig. 3.
 - (3) Remove 4 screws marked by arrows with a box type screw-driver as shown in Fig. 4.

NOTE:

Since the cabinet will drop when screws have been removed, be sure to support the cabinet with hands.

- (4) After 4 screws have been removed, put the cabinet slowly on cloth (At this time, be carefully so as not to damage the front surface of the cabinet) shown in Fig. 5.

NOTE:

- The CRT should be assembled according to the opposite sequence of its dismantling steps.
- The CRT change table should preferably be smaller than the CRT surface, and its height be about 35cm.

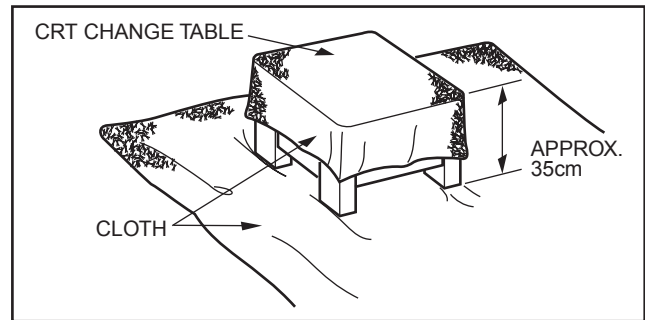


Fig.3

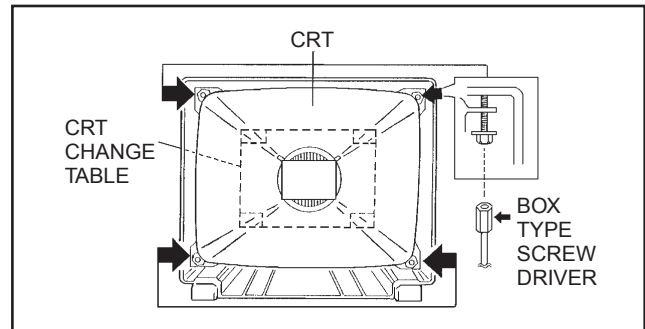


Fig.4

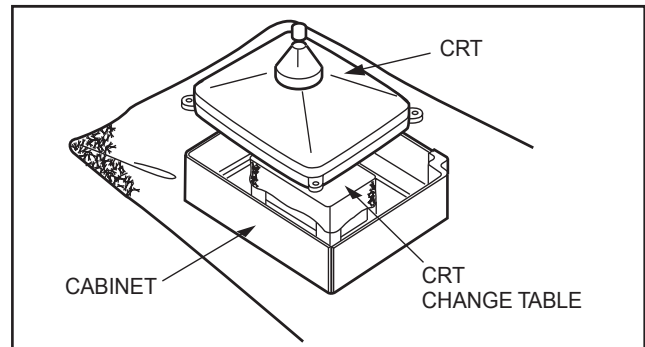


Fig.5

COATING OF SILICON GREASE FOR ELECTRICAL INSULATION ON THE CRT ANODE CAP SECTION.

Subsequent to replacement of the CRT and HV transformer or repair of the anode cap, etc. by dismantling them, be sure to coat silicon grease for electrical insulation as shown in Fig.6. Wipe around the anode button with clean and dry cloth. (Fig.6) Coat silicon grease on the section around the anode button. At this time, take care so that any silicon greases dose not sticks to the anode button. (Fig.7)

Silicon grease product No. KS - 650N

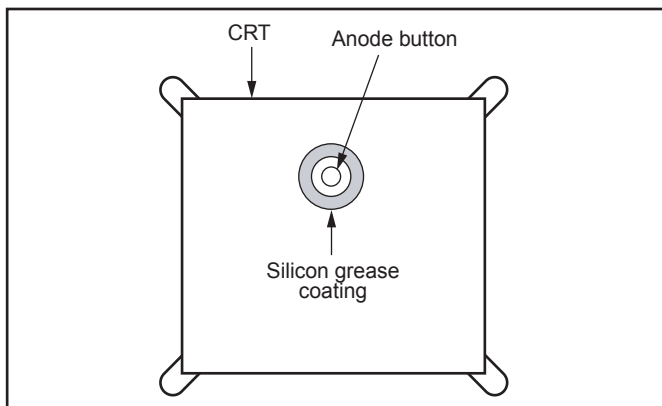


Fig.6

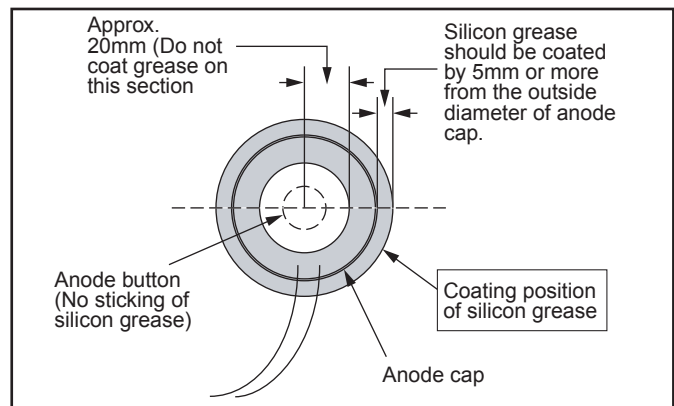


Fig.7

3.2 MEMORY IC REPLACEMENT

- This model uses the memory IC.
- This memory IC stores data for proper operation of the video and drive circuits.
- When replacing, be sure to use an IC containing this (initial value) data.

3.2.1 MEMORY IC REPLACEMENT PROCEDURE

1. Power off

Switch off the power and disconnect the power cord from the wall outlet.

2. Replace the memory IC

Be sure to use a memory IC written with the initial setting data.

3. Power on

Connect the power cord to the wall outlet and switch on the power.

4. Receiving channel setting

Refer to the OPERATING INSTRUCTIONS (USER'S GUIDE) and set the receive channels (Channels Preset) as described.

5. User settings

Check the user setting items according to the "FACTORY SETTING ITEM" table.

Where these do not agree, refer to the OPERATING INSTRUCTIONS (USER'S GUIDE) and set the items as described.

6. SERVICE MODE setting

Verify what to set in the SERVICE MODE, and set whatever is necessary(Fig.1) .

Refer to the SERVICE ADJUSTMENT for setting.

3.2.2 SERVICE MODE SETTING ITEMS

SERVICE MENU

SERVICE MENU

1. V/C(S)	2. DEF(D)
3. SOUND(A)	4. OTHERS(F)
5. 3L Y/C(LYC)	
7. LOW LIGHT	8. HIGH LIGHT
9. VCO	
11. I2C BUS	12. SYSTEM(SYS)

SELECT BY

EXIT BY EXIT

Fig.1

Setting items	Settings	Item No.
1. V/C (Video setting)	Adjust	S01~S48
2. DEF (Deflection setting)	Adjust	D01~D33
3. SOUND(A) (Audio setting)	Adjust	A01~A08
4. OTHERS [Do not adjust] (Factory setting)	Fixed	F01~F18
5. 3L Y/C [Do not adjust] (Y/C Separate setting)	Fixed	LYC01~LYC12
7. LOW LIGHT (White balance setting)	Adjust	---
8. HIGH LIGHT (White balance setting)	Adjust	---
9. VCO (VCO setting)	Adjust	---
11. I2C BUS [Do not adjust] (I ² C BUS setting)	Fixed	---
12.SYSTEM (SYS) (System constant setting)	Fixed	SYS01~SYS25

3.2.3 SETTINGS OF FACTORY SHIPMENT

3.2.3.1 BUTTON OPERATION

Setting item	Setting position
POWER	Off
CHANNEL	CH-02
VOLUME	10

3.2.3.2 REMOTE CONTROL DIRECT OPERATION

Setting item		Setting position
INPUT		TV
CHANNEL		CH-02
VOLUME		10
MUTING		OFF
DISPLAY		OFF
OFF TIMER		OFF
THEATER PRO		OFF
VIDEO STATUS		DYNAMIC
ASPECT		4:3
SOUND	A.H.S	OFF [AV-32F485]
	HYPER SURROUND	OFF [AV-32F475]
	BBE	ON

3.2.3.3 REMOTE CONTROL MENU OPERATION

(1) PICTURE ADJUST

Setting item	Setting position
TINT	0
COLOR	0
PICTURE	+8
BRIGHT	0
DETAIL	+8
COLOR TEMPERATURE	HIGH
NOISE MUTING	ON
VSM	ON

(2) SOUND ADJUST

Setting item	Setting position
BASS	0
TREBLE	0
BALANCE	0
MTS	STEREO
SMART SOUND	OFF

(3) CLOCK / TIMERS

Setting item	Setting position
SET CLOCK	OFF
ON / OFF TIMER	OFF
WORLD CLOCK	Refer to OPERATING INSTRUCTIONS

(4) INITIAL SETUP

Setting item	Setting position
LANGUAGE	ENG.
CLOSED CAPTION	OFF
FRONT PANEL LOCK	OFF
AUTO SHUT OFF	OFF
XDS ID	ON
VIDEO INPUT LABEL	Refer to OPERATING INSTRUCTIONS
V-CHIP	OFF

3.3 REPLACEMENT OF CHIP COMPONENT

3.3.1 CAUTIONS

- (1) Avoid heating for more than 3 seconds.
- (2) Do not rub the electrodes and the resist parts of the pattern.
- (3) When removing a chip part, melt the solder adequately.
- (4) Do not reuse a chip part after removing it.

3.3.2 SOLDERING IRON


- (1) Use a high insulation soldering iron with a thin pointed end of it.
- (2) A 30w soldering iron is recommended for easily removing parts.

3.3.3 REPLACEMENT STEPS


1. How to remove Chip parts

[Resistors, capacitors, etc.]

- (1) As shown in the figure, push the part with tweezers and alternately melt the solder at each end.



- (2) Shift with the tweezers and remove the chip part.




[Transistors, diodes, variable resistors, etc.]

- (1) Apply extra solder to each lead.



- (2) As shown in the figure, push the part with tweezers and alternately melt the solder at each lead. Shift and remove the chip part.




NOTE :

After removing the part, remove remaining solder from the pattern.


2. How to install Chip parts

[Resistors, capacitors, etc.]

- (1) Apply solder to the pattern as indicated in the figure.




- (2) Grasp the chip part with tweezers and place it on the solder. Then heat and melt the solder at both ends of the chip part.




[Transistors, diodes, variable resistors, etc.]

- (1) Apply solder to the pattern as indicated in the figure.
- (2) Grasp the chip part with tweezers and place it on the solder.
- (3) First solder lead **A** as indicated in the figure.



- (4) Then solder leads **B** and **C**.



SECTION 4 ADJUSTMENT

4.1 ADJUSTMENT PREPARATION

- (1) There are 2 ways of adjusting this TV : One is with the **REMOTE CONTROL UNIT** and the other is the conventional method using adjustment parts and components.
- (2) The adjustment using the **REMOTE CONTROL UNIT** is made on the basis of the initial setting values. The setting values which adjust the screen to the optimum condition can be different from the initial setting values.
- (3) Make sure that connection is correctly made AC to AC power source.
- (4) Turn on the power of the TV and measuring instruments for warning up for at least 30 minutes before starting adjustments.
- (5) If the receive or input signal is not specified, use the most appropriate signal for adjustment.
- (6) Never touch the parts (such as variable resistors, transformers and condensers) not shown in the adjustment items of this service adjustment.

4.2 PRESET SETTING BEFORE ADJUSTMENTS

Unless otherwise specified in the adjustment items, preset the following functions with the **REMOTE CONTROL UNIT**.

Item	Preset value
ASPECT	4:3
VIDEO STATUS	STANDARD
TINT / COLOR / PICTURE / BRIGHT / DETAIL	0
COLOR TEMPERATURE	LOW
VSM	OFF
BASS / TREBLE / BALANCE	0
MTS	STEREO
BBE	OFF
A.H.S [AV-32F485]	OFF
HYPER SORROUND [AV-32F475]	OFF

4.3 MEASURING INSTRUMENT AND FIXTURES

- DC voltmeter (or digital voltmeter)
- Oscilloscope
- Frequency counter
- Signal generator (Pattern generator) [NTSC]
- TV audio multiplex signal generator
- Remote control unit

4.4 ADJUSTMENT ITEMS

■CHECK ITEM

- B1 POWER SUPPLY check
- HIGH VOLTAGE HOLD DOWN check

■TUNER / IF CIRCUIT

- IF VCO adjustment

■FOCUS

- FOCUS adjustment

■DEFLECTION CIRCUIT

- V. SIZE / V. POSITION (4:3) adjustment
- V. SIZE / V. POSITION (16:9) adjustment
- H. POSITION / H. SIZE / SIDE PIN (4:3) / (16:9) adjustment


■VIDEO CIRCUIT

- WHITE BALANCE(High Light & Low Light) adjustment
- SUB BRIGHT adjustment
- SUB CONTRAST adjustment


■MTS CIRCUIT

- MTS INPUT LEVEL adjustment
- MTS SEPARATION adjustment

4.5 ADJUSTMENT LOCATIONS / WIRING

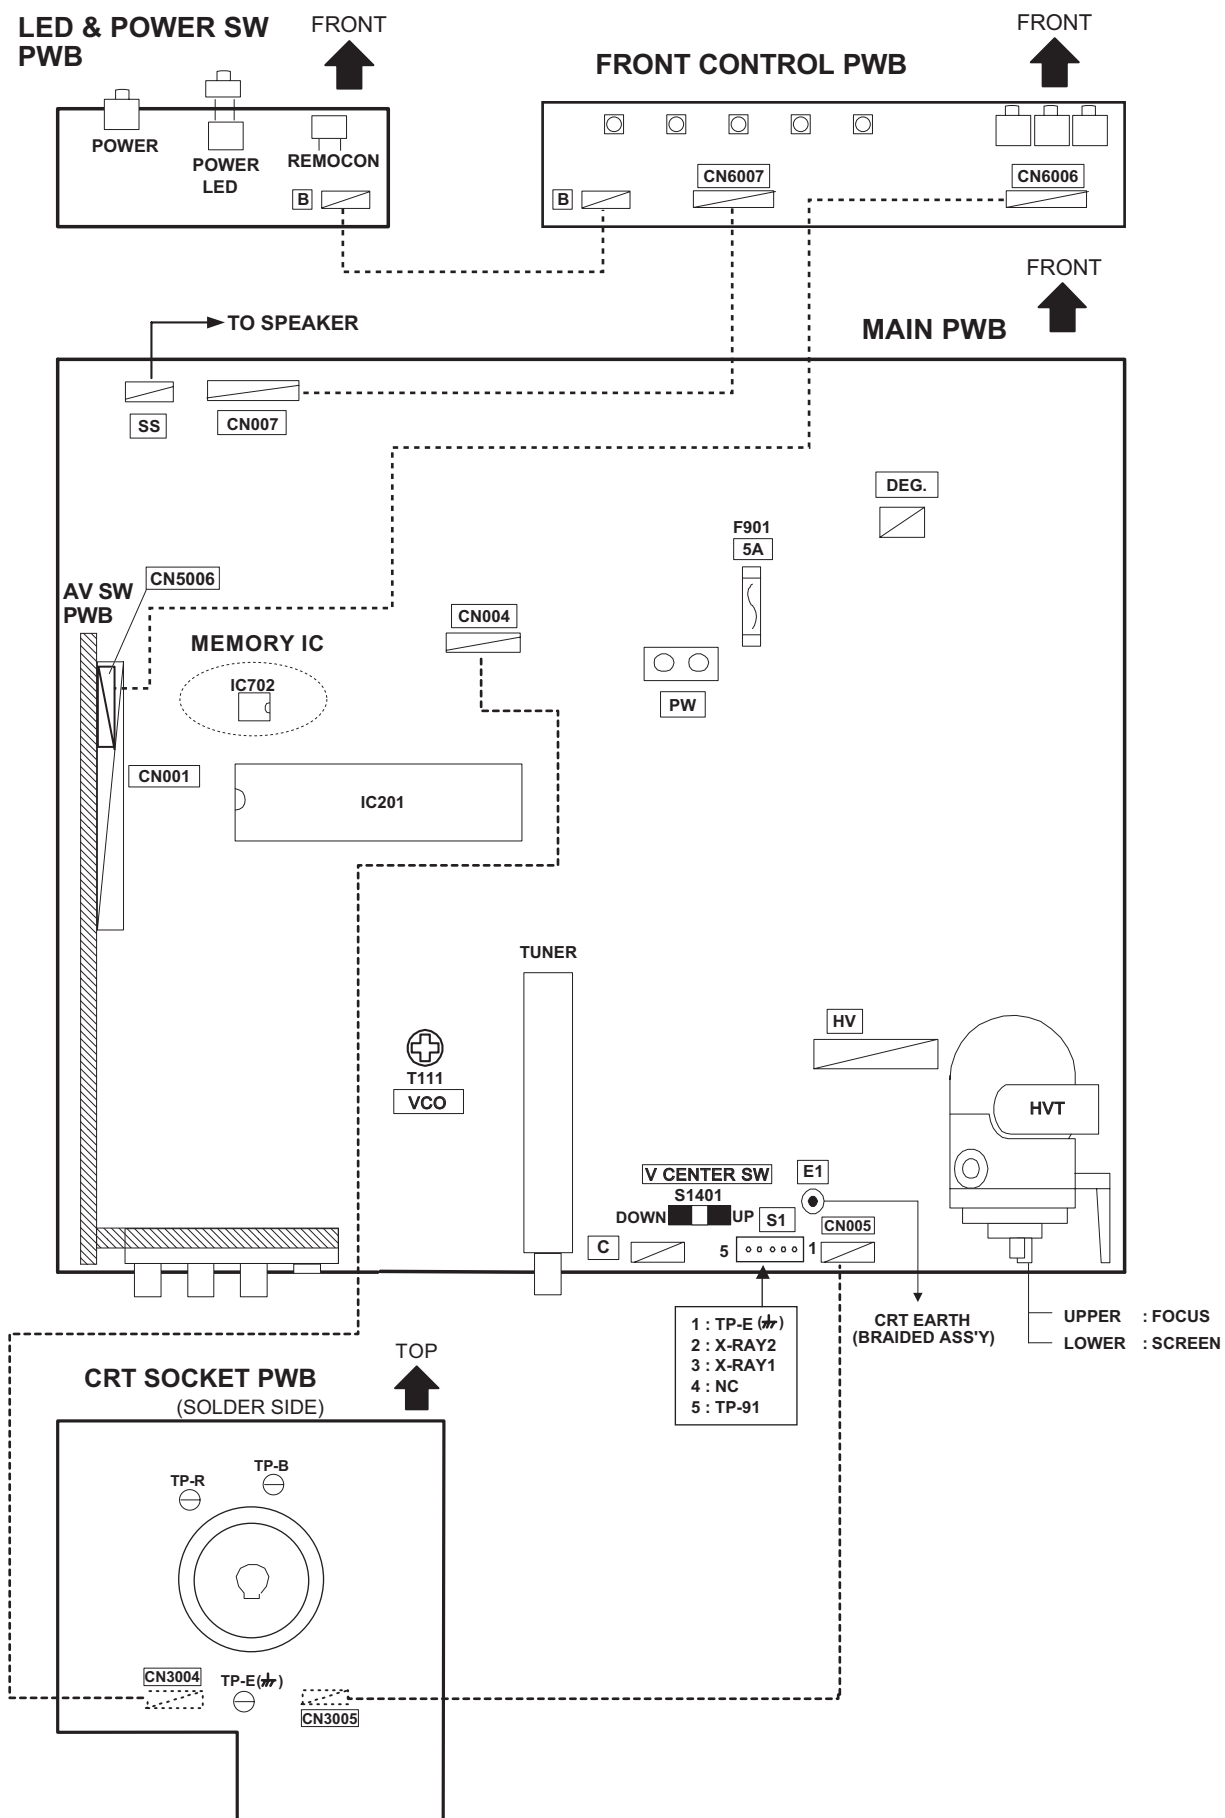

4.6 BASIC OPERATION OF SERVICE MODE

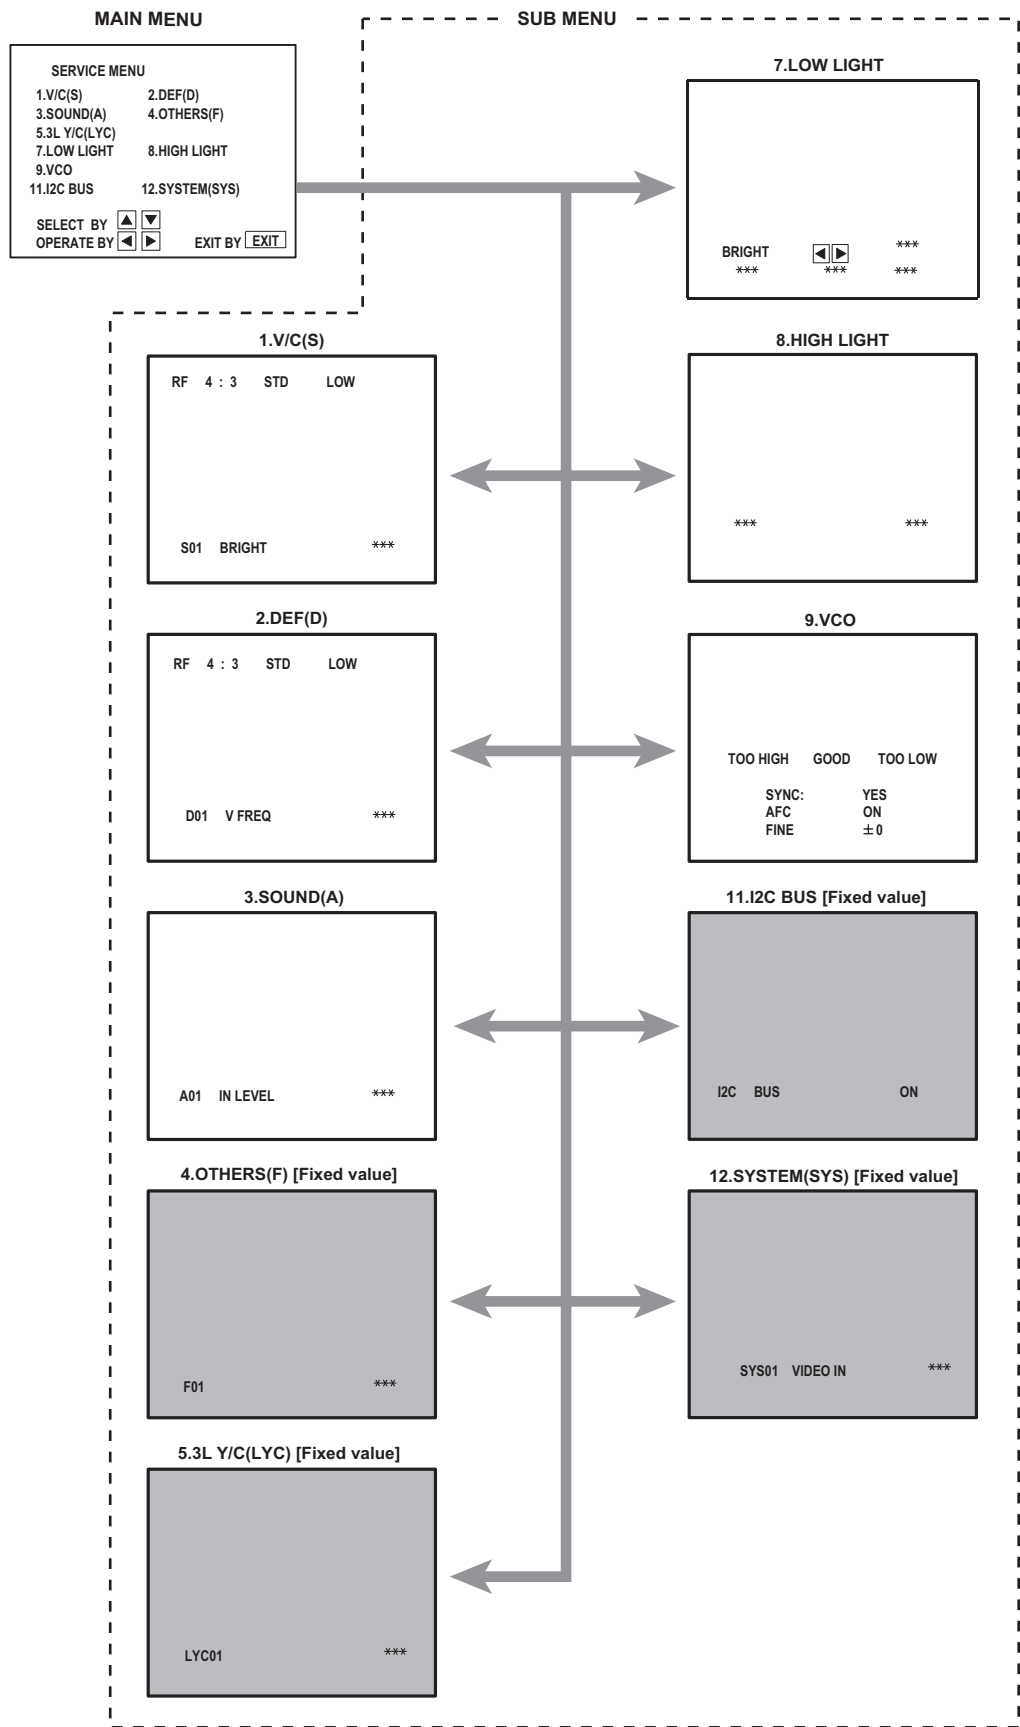

4.6.1 TOOL OF SERVICE MODE OPERATION

Operate the SERVICE MODE with the REMOTE CONTROL UNIT.

4.6.2 SERVICE MODE ITEMS

In general, basic setting (adjustments) items or verifications are performed in the SERVICE MODE.

1. V/C (S)	This sets the setting values of the VIDEO circuit.
2. DEF (D)	This sets the setting values of the DEFLECTION circuit.
3. SOUND (A)	This sets the setting values of the AUDIO circuit.
4. OTHERS (F)	This sets the setting values of the factory settings. [Do not adjust]
6. 3L Y/C(LYC)	This sets the setting values of the 3 line YC separation control circuit. [Do not adjust]
7. LOW LIGHT	This sets the setting values of the WHITE BALANCE (LOW LIGHT) control circuit.
8. HIGH LIGHT	This sets the setting values of the WHITE BALANCE (HIGH LIGHT) control circuit.
9. VCO	This sets the setting values of the VCO control circuit.
11. I2C BUS	This sets the setting values of the I ² C BUS control circuit. [Do not adjust]
12. SYSTEM(SYS)	This sets the setting values of the system control circuit. [Do not adjust]

4.6.3 HOW TO ENTER THE SERVICE MODE

- (1) Set to 0 minutes using the [SLEEP TIMER] key.
- (2) Press the [VIDEO STATUS] key and [DISPLAY] key simultaneously, then enter the SERVICE MODE.

NOTE:


Before entering the SERVICE MODE, confirm that the setting of TV / CATV switch of the REMOTE CONTROL UNIT is at the "TV" side and the setting of VCR / DVD switch is at the "VCR" side. If the switches have not been properly set, you cannot enter the SERVICE MODE.

4.6.4 HOW TO STORE OF SETTING VALUE

The setting value will be stored automatically when release the REMOTE CONTROL UNIT keys

4.6.5 HOW TO EXIT THE SERVICE MODE

Press the [EXIT] key to exit the SERVICE MODE.

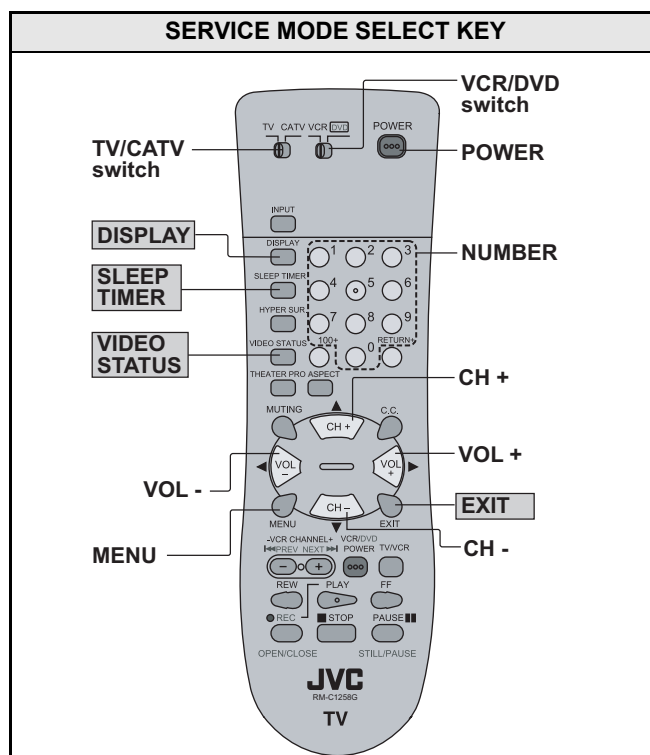


4.6.6 SERVICE MODE SETTING

1. V/C, 2. DEF

- Press [CH+] / [CH-] key
For scrolling up/down the adjustment item.
- Press [VOL+] / [VOL-] key
For scrolling up/down the data values.

NOTE:

The setting value will be stored automatically when release the REMOTE CONTROL UNIT keys.

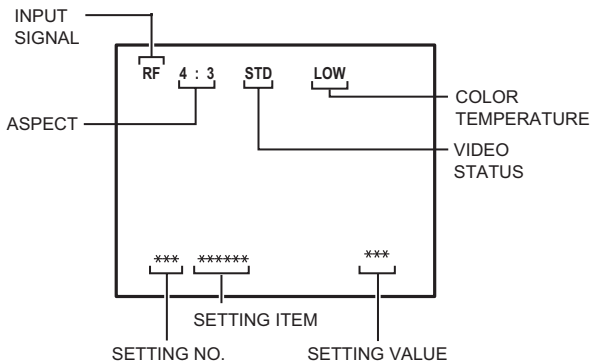

(1) INPUT SIGNAL

- RF : Antenna input
- COMP : External (component) input
- EXT : External (S / Composite) input

(2) ASPECT

- 4:3 : 4:3 screen mode
- 16:9 : 16:9 screen mode

(3) VIDEO STATUS

- STD : STANDARD
- THEA : THEATER

(4) COLOR TEMPERATURE


- HIGH : White balance high mode
- LOW : White balance low mode

3. SOUND (A)

- Press [CH+] / [CH-] key
For scrolling up/down the adjustment item.
- Press [VOL+] / [VOL-] key
For scrolling up/down the data values.

NOTE:

The setting value will be stored automatically when release the REMOTE CONTROL UNIT keys.




7. LOW LIGHT

The settings for LOW LIGHT is described in the WHITE BALANCE page of ADJUSTMENT PROCEDURE.

NOTE:

The setting value will be stored automatically when release the REMOTE CONTROL UNIT keys.

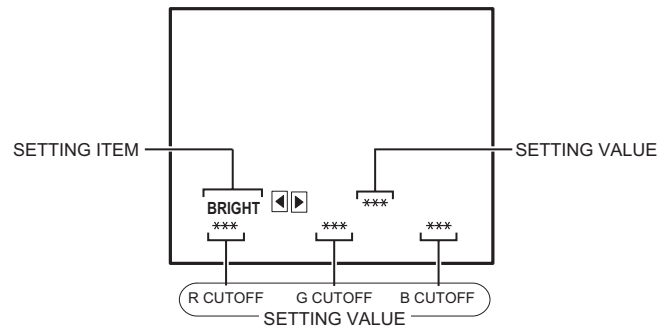


8. HIGH LIGHT

The settings for HIGH LIGHT is described in the WHITE BALANCE page of ADJUSTMENT PROCEDURE.


NOTE:

The setting value will be stored automatically when release the REMOTE CONTROL UNIT keys.



9. VCO

The setting for VCO is described in the IF VCO page of ADJUSTMENT PROCEDURE.

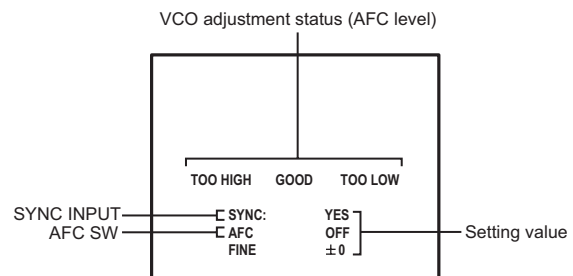

4.7 INITIAL SETTING VALUE OF SERVICE MODE

- (1) Adjustment of the SERVICE MODE is made on the basis of the initial setting values ; however, the new setting values which set the screen in its optimum condition may differ from the initial setting.
- (2) Do not change the initial setting values of the setting items NOT LISTED IN ADJUSTMENT PROCEDURE.
- (3) --- : This mark described in each table shows "Cannot adjust it."

4.7.1 [1.V/C(S)]

No.	Setting item	Variable range	Initial setting value				
			AV-32F475/Y AV-32F485/Y				
			RF		EXTERNAL (S / COMPOSITE)		EXTERNAL (COMPONENT)
			STANDARD		THEATER	STANDARD	STANDARD
			4:3	16:9	4:3	4:3	4:3
S01	BRIGHT	0 ~ 127	64	---	---	---	---
S02	PICTURE	0 ~ 127	60	---	---	---	---
S03	COLOR	0 ~ 127	48	---	---	---	45
S04	TINT	0 ~ 127	50	---	---	---	72
S05	DETAIL	0 ~ 63	35	---	---	40	40
S06	BRIGHT+-	-32 ~ +32	---	±0	+1	+4	+2
S07	PICT+-	-32 ~ +32	---	-8	-10	±0	±0
S08	COLOR+-	-32 ~ +32	---	±0	-3	+1	---
S09	TINT+-	-32 ~ +32	---	±0	-3	+9	---
S10	DETAIL+-	-32 ~ +32	---	---	±0	---	---

No.	Setting item	Variable range	Initial setting value				
			AV-32F475/Z AV-32F485/Z				
			RF		EXTERNAL (S / COMPOSITE)		EXTERNAL (COMPONENT)
			STANDARD		THEATER	STANDARD	STANDARD
			4:3	16:9	4:3	4:3	4:3
S01	BRIGHT	0 ~ 127	64	---	---	---	---
S02	PICTURE	0 ~ 127	60	---	---	---	---
S03	COLOR	0 ~ 127	45	---	---	---	42
S04	TINT	0 ~ 127	54	---	---	---	70
S05	DETAIL	0 ~ 63	35	---	---	40	40
S06	BRIGHT+-	-32 ~ +32	---	±0	+1	-2	±0
S07	PICT+-	-32 ~ +32	---	-8	-10	±0	±0
S08	COLOR+-	-32 ~ +32	---	±0	-3	±0	---
S09	TINT+-	-32 ~ +32	---	±0	-3	+9	---
S10	DETAIL+-	-32 ~ +32	---	---	±0	---	---

No.	Setting item	Variable range	Initial setting value							
			AV-32F475/Y AV-32F485/Y							
			RF / EXTERNAL (S / COMPOSITE)				EXTERNAL (COMPONENT)			
			STANDARD		THEATER		STANDARD		THEATER	
			LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH
S11	R CUT OFF	0 ~ 255	30	---	---	---	---	---	---	---
S12	G CUT OFF	0 ~ 255	30	---	---	---	---	---	---	---
S13	B CUT OFF	0 ~ 255	30	---	---	---	---	---	---	---
S14	R DRIVE	0 ~ 127	64	---	---	---	---	---	---	---
S15	B DRIVE	0 ~ 127	64	---	---	---	---	---	---	---
S16	R CUT +/-	-128 ~ +127	---	±0	±0	±0	±0	---	---	---
S17	G CUT +/-	-128 ~ +127	---	±0	±0	±0	+5	---	---	---
S18	B CUT +/-	-128 ~ +127	---	±0	±0	±0	±0	---	---	---
S19	R DRV +/-	-128 ~ +127	---	+5	+13	+7	±0	---	---	---
S20	B DRV +/-	-128 ~ +127	---	+6	-25	-9	±0	---	---	---
S21	NTSC MAT	0 ~ 3	3	3	1	1	2	2	1	1
S22	BLACK ST	0 ~ 3	2	---	2	---	---	---	---	---
S23	DC REST	0 ~ 1	1	---	1	---	---	---	---	---
S24	DCRSW	0 ~ 1	1	---	1	---	---	---	---	---

No.	Setting item	Variable range	Initial setting value							
			AV-32F475/Z AV-32F485/Z							
			RF / EXTERNAL (S / COMPOSITE)				EXTERNAL (COMPONENT)			
			STANDARD		THEATER		STANDARD		THEATER	
			LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH
S11	R CUT OFF	0 ~ 255	30	---	---	---	---	---	---	---
S12	G CUT OFF	0 ~ 255	30	---	---	---	---	---	---	---
S13	B CUT OFF	0 ~ 255	30	---	---	---	---	---	---	---
S14	R DRIVE	0 ~ 127	64	---	---	---	---	---	---	---
S15	B DRIVE	0 ~ 127	64	---	---	---	---	---	---	---
S16	R CUT +/-	-128 ~ +127	---	±0	±0	±0	±0	---	---	---
S17	G CUT +/-	-128 ~ +127	---	±0	±0	±0	±0	---	---	---
S18	B CUT +/-	-128 ~ +127	---	±0	±0	±0	±0	---	---	---
S19	R DRV +/-	-128 ~ +127	---	+5	+13	+7	±0	---	---	---
S20	B DRV +/-	-128 ~ +127	---	+6	-25	-9	±0	---	---	---
S21	NTSC MAT	0 ~ 3	3	3	1	1	2	2	1	1
S22	BLACK ST	0 ~ 3	2	---	2	---	---	---	---	---
S23	DC REST	0 ~ 1	1	---	1	---	---	---	---	---
S24	DCRSW	0 ~ 1	1	---	1	---	---	---	---	---

No.	Setting item	Variable range	Initial setting value		
			RF	EXTERNAL (S / COMPOSITE)	EXTERNAL (COMPONENT)
S25	ASSY SHRP	0 ~ 7	4	4	4
S26	BPF FO	0 ~ 1	0	0	---
S27	KILR OFF	0 ~ 1	0	0	---
S28	KILR SEN	0 ~ 1	1	1	---

No.	Setting item	Variable range	Initial setting value
S29	RGB MUTE	0 ~ 1	0
S30	BLUE B	0 ~ 1	0
S31	VIDEO SW	0 ~ 3	3
S32	CMP ABCL	0 ~ 1	0
S33	OSD ABL	0 ~ 1	0
S34	OSD CONT	0 ~ 63	8
S35	SUB CONT	0 ~ 15	5
S36	ABL GAIN	0 ~ 3	0
S37	ABL PNT	0 ~ 3	3
S38	Y GAMMA	0 ~ 3	1
S39	Y MUTE	0 ~ 1	0
S40	SVM GAIN	0 ~ 3	3
S41	SVM PH	0 ~ 3	2
S42	WPL	0 ~ 1	0
S43	COL GMM	0 ~ 1	0
S44	V1 GAIN	0 ~ 7	4
S46	VMOFF DE	-128 ~ +127	+3
S47	APC CLK	0 ~ 1	1
S48	PIP ADJ	0 ~ 15	8

4.7.2 [2. DEF (D)]

No.	Setting item	Variable range	Initial setting value					
			AV-32F475/Y AV-32F485/Y			AV-32F475/Z AV-32F485/Z		
			RF		EXTERNAL	RF		EXTERNAL
			4:3	16:9	4:3	4:3	16:9	4:3
D01	V FREQ	0 ~ 3	0	0	3	0	0	3
D02	AFC GAIN	0 ~ 3	0	0	2	0	0	2
D03	H POSI	0 ~ 31	19	---	19	19	---	19
D04	H POSI+-	-128 ~ +127	---	0	---	---	0	---
D05	V PHASE	0 ~ 7	0	---	0	0	---	0
D06	V PH+-	-128 ~ +127	---	0	---	---	0	---
D07	V SIZE	0 ~ 127	58	---	58	42	---	42
D08	V SIZE+-	-128 ~ +127	---	-30	---	---	-30	---
D09	V CENTER	0 ~ 63	32	---	32	32	---	32
D10	V CENT+-	-128 ~ +127	---	0	---	---	0	---
D11	V S CORR	0 ~ 15	9	---	9	8	---	8
D12	V S CO+-	-128 ~ +127	---	0	---	---	0	---
D13	V LIN	0 ~ 15	10	---	10	8	---	8
D14	V LIN+-	-128 ~ +127	---	0	---	---	0	---
D15	H SIZE	0 ~ 63	49	---	49	28	---	28
D16	H SIZE+-	-128 ~ +127	---	0	---	---	0	---
D17	WVMT TOP	0 ~ 3	0	1	0	0	1	0
D18	WVMT BTM	0 ~ 3	0	1	0	0	1	0
D19	EWCR TOP	0 ~ 31	14	---	14	11	---	11
D20	EWCR T+-	-128 ~ +127	---	0	---	---	0	---
D21	EWCR BTM	0 ~ 31	16	---	16	11	---	11
D22	EWCR B+-	-128 ~ +127	---	0	---	---	0	---
D23	EW PARA	0 ~ 63	35	---	35	31	---	31
D24	EW PARA+-	-128 ~ +127	---	0	---	---	-13	---
D25	V EHT	0 ~ 7	0	---	0	0	---	0
D26	V EHT+-	-128 ~ +127	---	0	---	---	0	---
D27	H EHT	0 ~ 7	0	---	0	0	---	0
D28	H EHT+-	-128 ~ +127	---	0	---	---	0	---
D29	TRAPEZ	0 ~ 63	34	---	34	36	---	36
D30	TRAPEZ+-	-128 ~ +127	---	0	---	---	0	---
D31	V AGC	0 ~ 1	0	0	0	0	0	0
D32	BLANK SW	0 ~ 1	0	0	0	0	0	0
D33	VRMP BI	0 ~ 1	0	0	0	0	0	0

4.7.3 [3. SOUND(A)]

No.	Setting item	Variable range	Initial setting value
A01	IN LEVEL	0 ~ 15	9
A02	LOW SEP	0 ~ 63	41
A03	HI SEP	0 ~ 63	36
A04	SAPC	0 ~ 1	0
A05	BBE BASS	-128 ~ +127	+6
A06	BBE TRE	-128 ~ +127	+6
A07	AHS MVE	-128 ~ +127	±0
A08	AHS MSC	-128 ~ +127	±0

4.7.4 [4. OTHERS(F)] [Do Not adjust : All fixed]

No.	Setting item	Variable range	Initial setting value
F01	OSD POSI	0 ~ 255	42
F02	OSD FREQ	0 ~ 255	90
F03	CCD POSI	0 ~ 255	48
F04	CCD FREQ	0 ~ 255	93
F05	CCD CONT	0 ~ 63	4
F06	PUR WBCK	0 ~ 1	0
F07	PUR CONT	0 ~ 63	2
F08	CCD PCHK	0 ~ 1	1
F09	VMOFF	0 ~ 1	0
F10	VNR CHK	0 ~ 255	3
F11	VCSN TM	0 ~ 255	5
F12	VM DAT A	-128 ~ +127	+8
F13	VM DAT B	-128 ~ +127	-8
F14	VM DAT C	-128 ~ +127	-20
F15	VM DAT D	-128 ~ +127	-32
F16	VM DAT E	0 ~ 1	1
F17	XDSID TM	0 ~ 255	15
F18	FM TRAP	0 ~ 1	0

4.7.5 [5. 3L Y/C(LYC)] [Do not adjust : All fixed]

No.	Setting item	Variable range	Initial setting value
LYC01	MODE	0 ~ 7	4
LYC02	VENH	0 ~ 7	1
LYC03	PDSOFF	0 ~ 1	0
LYC04	CB	0 ~ 1	0
LYC05	VNLR	0 ~ 15	2
LYC06	GSEL0	0 ~ 1	0
LYC07	GSEL1	0 ~ 1	1
LYC08	COR	0 ~ 3	0
LYC09	TRAP	0 ~ 1	1
LYC10	CHTRAP	0 ~ 1	0
LYC11	CBPF	0 ~ 1	0
LYC12	ENHOFF	0 ~ 1	0


4.7.6 [12. SYSTEM(SYS)] [Do not adjust : All fixed]

No.	Setting item	Variable range	Initial setting value	
			AV-32F475	AV-32F485
SYS01	VIDEO IN	0 ~ 4	3	3
SYS02	VSM	0 ~ 1	1	1
SYS03	CLR TEMP	0 ~ 1	1	1
SYS04	THEATER	0 ~ 1	1	1
SYS05	THEA PRO	0 ~ 1	1	1
SYS06	GAME MD	0 ~ 1	0	0
SYS07	AHS	0 ~ 1	0	1
SYS08	HYPER SR	0 ~ 1	1	0
SYS09	BBE	0 ~ 1	1	1
SYS10	S SOUND	0 ~ 1	1	1
SYS11	16:9 MD	0 ~ 3	1	1
SYS12	S CCD	0 ~ 1	0	1
SYS13	ID DISP	0 ~ 1	1	1
SYS14	CH LAB	0 ~ 1	1	1
SYS15	V LAB	0 ~ 1	1	1
SYS16	W CLOCK	0 ~ 1	1	1
SYS17	PIM	0 ~ 1	1	1
SYS18	PURITY	0 ~ 1	0	0
SYS19	VOL MUTE	0 ~ 1	1	1
SYS20	VCHIP	0 ~ 1	1	1
SYS21	VCHIP CA	0 ~ 1	1	1
SYS22	CCD	0 ~ 1	1	1
SYS23	HYPSCAN	0 ~ 1	1	1
SYS24	JVC LOGO	0 ~ 1	1	1
SYS25	PANORAMA	0 ~ 1	0	0

4.8 ADJUSTMENT PROCEDURE


4.8.1 CHECK ITEM

Item	Measuring instrument	Test point	Adjustment part	Description
B1 POWER SUPPLY check	DC voltmeter	S1 Connector 1-pin : TP-E 5-pin : TP-91 [MAIN PWB]		(1) Receive the black-and-white signal. (color off) (2) Connect the DC voltmeter to the TP-E and TP-91(B1) of S1 connector. (3) Confirm that the voltage is DC134.5V±2V.
HIGH VOLTAGE HOLD DOWN check	Resistor (19.0kΩ, 1/4W)	S1 connector 1-pin : TP-E 3-pin : X-RAY1 [MAIN PWB]		After repairing the high voltage hold down circuit. This circuit shall be checked to operate correctly. (1) Turn the power switch to on. (2) Refer to the figure, connect the resistor between S1 connector 1-pin and 3-pin. (3) Make sure that the screen picture disappears. (4) Disconnect the power plug. (5) Remove the resistor. (6) Again connect the power plug. (7) Turn the power switch to on. (8) Make sure that the normal picture is displayed on the screen.

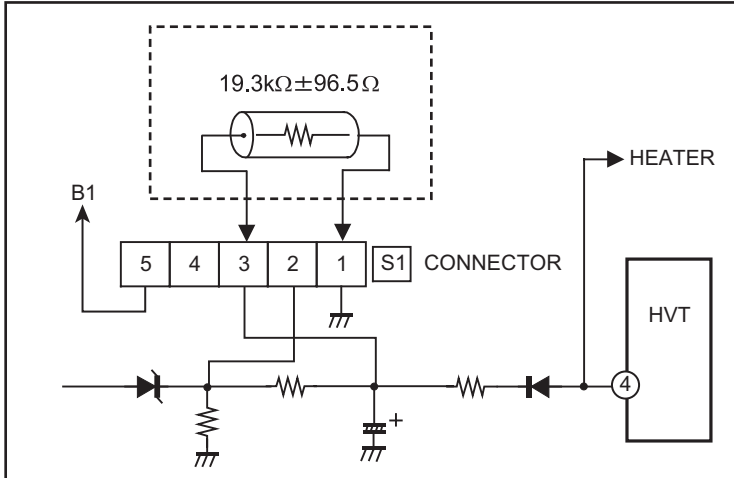

4.8.2 TUNER / IF CIRCUIT

Item	Measuring instrument	Test point	Adjustment part	Description
IF VCO	Remote control unit		[9.VCO] CW transf. (T111) [MAIN PWB]	It must not adjust without inputting the RF signal. (1) Receive the broadcast. (2) Select 9.VCO from the SERVICE MODE. (3) Set the "AFC" to "OFF" and "FINE" to "0". (4) Confirm that the color change from "TOO HIGH" to "TOO LOW" by CW transf. on MAIN PWB, and check the "SYNC" is "YES". (5) Adjust CW transf. until "GOOD" letters turns green. And then confirm that the "SYNC" is "YES" again. Adjustment can be done in this statement. (6) It return the "AFC" to "ON". (7) Push the [EXIT] key to exit the 9.VCO.

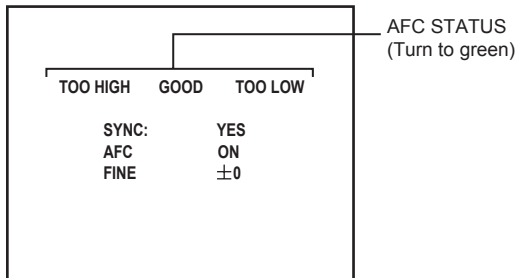




4.8.3 FOCUS

Item	Measuring instrument	Test point	Adjustment part	Description
FOCUS	Signal generator		FOCUS VR [In HVT]	(1) Receive the cross-hatch signal. (2) While watching at the screen, adjust the FOCUS VR to the vertical and horizontal lines will be thinnest and sharpest center horizontal line. (3) Make sure that the picture is in focus even when the screen gets darkened.

4.8.4 DEFLECTION CIRCUIT

- The setting (adjustment) using the remote control unit is made on the basis of the initial setting values.
- The setting values which adjust the screen to the optimum condition can be different from the initial setting values.

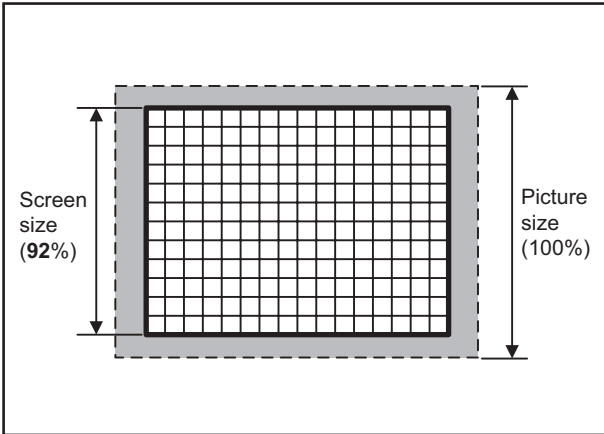Item	Measuring instrument	Test point	Adjustment part	Description											
V. SIZE / V. POSITION (4:3)	Signal generator Remote control unit		[2.DEF (D)] D05: V PHASE D07: V SIZE V. CENTER SW (S1421) [MAIN PWB]	(1) Receive the cross-hatch signal. (2) Select 2.DEF(D) from the SERVICE MODE. (3) Select the < D05 > (V PHASE). (4) Check that the value of < D05 > is 0. (5) Adjust the vertical screen size of the visible screen top to 92% with the < D07 > (V SIZE) and V CENTER SW. NOTE : - Bottom is to be located within 85%~95% range. - When vertical linearity is not even, adjust vertical linearity by < D13 > (V LIN) and < D11 > (VS CORR).											
 <table><tr><th rowspan="2">Setting item</th><th colspan="2">Initial setting value</th></tr><tr><th>AV-32F475/Y AV-32F485/Y</th><th>AV-32F475/Z AV-32F485/Z</th></tr><tr><td>D05: V PHASE</td><td colspan="2">0</td></tr><tr><td>D07: V SIZE</td><td>58</td><td>42</td></tr></table>					Setting item	Initial setting value		AV-32F475/Y AV-32F485/Y	AV-32F475/Z AV-32F485/Z	D05: V PHASE	0		D07: V SIZE	58	42
Setting item	Initial setting value														
	AV-32F475/Y AV-32F485/Y	AV-32F475/Z AV-32F485/Z													
D05: V PHASE	0														
D07: V SIZE	58	42													
V. SIZE / V. POSITION (16:9)	Signal generator Remote control unit		[2.DEF (D)] D08: V. SIZE+ D14: V. LIN+  <table><tr><th>Adjust point</th><th>Setting value</th></tr><tr><td>B</td><td>50mm</td></tr></table>	Adjust point	Setting value	B	50mm	V. SIZE / V. POSITION (4:3) adjustment should be finished. (1) Receive a black and white signal (color off). (2) Select 16:9 mode. (3) Confirm that the width of V. BLANKING is equal to adjustment value (B). (4) If the adjustment is not correct, select 2.DEF(D) from the SERVICE MODE. (5) Then adjust the < D08 > (V. SIZE+-) and < D14 > (V. LIN+-) to be same to adjustment value (B). NOTE : - When you change the VERTICAL adjustment value of the regular mode (4:3), review the adjustment of 16:9 mode again. <table><tr><th>Setting item</th><th>Initial setting value</th></tr><tr><td>D08: V SIZE+-</td><td>-30</td></tr><tr><td>D14: V LIN+-</td><td>0</td></tr></table>	Setting item	Initial setting value	D08: V SIZE+-	-30	D14: V LIN+-	0	
Adjust point	Setting value														
B	50mm														
Setting item	Initial setting value														
D08: V SIZE+-	-30														
D14: V LIN+-	0														

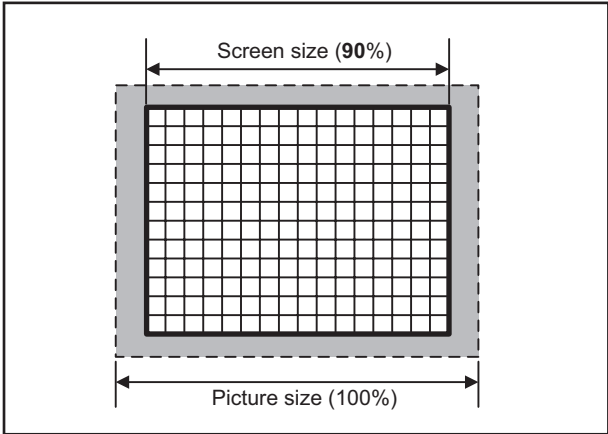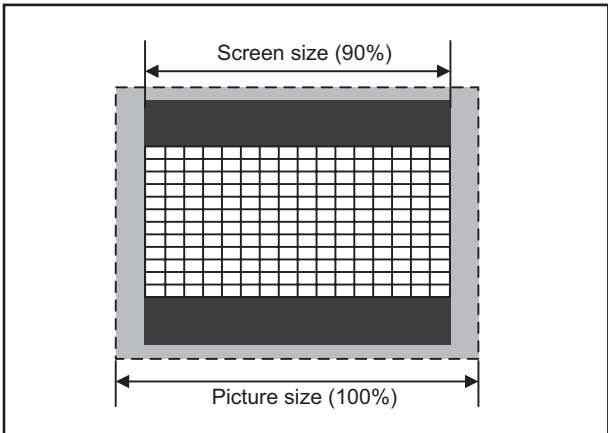Item	Measuring instrument	Test point	Adjustment part	Description
H. SIZE / H. POSITION / SIDE PIN (4:3)	Signal generator Remote control unit		[2.DEF (D)] D03: H POSI D15: H SIZE D23: EW PARA D19: EWCR TOP D21: EWCR BTM	V. SIZE / V. POSITION adjustment should be finished. (1) Receive a cross-hatch signal. (2) Select 2.DEF(D) from the SERVICE MODE. (3) Select the < D03 > (H POSI). (4) Adjust by H. POSITION to be same size at both side. (5) Adjust the horizontal size of the visible screen at both size to 90% with the < D15 > (H. SIZE). (6) Adjust the vertical line at both side to become linear line by < D23 > (EW PARA). (7) Confirm the linearity of vertical line and horizontal size. (8) If it is necessary, readjust 1.~7. NOTE : - If it is not straight the vertical upper and bottom corner line adjustment the upper and bottom corner pin by < D19 > (EWCR TOP) and < D21 > (EWCR BTM).
				
H. POSITION / H. SIZE / SIDE PIN (16:9)	Signal generator Remote control unit		[2.DEF (D)] D16: H SIZE+- D04: H POSI+- D24: EW PARA+- D20: EWCR T+- D22: EWCR B+-	V. SIZE / V. POSITION adjustment should be finished. H. SIZE / H. POSITION / SIDE PIN adjustment should be finished. (Regular size(4:3)). (1) Receive the cross-hatch signal. (2) Select 16:9 mode. (3) Confirm both sides of cross-hatch to be the adjustment value 90%. (4) Select 2.DEF(D) from the SERVICE MODE. (5) If it not correct, adjust to be value 90% at the < D16 > (H SIZE+-) and < D04 > (H POSI+-). (6) Confirm the second vertical line from left to right to be straight. (7) If it is not straight, adjust to be straight by < D24 > (EW PARA+-), < D20 > (EWCR T+-) and < D22 > (EWCR B+-). NOTE : - Review the adjustment of 16:9 mode again when you change the SIDE PIN adjustment value of regular (4:3) mode.
				

4.8.5 VIDEO CIRCUIT

Item	Measuring instrument	Test point	Adjustment part	Description
WHITE BALANCE (LOW LIGHT)	Signal generator		[1.V/C (S)] S01: BRIGHT S11: R CUTOFF S12: G CUTOFF S13: B CUTOFF	(1) Receive the black and white signal (color off). (2) Select the 1.V/C (S) from the SERVICE MODE. (3) Confirm the initial setting value of < S11 > (R CUTOFF), < S12 > (G CUTOFF), < S13 > (B CUTOFF) and < S01 > (BRIGHT). (4) Return to the main menu in SERVICE MODE. (5) Select the 7.LOW LIGHT from the SERVICE MODE. (6) Display a single horizontal line by pressing the [1] key. (7) Turn the SCREEN VR all the way to the left. (8) Turn the SCREEN VR gradually to the right from the left until either one of the red, blue or green colors appears faintly. (9) Adjust the two colors which did not appear until the single horizontal line that is displayed becomes white using the [4]~[9] keys. (10) Turn the SCREEN VR until the single horizontal line is displayed faintly. (11) Press the [2] key to cancel the single horizontal line mode. (12) Return to the main menu in SERVICE MODE. (13) Select the 1.V/C (S) from the SERVICE MODE. (14) Adjust the BRIGHT level to become the black component shines white slightly by < S01 >. (15) Confirm that whether the color ingredient of R, G, or B is visible to the black component, which shines white slightly. (16) When the color ingredient can be seen, two colors other than a visible color are adjusted, and it is made to look white. (17) Return the value of < S01 > to initial setting value. • The [3] (EXIT) key is the cancel key for the WHITE BALANCE.
	Remote control unit		[7.LOW LIGHT] SCREEN VR [in HVT]	

LOW LIGHT adjustment mode

SETTING ITEM

SETTING VALUE

BRIGHT

R CUTOFF

G CUTOFF

B CUTOFF

SETTING VALUE

SINGLE HORIZONTAL LINE

Setting item	Initial setting value
S11: R CUT OFF	30
S12: G CUT OFF	30
S13: B CUT OFF	30
S01: BRIGHT	64

REMOTE CONTROL UNIT

H.LINE ON

H.LINE OFF

EXIT

①

②

③

R CUTOFF▲

G CUTOFF▲

B CUTOFF▲

④

⑤

⑥

R CUTOFF▼



G CUTOFF▼

B CUTOFF▼


⑦


⑧

⑨

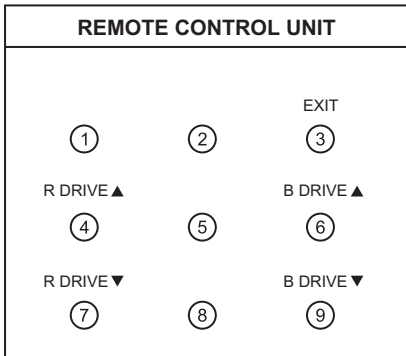Item	Measuring instrument	Test point	Adjustment part	Description						
WHITE BALANCE (HIGH LIGHT)	Signal generator		[1.V/C (S)] S14: R DRIVE S15: B DRIVE	(1) Receive the black-and-white signal (color off). (2) Select the 1.V/C (S) from the SERVICE MODE. (3) Set the initial setting value of < S14 > (R DRIVE) and < S15 > (B DRIVE). (4) Return to the main menu in SERVICE MODE. (5) Select the 8.HIGH LIGHT from the SERVICE MODE. (6) Adjust the screen until it becomes white using the [4] , [6], [7] and [9] keys. • The [3] (EXIT) key is the cancel key for the WHITE BALANCE.						
	Remote control unit		[8.HIGH LIHGT]							
HIGH LIGHT adjustment mode  <table><tr><th>Setting item</th><th>Initial setting value</th></tr><tr><td>S14: R DRIVE</td><td>64</td></tr><tr><td>S15: B DRIVE</td><td>64</td></tr></table>				Setting item	Initial setting value	S14: R DRIVE	64	S15: B DRIVE	64	REMOTE CONTROL UNIT 
Setting item	Initial setting value									
S14: R DRIVE	64									
S15: B DRIVE	64									
SUB BRIGHT	Remote control unit		[1.V/C (S)] S01: BRIGHT	(1) Receive the any broadcast. (2) Select the 1.V/C (S) from the SERVICE MODE. (3) Select < S01 > (BRIGHT). (4) Set the initial setting value of the < S01 >. (5) If the brightness is not the best with the initial setting value, make fine adjustment of the < S01 > until you get the optimum brightness.						
<table><tr><th>Setting item</th><th>Initial setting value</th></tr><tr><td>S01: BRIGHT</td><td>64</td></tr></table>					Setting item	Initial setting value	S01: BRIGHT	64		
Setting item	Initial setting value									
S01: BRIGHT	64									
SUB CONTRAST	Remote control unit		[1.V/C (S)] S02: PICTURE	(1) Receive the any broadcast. (2) Select the 1.V/C (S) from the SERVICE MODE. (3) Select < S02 > (PICTURE). (4) Set the initial setting value of the < S02 >. (5) If the contrast is not the best with the initial setting value, make fine adjustment of the < S02 > until you get the optimum contrast.						
<table><tr><th>Setting item</th><th>Initial setting value</th></tr><tr><td>S02: PICTURE</td><td>60</td></tr></table>					Setting item	Initial setting value	S02: PICTURE	60		
Setting item	Initial setting value									
S02: PICTURE	60									

4.8.6 MTS CIRCUIT

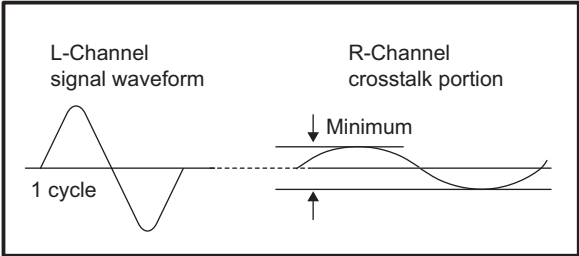Item	Measuring instrument	Test point	Adjustment part	Description						
MTS INPUT LEVEL	Remote control unit		[3.SOUND (A)] A01: IN LEVEL	(1) Receive the any broadcast. (2) Select the 3.SOUND (A) from the SERVICE MODE. (3) Select the < A01 > (IN LEVEL). (4) Set the intal setting value of the < A01 > . <table border="1"><thead><tr><th>Setting item</th><th>Initial setting value</th></tr></thead><tbody><tr><td>A01: IN LEVEL</td><td>9</td></tr></tbody></table>	Setting item	Initial setting value	A01: IN LEVEL	9		
	Setting item	Initial setting value								
A01: IN LEVEL	9									
MTS SEPARATION	TV audio multiplex signal generator	R OUT L OUT [AUDIO OUT]	[3.SOUND (A)] A02: LOW SEP. A03: HI SEP.	(1) Input the stereo L signal (300Hz) from the TV audio multiplex signal generator to the antenna terminal. (2) Connect an oscilloscope to R OUT pin of the AUDIO OUT, and display one cycle portion of the 300Hz signal. (3) Select the 3.SOUND (A) from the SERVICE MODE. (4) Select the < A02 > (LOW SEP.). (5) Set the initial setting value of the < A02 > . (6) Adjust the < A02 > so that the stroke element of the 300Hz signal will become minimum. (7) Change the connection of the oscilloscope to L OUT pin of the AUDIO OUT, and enlarge the voltage axis. (8) Change the signal to 3kHz, and similarly adjust the < A03 > (HI SEP.). <table border="1"><thead><tr><th>Setting item</th><th>Initial setting value</th></tr></thead><tbody><tr><td>A02: LOW SEP</td><td>41</td></tr><tr><td>A03: HI SEP</td><td>36</td></tr></tbody></table>	Setting item	Initial setting value	A02: LOW SEP	41	A03: HI SEP	36
	Setting item	Initial setting value								
A02: LOW SEP	41									
A03: HI SEP	36									
L-Channel signal waveform R-Channel crosstalk portion 1 cycle Minimum 										

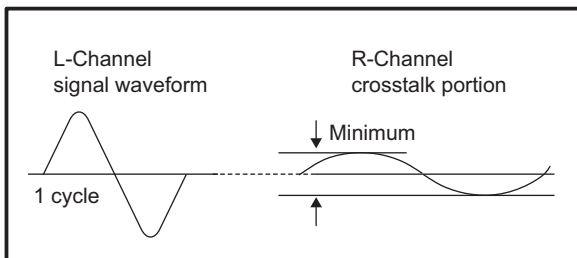

SECTION 5

TROUBLE SHOOTING

This service manual does not describe TROUBLESHOOTING.

PARTS LIST

CAUTION

- The parts identified by the Δ symbol are important for the safety . Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P.W. BOARD Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.

ABBREVIATIONS OF RESISTORS, CAPACITORS AND TOLERANCES

RESISTORS		CAPACITORS	
CR	Carbon Resistor	C CAP.	Ceramic Capacitor
FR	Fusible Resistor	E CAP.	Electrolytic Capacitor
PR	Plate Resistor	M CAP.	Mylar Capacitor
VR	Variable Resistor	CH CAP.	Chip Capacitor
HV R	High Voltage Resistor	HV CAP.	High Voltage Capacitor
MF R	Metal Film Resistor	MF CAP.	Metalized Film Capacitor
MG R	Metal Glazed Resistor	MM CAP.	Metalized Mylar Capacitor
MP R	Metal Plate Resistor	MP CAP.	Metalized Polystyrol Capacitor
OM R	Metal Oxide Film Resistor	PP CAP.	Polypropylene Capacitor
CMF R	Coating Metal Film Resistor	PS CAP.	Polystyrol Capacitor
UNF R	Non-Flammable Resistor	TF CAP.	Thin Film Capacitor
CH V R	Chip Variable Resistor	MPP CAP.	Metalized Polypropylene Capacitor
CH MG R	Chip Metal Glazed Resistor	TAN. CAP.	Tantalum Capacitor
COMP. R	Composition Resistor	CH C CAP.	Chip Ceramic Capacitor
LPTC R	Linear Positive Temperature Coefficient Resistor	BP E CAP.	Bi-Polar Electrolytic Capacitor
		CH AL E CAP.	Chip Aluminum Electrolytic Capacitor
		CH AL BP CAP.	Chip Aluminum Bi-Polar Capacitor
		CH TAN. E CAP.	Chip Tantalum Electrolytic Capacitor
		CH AL BP E CAP.	Chip Tantalum Bi-Polar Electrolytic Capacitor

RESISTORS									
F	G	J	K	M	N	R	H	Z	P
±1%	±2%	±5%	±10%	±20%	±30%	+30% -10%	+50% -10%	+80% -20%	+100% -0%

CONTENTS

USING P.W. BOARD & REMOTE CONTROL UNIT	3-3
EXPLODED VIEW PARTS LIST -1	3-3
EXPLODED VIEW -1	3-3
EXPLODED VIEW PARTS LIST -2	3-4
EXPLODED VIEW -2	3-5
PRINTED WIRING BOARD PARTS LIST [AV-32F475/Y]	
MAIN P.W. BOARD ASS'Y (SGJ-1553A-M2)	3-6
CRT SOCKET P.W. BOARD ASS'Y (SGJ-3515A-M2)	3-9
AV SELECTOR P.W. BOARD ASS'Y (SGJ-5506A-M2)	3-9
FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6506A-M2)	3-10
LED & POWER SW P.W. BOARD ASS'Y (SGJ-7506A-M2)	3-11
PRINTED WIRING BOARD PARTS LIST [AV-32F475/Z]	
MAIN P.W. BOARD ASS'Y (SGJ-1554A-M2)	3-12
CRT SOCKET P.W. BOARD ASS'Y (SGJ-3514A-M2)	3-15
AV SELECTOR P.W. BOARD ASS'Y (SGJ-5506A-M2)	3-15
FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6506A-M2)	3-15
LED & POWER SW P.W. BOARD ASS'Y (SGJ-7506A-M2)	3-15
PRINTED WIRING BOARD PARTS LIST [AV-32F485/Y]	
MAIN P.W. BOARD ASS'Y (SGJ-1558A-M2)	3-16
CRT SOCKET P.W. BOARD ASS'Y (SGJ-3515A-M2)	3-19
AV SELECTOR P.W. BOARD ASS'Y (SGJ-5506A-M2)	3-19
FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6506A-M2)	3-19
LED & POWER SW P.W. BOARD ASS'Y (SGJ-7506A-M2)	3-19
PRINTED WIRING BOARD PARTS LIST [AV-32F485/Z]	
MAIN P.W. BOARD ASS'Y (SGJ-1559A-M2)	3-20
CRT SOCKET P.W. BOARD ASS'Y (SGJ-3514A-M2)	3-23
AV SELECTOR P.W. BOARD ASS'Y (SGJ-5506A-M2)	3-23
FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6506A-M2)	3-23
LED & POWER SW P.W. BOARD ASS'Y (SGJ-7506A-M2)	3-23
REMOTE CONTROL UNIT PARTS LIST (RM-C1258G-1H)	3-23
PACKING	3-24
PACKING PARTS LIST	3-24


USING P.W. BOARD & REMOTE CONTROL UNIT

P.W.B ASS'Y	AV-32F475/Y	AV-32F475/Z	AV-32F485/Y	AV-32F485/Z
MAIN P.W.B	SGJ-1553A-M2	SGJ-1554A-M2	SGJ-1558A-M2	SGJ-1559A-M2
CRT SOCKET P.W.B	SGJ-3515A-M2	SGJ-3514A-M2	SGJ-3515A-M2	SGJ-3514A-M2
AV SELECTOR P.W.B	SGJ-5506A-M2	←	←	←
FRONT CONTROL P.W.B	SGJ-6506A-M2	←	←	←
LED & POWER SW P.W.B	SGJ-7506A-M2	←	←	←
REMOTE CONTROL UNIT	RM-C1258G-1H	←	←	←

EXPLODED VIEW PARTS LIST -1

△ Ref.No.	Part No.	Part Name	Description	Local
1	LC41193-003A-C	JVC MARK		
2	LC32242-001A-A	RC LENS		
△ 100	LC11531-004A-A	FRONT CABINET ASSY	Inc.No.101-105	
101	LC21239-001D-A	DOOR		
102	CM48229-00A-C	DOOR LATCH		
△ 103	LC32240-001A-A	POWER KNOB		
104	CM36481-002A-A	SPRING		
105	LC32241-001B-A	OPERATION SHEET		


EXPLODED VIEW -1

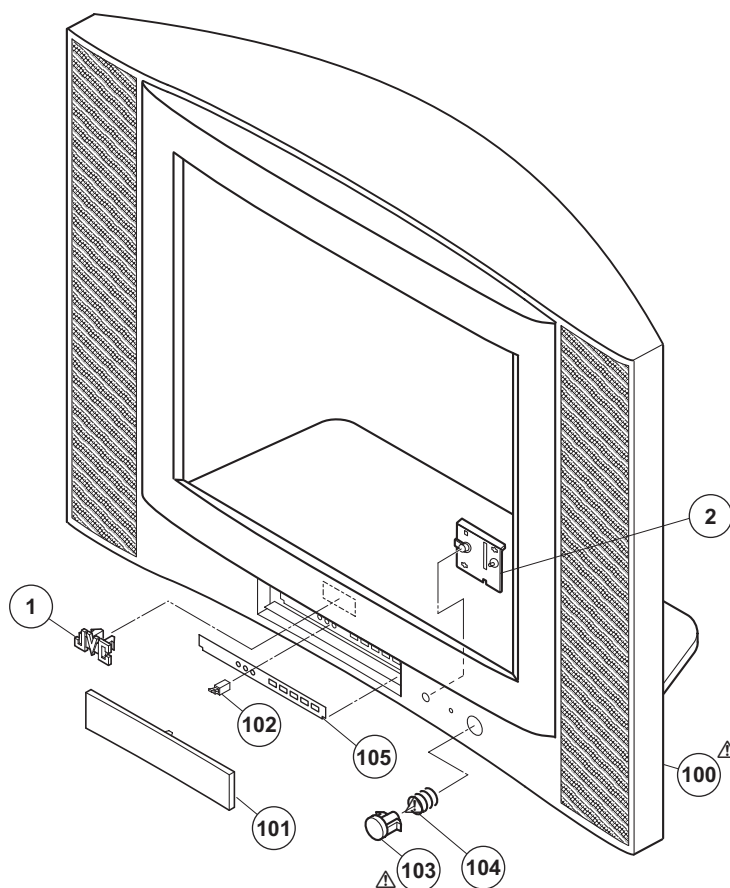

EXPLODED VIEW PARTS LIST -2

△	Ref.No.	Part No.	Part Name	Description	Local
△	V01	A80AKS90X03	ITC	Inc.DEF YOKE/PC MAGNET/WEDGE	AV-32F475/Y,AV-32F485/Y
△	V01	A80ERF082X17	ITC	Inc.DEF YOKE/PC MAGNET/WEDGE	AV-32F475/Z,AV-32F485/Z
△	L01	QQW0107-001	DEG COIL		
△	T502	QQH0154-001	FB TRANSF		
	3	A48457-4-S	SPRING		
	4	WJY0016-002A	E-BRAIDED ASSY		
	5	WJY0013-003A	E-BRAIDED ASSY		
	6	LC21260-001B-A	CONTROL KNOB		
△	7	GQ30034-001B-A	WARNING LABEL		
△	8	LC10883-001D-A	CHASSIS BASE		
△	9	LC20899-006A-A	TERMINAL BOARD		
	10	QYSBSB3010Z	TAP SCREW	3.0mm x 10mm(x4)	
△	11	QMPD390-200-JS	POWER CORD(US/CA)	2m BLACK	
△	12	LC20106-001D-A	POWER CORD CLAMP		
△	13	LC11533-001C-A	REAR COVER		
	14	QYSBSFG4016Z	TAP SCREW	4.0mm x 16mm(x11)	
△	15	GQ30032-001A-A	RATING LABEL		
	16	QAS0243-001	SPEAKER	SP01/SP02(x2)	
	17	LC21261-001B-A	SP HOLDER	(x2)	
	18	LC41029-001B-A	TAPPING SCREW	(x4)	
	19	LC40226-003A-H	SPACER	(x4)	
△	20	SGJ-3515A-M2	CRT SOCKET PWB		AV-32F475/Y,AV-32F485/Y
△	20	SGJ-3514A-M2	CRT SOCKET PWB		AV-32F475/Z,AV-32F485/Z
△	21	SGJ-6506A-M2	CONTROL PWB		
△	22	SGJ-7506A-M2	LED & POWER SW PWB		
△	23	SGJ-5506A-M2	AV SELECTOR PWB		
△	24	SGJ-1553A-M2	MAIN PWB		AV-32F475/Y
△	24	SGJ-1554A-M2	MAIN PWB		AV-32F475/Z
△	24	SGJ-1558A-M2	MAIN PWB		AV-32F485/Y
△	24	SGJ-1559A-M2	MAIN PWB		AV-32F485/Z

EXPLODED VIEW -2

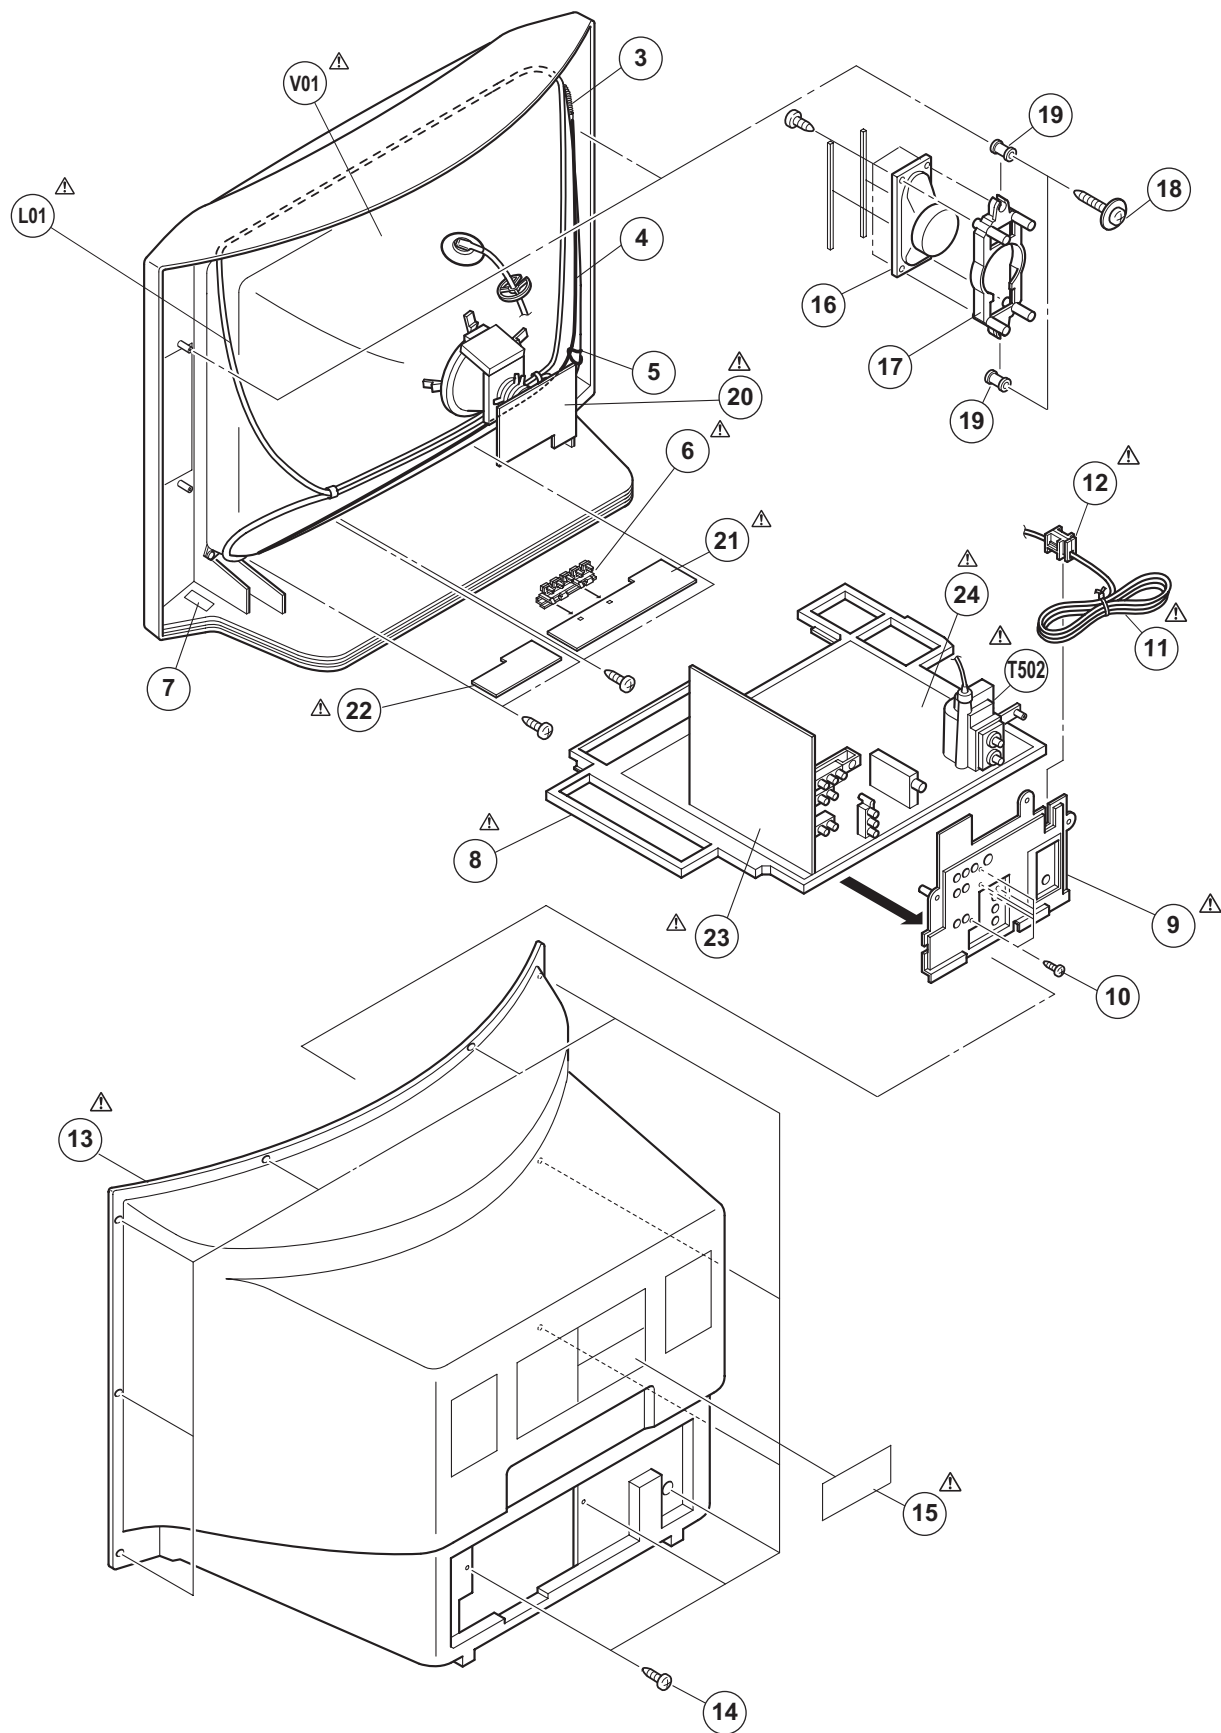

PRINTED WIRING BOARD PARTS LIST [AV-32F475M]

MAIN P.W. BOARD ASS'Y (SGJ-1553A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC101	M52342FP-X	IC	(SERVICE)
IC201	TM8812CSDNG5DB9	IC(MCU)	
IC421	LA78041	IC	
IC621	TFA9843J/N1	IC	
IC651	NJM2150AD	IC	
IC702	AT24C08-27F485	IC	
IC703	S-80840CNY-T	IC	
IC704	AN78L05-T	IC	
IC851	L7812CP	IC	
IC852	L7809CP	IC	
IC853	L7805CP	IC	
△IC911	STR-G9626-F3	IC	
△IC921	SE135N	IC	
Q001	UN2212-X	TRANSISTOR	H.OUT
Q101	2SC5083/L-P/-T	TRANSISTOR	
Q131	2SA1530A/QR/-X	SI TRANSISTOR	
Q161	2SC3928A/QR/-X	TRANSISTOR	
Q211	2SC3928A/QR/-X	TRANSISTOR	
Q232	2SC3928A/QR/-X	TRANSISTOR	
Q233	2SC3928A/QR/-X	TRANSISTOR	
Q352	2SC3928A/QR/-X	TRANSISTOR	
Q353	2SC3928A/QR/-X	TRANSISTOR	
Q501	2SC4212/Z1/	TRANSISTOR	
△Q511	2SD2645-YD	TRANSISTOR	
△Q531	2SC2785/JH/-T	SI TRANSISTOR	
Q532	2SA1530A/QR/-X	SI TRANSISTOR	
Q541	2SA1530A/QR/-X	SI TRANSISTOR	
Q542	2SA1530A/QR/-X	SI TRANSISTOR	
Q543	2SD1267A/QP/	POW TRANSISTOR	
Q621	2SD601A/QR/-X	TRANSISTOR	
Q622	2SD601A/QR/-X	TRANSISTOR	
Q623	2SA1530A/QR/-X	SI TRANSISTOR	
Q625	2SD601A/QR/-X	TRANSISTOR	
Q701	2SA1530A/QR/-X	SI TRANSISTOR	
Q951	2SD1383K/AB/-X	SI TRANSISTOR	
Q971	2SA1208/ST/Z1-T	TRANSISTOR	
D305	1SS133-T2	DIODE	
D306	1SS133-T2	DIODE	
D307	1SS133-T2	DIODE	
D308	1SS133-T2	DIODE	
D309	1SS133-T2	DIODE	
D310	1SS133-T2	DIODE	
D352	MTZJ9.1C-T2	Z DIODE	
D353	1SS133-T2	DIODE	
D354	MTZJ3.3A-T2	Z DIODE	
D421	1N4003-T2	SI DIODE	
D422	MTZJ75-T2	Z DIODE	
D501	RH3G-F1	SI DIODE	
D502	RU3AM-LFC4	SI DIODE	
D521	RH1S-T3	SI DIODE	
D523	RGPI0J-04TS-T3	SI DIODE	
D525	1SS81-T5	SI DIODE	
D526	1SS81-T5	SI DIODE	
D527	1SR124-400A-T2	SI DIODE	
D529	MTZJ9.1C-T2	Z DIODE	
△D531	MA4068N/Z1/-T2	Z DIODE	
D535	1SS133-T2	DIODE	
D601	MTZJ9.1C-T2	Z DIODE	
D602	MTZJ9.1C-T2	Z DIODE	
D603	MTZJ9.1C-T2	Z DIODE	
D621	1SS133-T2	DIODE	
D623	1SS133-T2	DIODE	
D626	1SS133-T2	DIODE	
D703	MTZJ5.6B-T2	Z DIODE	
D704	MTZJ5.6B-T2	Z DIODE	
D705	1SS133-T2	DIODE	
D706	MTZJ5.6B-T2	Z DIODE	
D707	MTZJ5.6B-T2	Z DIODE	
D708	MTZJ5.6B-T2	Z DIODE	
D709	MTZJ5.6B-T2	Z DIODE	
D723	MTZJ5.6B-T2	Z DIODE	
△D901	GSIB460	BRIDGE DIODE	
D910	MA700A-T2	SB DIODE	
D911	RGPI0J-04TS-T3	SI DIODE	
D912	RGPI0J-04TS-T3	SI DIODE	
D913	1SS133-T2	DIODE	
D914	1SS133-T2	DIODE	
D915	SARS01-T2	SI DIODE	
D917	MTZJ30A-T2	Z DIODE	
D918	MTZJ5.1C-T2	Z DIODE	

△Ref No.	Part No.	Part Name	Description Local
D920	1SS133-T2	DIODE	
D931	RU4AM-LFT2	SI DIODE	
D933	RU3YX-LFC4	SI DIODE	
D935	RU3YX-LFC4	SI DIODE	
D937	RU3YX-LFC4	SI DIODE	
D941	MTZJ33A-T2	Z DIODE	
D945	MTZJ9.1B-T2	Z DIODE	
D952	1SS133-T2	DIODE	
D953	1SS133-T2	DIODE	
D954	1N4002G-T2	FR DIODE	
D955	1N4002G-T2	FR DIODE	
D956	1N4002G-T2	FR DIODE	
D957	1N4002G-T2	FR DIODE	
D972	MTZJ15C-T2	Z DIODE	
D973	1SS133-T2	DIODE	
C001	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C003	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C004	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M
C005	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C101	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C104	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C105	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C106	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C107	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C113	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C114	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C116	NCB31CK-224X	C CAPACITOR	0.22uF 16V K
C119	NDC31HJ-681X	C CAPACITOR	680pF 50V J
C120	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C124	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C131	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C161	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C162	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C163	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C164	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C165	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C166	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C167	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C202	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C203	NCB31HK-152X	C CAPACITOR	1500pF 50V K
C211	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M
C212	NDC31HJ-100X	C CAPACITOR	10pF 50V J
C221	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C222	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
C223	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C233	NDC31HJ-680X	C CAPACITOR	68pF 50V J
C237	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C241	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C242	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C243	QETN0JM-227Z	E CAPACITOR	220uF 6.3V M
C244	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C281	QFVF1HJ-474Z	MF CAPACITOR	0.47uF 50V J
C282	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C283	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C284	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C285	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C286	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C287	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C288	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C302	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C352	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C354	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C360	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C391	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C392	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C422	QFN32AK-102Z	M CAPACITOR	1000pF 100V K
C424	QETN1VM-107Z	E CAPACITOR	100uF 35V M
C425	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C427	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C428	QETM1EM-228	E CAPACITOR	2200uF 25V M
C431	QFLC2AK-563Z	M CAPACITOR	0.056uF 100V K
C433	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C435	NCB21HK-183X	C CAPACITOR	0.018uF 50V K
C440	QCS32HJ-100Z	C CAPACITOR	10pF 500V J
C501	QCB32HK-151Z	C CAPACITOR	150pF 500V K
C502	QCB32HK-331Z	C CAPACITOR	330pF 500V K
C503	QEHR2CM-105Z	E CAPACITOR	1uF 160V M
C504	QEZO203-107	E CAPACITOR	100uF 160V M
C507	QEZO195-475Z	BP E CAPACITOR	4.7uF 50V M
△C510	QFZO200-422	MPP CAPACITOR	4200pF 1.5kV H
△C513	QFZO198-133	MPP CAPACITOR	0.013uF 1.5kV H
C514	QFP32GJ-183	PP CAPACITOR	0.018uF 400V J

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C515	QFZ0197-474	MPP CAPACITOR	0.47uF 250V J	△C999	QCZ9074-103	C CAPACITOR	0.01uF AC250V M
C516	QCB32HK-561Z	C CAPACITOR	560pF 500V K	R003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C521	QETN2EM-106Z	E CAPACITOR	10uF 250V M	R004	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C523	QEHR1VM-108Z	E CAPACITOR	1000uF 35V M	R005	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C525	QETN1VM-107Z	E CAPACITOR	100uF 35V M	R006	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C526	QFV21HJ-824Z	MF CAPACITOR	0.82uF 50V J	R008	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
C527	QFLC2AJ-103Z	M CAPACITOR	0.01uF 100V J	R009	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C533	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R101	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C601	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	R102	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C602	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R103	QRE121J-101Y	C RESISTOR	100Ω 1/2W J
C603	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R104	NRSA63J-180X	MG RESISTOR	18Ω 1/16W J
C604	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R105	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J
C621	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R111	NRSA63J-394X	MG RESISTOR	390kΩ 1/16W J
C622	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R112	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J
C624	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	R113	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C626	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	R115	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C627	NCF21CZ-105X	C CAPACITOR	1uF 16V Z	R116	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J
C628	QETN1HM-226Z	E CAPACITOR	22uF 50V M	R117	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J
C629	NCF21CZ-105X	C CAPACITOR	1uF 16V Z	R120	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J
C630	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R121	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
C632	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R131	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C633	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R132	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C634	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R133	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J
C635	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R134	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C637	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R135	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C638	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R161	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C651	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	R163	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C652	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	R164	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C655	NCB31HK-332X	C CAPACITOR	3300pF 50V K	R165	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C656	NCB31HK-332X	C CAPACITOR	3300pF 50V K	R166	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C657	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	R167	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C658	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	R168	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C659	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R169	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J
C660	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R171	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C661	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R201	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C662	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R212	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C700	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R215	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C701	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R216	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C702	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R217	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C703	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R227	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C704	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R231	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C705	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R237	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
C708	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R238	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
C709	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R241	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C711	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R243	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C712	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R281	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C728	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R282	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
C807	QETN1AM-477Z	E CAPACITOR	470uF 10V M	R283	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
C815	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R286	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C851	QETN1EM-107Z	E CAPACITOR	100uF 25V M	R287	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C852	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R288	NRSA63J-471X	MG RESISTOR	470Ω 1/10W J
C853	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R289	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J
C854	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R290	NRSA02J-561X	MG RESISTOR	560Ω 1/10W J
C856	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R292	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J
C857	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	R293	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
△C901	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R296	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C902	QFZ9072-473	MM CAPACITOR	0.047uF AC250V K	R297	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C903	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R298	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C904	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R301	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
△C905	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R302	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
△C906	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R303	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C907	QEZO644-567	E CAPACITOR	560uF 200V K	R304	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C908	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R305	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C912	QOC3040-222	C CAPACITOR	2200pF 2kV K	R306	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C913	QFLC1HJ-471Z	M CAPACITOR	470pF 50V J	R318	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C914	QETN1HM-107Z	E CAPACITOR	100uF 50V M	R319	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C916	NDC31HJ-331X	C CAPACITOR	330pF 50V J	R352	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C917	NCB31HK-182X	C CAPACITOR	1800pF 50V K	R354	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C918	NCB21HK-104X	C CAPACITOR	0.1uF 50V K	R355	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C919	QFP32GJ-103	PP CAPACITOR	0.01uF 400V J	R356	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C931	QEZO203-227	E CAPACITOR	220uF 160V M	R358	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C932	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R359	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C933	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R421	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J
C934	NDC31HJ-221X	C CAPACITOR	220pF 50V J	R423	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
C935	QETN1VM-108Z	E CAPACITOR	1000uF 35V M	R424	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
C937	QCZ0340-102	C CAPACITOR	1000pF 2kV K	R426	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
C938	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R427	QRT029J-1R2	MF RESISTOR	1.2Ω 2W J
C939	QCB32HK-152Z	C CAPACITOR	1500pF 500V K	R428	QRE121J-120Y	C RESISTOR	12Ω 1/2W J
C941	QCB32HK-102Z	C CAPACITOR	1000pF 500V K	R429	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C942	QEHR1HM-105Z	E CAPACITOR	1uF 50V M	R431	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C943	QETN1CM-108Z	E CAPACITOR	1000uF 16V M	R432	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C951	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R433	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
C952	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R434	QRL029J-221	OMF RESISTOR	220Ω 2W J
C971	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R435	QRE121J-102Y	C RESISTOR	1kΩ 1/16W J
C972	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R441	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
△C997	QCZ9079-102	C CAPACITOR	1000pF AC250V M	R501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
△C998	QCZ9074-103	C CAPACITOR	0.01uF AC250V M				

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R502	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	R918	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R503	QRE121J-103Y	C RESISTOR	10kΩ 1/2W J	R919	QRE121J-684Y	C RESISTOR	680kΩ 1/2W J
R504	QRL039J-152	OMF RESISTOR	1.5kΩ 3W J	R924	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R505	QRL039J-152	OMF RESISTOR	1.5kΩ 3W J	R930	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R511	QRE121J-220Y	C RESISTOR	22Ω 1/2W J	R940	QRE121J-181Y	C RESISTOR	180Ω 1/2W J
R512	QRE121J-681Y	C RESISTOR	680Ω 1/2W J	R941	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R516	QRZ0221-2R0	OMF RESISTOR	2Ω 7W K	R950	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R524	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R951	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R526	QRE121J-272Y	C RESISTOR	2.7kΩ 1/2W J	R952	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R527	QRE121J-154Y	C RESISTOR	15kΩ 1/2W J	R953	QRE121J-820Y	C RESISTOR	82Ω 1/2W J
R528	QRE121J-154Y	C RESISTOR	150kΩ 1/2W J	R972	NRVA02D-102X	CMF RESISTOR	1kΩ 1/10W D
R529	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R973	NRVA02D-332X	CMF RESISTOR	3.3kΩ 1/10W D
△R531	QRZ0230-391X	UNF C RESISTOR	390Ω	R975	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R532	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	R977	QRE121J-473Y	C RESISTOR	47kΩ 1/2W J
R533	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R978	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R534	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	△R998	QRZ9041-275	C RESISTOR	2.7MΩ 1/2W K
△R535	NRVA02D-242X	CMF RESISTOR	2.4kΩ 1/10W D	R999	QRE121J-121Y	C RESISTOR	120Ω 1/2W J
R536	QRE121J-470Y	C RESISTOR	47Ω 1/2W J				
△R537	NRVA02D-752X	CMF RESISTOR	7.5kΩ 1/10W D	L001	QQL244K-560Z	PEAKING COIL	56uH K
R538	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	L101	QQLZ014-R39	COIL	0.39uH 100mA L
R543	QRE121J-122Y	C RESISTOR	1.2kΩ 1/2W J	L131	QQL29BJ-220Z	P COIL	0.65Ω 22uH J
R544	QRE121J-392Y	C RESISTOR	3.9kΩ 1/2W J	L161	QQL29BJ-220Z	P COIL	0.65Ω 22uH J
R545	QRE121J-822Y	C RESISTOR	8.2kΩ 1/2W J	L232	QQL244K-560Z	PEAKING COIL	56uH K
R546	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	L241	QQL244K-220Z	PEAKING COIL	22uH K
R547	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	L391	QQL244K-220Z	PEAKING COIL	22uH K
R548	QRE121J-152Y	C RESISTOR	1.5kΩ 1/2W J	L511	QQR1027-005	LINEARITY COIL	
R553	QRL039J-330	OMF RESISTOR	33Ω 3W J	L512	QQLZ036-821	COIL	820uH K
△R554	QRK126J-220X	UNF C RESISTOR	22Ω 1/2W J	L521	QQLZ026-121	COIL	120uH A)7%
R555	QRT029J-2R2	MF RESISTOR	2.2Ω 2W J	L701	QQL244K-220Z	PEAKING COIL	22uH K
R601	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	L702	QQL244K-220Z	PEAKING COIL	22uH K
R602	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	L703	QQL244K-220Z	PEAKING COIL	22uH K
R603	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	L704	QQL244K-220Z	PEAKING COIL	22uH K
R621	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	L705	QQL244K-220Z	PEAKING COIL	22uH K
R623	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L931	QQL26AK-470Z	CHOKE COIL	47uH K
R624	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	L933	QQL26AK-470Z	CHOKE COIL	47uH K
R626	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L937	QQL26AK-470Z	CHOKE COIL	47uH K
R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L940	QQR0582-001Z	FERRITE BEADS	
R628	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T111	QQR0907-001	I F T	
R630	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	T501	QQR1414-001	DRIVE TRANSF	
R631	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	△T921	QQS0152-001	SW TRANSF	
R649	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	△T951	QQT0355-001	POWER TRANSF	
R651	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J				
R652	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	CF001	QAX0349-001	C TRAP	47.25MHz
R653	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	CF131	QAX0639-001Z	C TRAP	4.500MHz
R654	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	CF161	QAX0642-001Z	C FILTER	4.500MHz
R655	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	CN001	QGB1505J1-35	CONNECTOR	B-B (1-35)
R657	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	CN004	QGA2501C5-07Z	CONNECTOR	W-B (1-7)
R659	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN005	QGA2501C5-06Z	CONNECTOR	W-B (1-6)
R680	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	CN007	QGA2501C5-06Z	CONNECTOR	W-B (1-6)
R700	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	CN00C	QGA2501F1-06	CONNECTOR	W-B (1-6)
R701	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN0E1	CE41507-001P	LV CONNECTOR	
R702	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	CN0E3	CE41507-001P	LV CONNECTOR	
R704	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	CN0HV	QGZ5004C1-06	CONNECTOR	(1-6)
R705	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	CN0S1	QGA2501C5-05Z	CONNECTOR	W-B (1-5)
R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	CN0SS	QGA2501C5-04Z	CONNECTOR	W-B (1-4)
R707	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	△CP932	ICP-N70-T	IC PROTECTOR	2.5A
R708	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	△CP933	ICP-N70-T	IC PROTECTOR	2.5A
R709	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	△CP936	ICP-N70-T	IC PROTECTOR	2.5A
R718	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	△F901	QMF51N1-5R0-J5	FUSE	5A AC125V
R721	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	△F905	QMFZ049-5R0Z-E	FUSE	5A 125V
R729	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	△FR525	QRZ9017-4R7	FUSI RESISTOR	4.7Ω 1/4W J
R731	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	HS001	LC32600-001A	HEAT SINK	
R732	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	HS002	LC31678-001A	HEAT SINK/AL-F	
R733	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	HS003	LC32111-002A	HEAT SINK/AL-F	
R734	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	HS004	CEHE015-001WU	HEAT SINK	
R739	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	HS005	CM42862-00G-H	HEAT SINK ASSY	
R740	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	HS007	CEHT11B-002QS	HEAT SINK	
R764	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	J601	QNN0349-002	PIN JACK	COMP IN
R765	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	K101	QQR0582-001Z	FERRITE BEADS	
R766	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	K401	QQR0621-002Z	FERRITE BEADS	
R767	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	K912	QQR0582-001Z	FERRITE BEADS	
R769	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	K916	QQR0582-001Z	FERRITE BEADS	
R772	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	K917	QQR0582-001Z	FERRITE BEADS	
R811	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	K918	QQR0582-001Z	FERRITE BEADS	
R816	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	K920	QQR1139-001	FERRITE BEADS	
R821	NRSA63J-184X	MG RESISTOR	180kΩ 1/16W J	K931	QQR0582-001Z	FERRITE BEADS	
R827	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	K932	QQR0582-001Z	FERRITE BEADS	
R839	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J	K933	QQR0582-001Z	FERRITE BEADS	
R857	QRL029J-820	OMF RESISTOR	82Ω 2W J	K935	QQR0582-001Z	FERRITE BEADS	
R901	QRF074K-1R2	UNF WW RESISTOR	1.2Ω 7W K	K937	QQR0582-001Z	FERRITE BEADS	
R909	QRG01GJ-470	OMF RESISTOR	47Ω 1W J	LC601	QQR1459-001	EMI F. COIL	
R911	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J	LC602	QQR1459-001	EMI F. COIL	
R912	QRT029J-R18	MF RESISTOR	0.18Ω 2W J	LC603	QQR1459-001	EMI F. COIL	
R913	QRT029J-R15	MF RESISTOR	0.15Ω 2W J	△LF901	QQR1159-001	LINE FILTER	
△R914	QRK126J-681X	UNF C RESISTOR	680Ω 1/2W J	△LF902	QQR0527-004	LINE FILTER	
△R915	QRK129J-6R8	UNF C RESISTOR	6.8Ω 1/2W J	△PC921	PC123Y22	PHOTO COUPLER	
△R917	QRK126J-332X	UNF C RESISTOR	3.3kΩ 1/2W J	△RY951	QSK0085-001	RELAY	

△Ref No.	Part No.	Part Name	Description Local
S421	QSL4A13-C02	LEVER SWITCH	V.CENTER
SF101	QAX0723-001	SAW FILTER	
△TH901	QAD0132-3R0	W-PIC	3Ω
△TU001	QAU0305-001	TUNER	
△VA901	ERZV10V621CS	ZNR	
X701	QAX0767-001Z	CRYSTAL	8.000000MHz

CRT SOCKET P.W. BOARD ASS'Y (SGJ-3515A-M2)

△Ref No.	Part No.	Part Name	Description Local
Q3103	2SC3928A/QR/-X	TRANSISTOR	
Q3107	2SA2005/DE/	POW TRANSISTOR	
Q3108	2SC5511/DE/	POW TRANSISTOR	
Q3109	2SC3928A/QR/-X	TRANSISTOR	
Q3351	2SA1530A/QR/-X	SI TRANSISTOR	
D3105	RH1S-T3	SI DIODE	
D3106	RH1S-T3	SI DIODE	
D3311	MTZJ3.6B-T2	Z DIODE	
D3312	1SS133-T2	DIODE	
D3313	MTZJ3.6B-T2	Z DIODE	
D3314	1SS133-T2	DIODE	
D3331	1SS133-T2	DIODE	
D3351	1SS133-T2	DIODE	
D3352	1SS133-T2	DIODE	
D3353	1SS133-T2	DIODE	
D3354	1SS133-T2	DIODE	
C3101	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C3109	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C3111	NDC31HJ-221X	C CAPACITOR	220pF 50V J
C3113	QETN2CM-106Z	E CAPACITOR	10uF 160V M
C3114	QCB32HK-472Z	C CAPACITOR	4700pF 500V K
C3115	QCB32HK-472Z	C CAPACITOR	4700pF 500V K
C3117	QETN2CM-106Z	E CAPACITOR	10uF 160V M
C3118	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M
C3119	QETN1AM-107Z	E CAPACITOR	100uF 10V M
C3120	QETN1AM-337Z	E CAPACITOR	330uF 10V M
C3121	QCS32HJ-151Z	C CAPACITOR	150pF 500V J
C3127	NDC31HJ-471X	C CAPACITOR	470pF 50V J
C3301	NDC31HJ-561X	C CAPACITOR	560pF 50V J
C3302	NDC31HJ-391X	C CAPACITOR	390pF 50V J
C3303	NDC31HJ-561X	C CAPACITOR	560pF 50V J
C3323	QETN1CM-477Z	E CAPACITOR	470uF 16V M
C3331	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3332	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3333	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3351	QETN1CM-227Z	E CAPACITOR	220uF 16V M
C3363	QCZ0324-102	C CAPACITOR	1000pF 3kV P
R3115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3116	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3123	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3124	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
R3125	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3126	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R3127	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R3128	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3129	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3130	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
R3131	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R3132	QRL029J-391	OMF RESISTOR	390Ω 2W J
R3134	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3136	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
R3139	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R3142	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R3143	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3144	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3145	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3146	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3148	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3301	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3302	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3303	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3304	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3305	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3306	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3307	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3308	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3309	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3310	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3311	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3312	QRL029J-183	OMF RESISTOR	18kΩ 2W J

△Ref No.	Part No.	Part Name	Description Local
R3313	QRL029J-223	OMF RESISTOR	22kΩ 2W J
R3314	QRL029J-223	OMF RESISTOR	22kΩ 2W J
R3315	QRL029J-223	OMF RESISTOR	22kΩ 2W J
R3325	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3326	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3327	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3331	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R3332	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R3333	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R3334	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R3335	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J
R3351	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3354	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J
R3355	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J

L3304	QQL244K-470Z	PEAKING COIL	47uH K
-------	--------------	--------------	--------

CN3004	QJB003-074022	SIN ID C-B WIRE	
CN3005	WJA0029-002A	E-SI ID WIRE	
CN300V	QGA2501C5-03Z	CONNECTOR	W-B (1-3)
CN30E2	QUB130-46A6AS	SIN TWIST WIRE	
CN30E4	QUB130-46A6AS	SIN TWIST WIRE	
K3104	QQR1114-001Z	FERRITE BEADS	
K3105	QQR1114-001Z	FERRITE BEADS	
△SK3001	QNZ0536-001	CRT SOCKET	

AV SELECTOR P.W. BOARD ASS'Y (SGJ-5506A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC5001	CXA2205Q-X	IC	
IC5201	TC90A49AP	IC	
IC5501	TA1218AN	IC	
Q5001	2SA1530A/QR/-X	SI TRANSISTOR	
Q5002	2SA1530A/QR/-X	SI TRANSISTOR	
Q5211	2SC3928A/QR/-X	TRANSISTOR	
Q5212	2SC3928A/QR/-X	TRANSISTOR	
Q5251	2SC3928A/QR/-X	TRANSISTOR	
Q5252	2SA1530A/QR/-X	SI TRANSISTOR	
Q5253	2SA1530A/QR/-X	SI TRANSISTOR	
Q5261	2SA1530A/QR/-X	SI TRANSISTOR	
Q5262	2SC3928A/QR/-X	TRANSISTOR	
Q5263	2SA1530A/QR/-X	SI TRANSISTOR	
Q5384	DTC323TK-X	DIGI TRANSISTOR	
Q5385	DTC323TK-X	DIGI TRANSISTOR	
Q5386	DTC323TK-X	DIGI TRANSISTOR	
Q5387	DTC323TK-X	DIGI TRANSISTOR	
Q5501	2SA1530A/QR/-X	SI TRANSISTOR	
D5391	MTZJ9.1C-T2	Z DIODE	
D5392	MTZJ9.1C-T2	Z DIODE	
D5501	MTZJ9.1C-T2	Z DIODE	
D5502	MTZJ9.1C-T2	Z DIODE	
D5503	MTZJ9.1C-T2	Z DIODE	
D5504	MTZJ9.1C-T2	Z DIODE	
D5505	MTZJ9.1C-T2	Z DIODE	
D5507	MTZJ9.1C-T2	Z DIODE	
D5508	MTZJ9.1C-T2	Z DIODE	
D5509	MTZJ9.1C-T2	Z DIODE	
D5510	MTZJ9.1C-T2	Z DIODE	
D5511	MTZJ9.1C-T2	Z DIODE	
D5512	MTZJ9.1C-T2	Z DIODE	
D5513	MTZJ9.1C-T2	Z DIODE	
C5001	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5002	NCB31HK-562X	C CAPACITOR	5600pF 50V K
C5003	NCB31HK-123X	C CAPACITOR	0.012uF 50V K
C5004	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C5005	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C5006	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5007	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C5008	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C5009	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5010	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C5011	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5012	NCB31HK-272X	C CAPACITOR	2700pF 50V K
C5013	NCB31HK-473X	C CAPACITOR	0.047uF 50V K
C5014	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5015	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5016	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C5017	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5018	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5019	NCB31HK-223X	C CAPACITOR	0.022uF 50V K

△Ref No.	Part No.	Part Name	Description Local
C5020	NCB31HK-472X	C CAPACITOR	4700pF 50V K
C5021	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5022	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C5023	NCB31HK-472X	C CAPACITOR	4700pF 50V K
C5024	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C5025	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C5026	QETN1HM-335Z	E CAPACITOR	3.3uF 50V M
C5027	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5028	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5029	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5030	QETN1CM-227Z	E CAPACITOR	220uF 16V M
C5031	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5203	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C5204	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5205	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C5206	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5211	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M
C5212	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C5213	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C5214	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C5215	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C5226	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5231	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C5232	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5233	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5234	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5235	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5236	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C5237	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5238	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C5239	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5240	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5241	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5242	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C5243	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5246	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C5247	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5251	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C5252	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5253	NDC31HJ-820X	C CAPACITOR	82pF 50V J
C5255	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C5263	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C5380	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5391	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C5392	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C5501	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C5502	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C5503	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5504	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5508	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C5509	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5520	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C5521	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C5531	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5532	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C5533	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C5534	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M
R5001	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
R5002	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R5003	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5004	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R5005	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J
R5007	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R5008	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R5009	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R5010	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
R5011	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5012	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5013	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5014	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5015	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5016	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5017	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
R5031	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5032	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5033	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
R5034	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
R5210	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R5211	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R5212	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5213	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R5214	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R5215	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R5216	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R5217	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R5240	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J

△Ref No.	Part No.	Part Name	Description Local
R5241	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J
R5242	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5243	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5251	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R5253	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R5254	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R5255	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
R5258	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5259	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R5261	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5262	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R5263	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R5265	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R5269	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
R5270	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R5384	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R5385	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R5386	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R5387	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R5391	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R5392	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R5393	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
R5394	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
R5395	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R5396	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R5501	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5502	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5503	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5504	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5505	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5507	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5508	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J
R5509	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5510	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5511	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5512	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5513	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J
R5514	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5515	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5516	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5517	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5519	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R5520	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R5521	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R5522	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R5523	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R5524	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5526	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5532	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R5533	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R5541	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5542	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5543	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5544	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5545	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R5546	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R5558	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R5559	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R5560	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R5561	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
L5202	QQL244K-150Z	PEAKING COIL	15uH K
L5211	QQL244K-4R7Z	PEAKING COIL	4.7uH K
L5241	QQL244K-4R7Z	PEAKING COIL	4.7uH K
L5243	QQL244K-4R7Z	PEAKING COIL	4.7uH K
L5244	QQL244K-4R7Z	PEAKING COIL	4.7uH K
L5261	QQL244K-150Z	PEAKING COIL	15uH K
CN5001	QGB1505K1-35	CONNECTOR	B-B (1-35)
CN5006	QGA2501C5-05Z	CONNECTOR	W-B (1-5)
J5501	QNZ0454-001	AV JACK	S/V/L/R IN
J5502	QNN0348-001	PIN JACK	V/L/R IN
J5503	QNN0348-001	PIN JACK	L/R OUT

FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6506A-M2)

△Ref No.	Part No.	Part Name	Description Local
C6401	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C6402	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C6403	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M

△Ref No.	Part No.	Part Name	Description	Local
R6401	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R6402	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R6403	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R6702	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6703	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6704	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R6705	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R6706	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
CN6006	QJB003-054610	SIN ID C-B WIRE		
CN6007	QJB003-064426	SIN ID C-B WIRE		
CN600B	QJB003-050806	SIN ID C-B WIRE		
J6401	QNN0281-003	PIN JACK		V IN
J6402	QNN0281-002	PIN JACK		L IN
J6403	QNN0282-001	PIN JACK		R IN
LC6401	QQR1459-001	EMI F. COIL		
LC6402	QQR1459-001	EMI F. COIL		
LC6403	QQR1459-001	EMI F. COIL		
S6702	QSW0619-003Z	TACT SWITCH		MENU
S6703	QSW0619-003Z	TACT SWITCH		CH-
S6704	QSW0619-003Z	TACT SWITCH		CH+
S6705	QSW0619-003Z	TACT SWITCH		VOL-
S6706	QSW0619-003Z	TACT SWITCH		VOL+

LED & POWER SW P.W. BOARD ASS'Y (SGJ-7506A-M2)

△Ref No.	Part No.	Part Name	Description	Local
IC7701	GP1UM281QK	IR DETECT UNIT	38kHz	
Q7702	UN2112-X	TRANSISTOR		
D7701	LG22440	LED	POWER	
C7701	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
R7708	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R7709	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	
R7710	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7711	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
CN700B	QGA2501C5-05Z	CONNECTOR		W-B (1-5)
S7701	QSW0847-001	TACT SWITCH		POWER

PRINTED WIRING BOARD PARTS LIST [AV-32F475/z]

MAIN P.W. BOARD ASS'Y (SGJ-1554A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC101	M52342FP-X	IC	(SERVICE)
IC201	TM8812CSDNG5DB9	IC(MCU)	
IC421	LA78041	IC	
IC621	TFA9843J/N1	IC	
IC651	NJM2150AD	IC	
IC702	AT24C08-27F485	IC	
IC703	S-80840CNY-T	IC	
IC704	AN78L05-T	IC	
IC851	L7812CP	IC	
IC852	L7809CP	IC	
IC853	L7805CP	IC	
△IC911	STR-G9626-F3	IC	
△IC921	SE135N	IC	
Q001	UN2212-X	TRANSISTOR	H.OUT
Q101	2SC5083/L-P/-T	TRANSISTOR	
Q131	2SA1530A/QR/-X	SI TRANSISTOR	
Q161	2SC3928A/QR/-X	TRANSISTOR	
Q211	2SC3928A/QR/-X	TRANSISTOR	
Q232	2SC3928A/QR/-X	TRANSISTOR	
Q233	2SC3928A/QR/-X	TRANSISTOR	
Q352	2SC3928A/QR/-X	TRANSISTOR	
Q353	2SC3928A/QR/-X	TRANSISTOR	
Q501	2SC4212/Z1/	TRANSISTOR	
△Q511	2SD2645-YD	TRANSISTOR	
△Q531	2SC2785/JH/-T	SI TRANSISTOR	
Q532	2SA1530A/QR/-X	SI TRANSISTOR	
Q541	2SA1530A/QR/-X	SI TRANSISTOR	
Q542	2SA1530A/QR/-X	SI TRANSISTOR	
Q543	2SD1267A/QP/	POW TRANSISTOR	
Q621	2SD601A/QR/-X	TRANSISTOR	
Q622	2SD601A/QR/-X	TRANSISTOR	
Q623	2SA1530A/QR/-X	SI TRANSISTOR	
Q625	2SD601A/QR/-X	TRANSISTOR	
Q701	2SA1530A/QR/-X	SI TRANSISTOR	
Q951	2SD1383K/AB/-X	SI TRANSISTOR	
Q971	2SA1208/ST/Z1-T	TRANSISTOR	
D305	1SS133-T2	DIODE	
D306	1SS133-T2	DIODE	
D307	1SS133-T2	DIODE	
D308	1SS133-T2	DIODE	
D309	1SS133-T2	DIODE	
D310	1SS133-T2	DIODE	
D352	MTZJ9.1C-T2	Z DIODE	
D353	1SS133-T2	DIODE	
D354	MTZJ3.3A-T2	Z DIODE	
D421	1N4003-T2	SI DIODE	
D422	MTZJ75-T2	Z DIODE	
D501	RH3G-F1	SI DIODE	
D502	RU3AM-LFC4	SI DIODE	
D521	RH1S-T3	SI DIODE	
D523	RGF10J-04TS-T3	SI DIODE	
D525	1SS81-T5	SI DIODE	
D526	1SS81-T5	SI DIODE	
D527	1SR124-400A-T2	SI DIODE	
D529	MTZJ9.1C-T2	Z DIODE	
△D531	MA4068N/Z1/-T2	Z DIODE	
D535	1SS133-T2	DIODE	
D601	MTZJ9.1C-T2	Z DIODE	
D602	MTZJ9.1C-T2	Z DIODE	
D603	MTZJ9.1C-T2	Z DIODE	
D621	1SS133-T2	DIODE	
D623	1SS133-T2	DIODE	
D626	1SS133-T2	DIODE	
D703	MTZJ5.6B-T2	Z DIODE	
D704	MTZJ5.6B-T2	Z DIODE	
D705	1SS133-T2	DIODE	
D706	MTZJ5.6B-T2	Z DIODE	
D707	MTZJ5.6B-T2	Z DIODE	
D708	MTZJ5.6B-T2	Z DIODE	
D709	MTZJ5.6B-T2	Z DIODE	
D723	MTZJ5.6B-T2	Z DIODE	
△D901	GSIB460	BRIDGE DIODE	
D910	MA700A-T2	SB DIODE	
D911	RGF10J-04TS-T3	SI DIODE	
D912	RGF10J-04TS-T3	SI DIODE	
D913	1SS133-T2	DIODE	
D914	1SS133-T2	DIODE	
D915	SARS01-T2	SI DIODE	
D917	MTZJ30A-T2	Z DIODE	
D918	MTZJ5.1C-T2	Z DIODE	

△Ref No.	Part No.	Part Name	Description Local
D920	1SS133-T2	DIODE	
D931	RU4AM-LFT2	SI DIODE	
D933	RU3YX-LFC4	SI DIODE	
D935	RU3YX-LFC4	SI DIODE	
D937	RU3YX-LFC4	SI DIODE	
D941	MTZJ33A-T2	Z DIODE	
D945	MTZJ9.1B-T2	Z DIODE	
D952	1SS133-T2	DIODE	
D953	1SS133-T2	DIODE	
D954	1N4002G-T2	FR DIODE	
D955	1N4002G-T2	FR DIODE	
D956	1N4002G-T2	FR DIODE	
D957	1N4002G-T2	FR DIODE	
D972	MTZJ15C-T2	Z DIODE	
D973	1SS133-T2	DIODE	
C001	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C003	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C004	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M
C005	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C101	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C104	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C105	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C106	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C107	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C113	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C114	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C116	NCB31CK-224X	C CAPACITOR	0.22uF 16V K
C119	NDC31HJ-681X	C CAPACITOR	680pF 50V J
C120	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C124	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C131	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C161	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C162	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C163	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C164	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C165	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C166	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C167	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C202	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C203	NCB31HK-152X	C CAPACITOR	1500pF 50V K
C211	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M
C212	NDC31HJ-100X	C CAPACITOR	10pF 50V J
C221	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C222	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
C223	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C233	NDC31HJ-680X	C CAPACITOR	68pF 50V J
C237	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C241	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C242	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C243	QETN0JM-227Z	E CAPACITOR	220uF 6.3V M
C244	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C281	QFVF1HJ-474Z	MF CAPACITOR	0.47uF 50V J
C282	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C283	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C284	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C285	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C286	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C287	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C288	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C302	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C352	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C354	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C360	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C391	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C392	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C422	QFN32AK-102Z	M CAPACITOR	1000pF 100V K
C424	QETN1VM-107Z	E CAPACITOR	100uF 35V M
C425	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C427	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C428	QETM1EM-228	E CAPACITOR	2200uF 25V M
C431	QFLC2AK-563Z	M CAPACITOR	0.056uF 100V K
C433	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C435	NCB21HK-183X	C CAPACITOR	0.018uF 50V K
C440	QCS32HJ-100Z	C CAPACITOR	10pF 500V J
C501	QCB32HK-151Z	C CAPACITOR	150pF 500V K
C502	QCB32HK-331Z	C CAPACITOR	330pF 500V K
C503	QEHR2CM-105Z	E CAPACITOR	1uF 160V M
C504	QEZ0203-107	E CAPACITOR	100uF 160V M
C507	QEZ0195-475Z	BP E CAPACITOR	4.7uF 50V M
△C510	QFZ0200-422	MPP CAPACITOR	4200pF 1.5kV H
△C513	QFZ0200-822	MPP CAPACITOR	8200pF 1.5kV H
C514	QFP32GJ-273	PP CAPACITOR	0.027uF 400V J

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C515	QFZ0197-304	MPP CAPACITOR	0.3uF 250V J	△C999	QCZ9074-103	C CAPACITOR	0.01uF AC250V M
C516	QCB32HK-561Z	C CAPACITOR	560pF 500V K	R003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C521	QETN2EM-106Z	E CAPACITOR	10uF 250V M	R004	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C523	QEHR1VM-108Z	E CAPACITOR	1000uF 35V M	R005	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C525	QETN1VM-107Z	E CAPACITOR	100uF 35V M	R006	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C526	QFV21HJ-824Z	MF CAPACITOR	0.82uF 50V J	R008	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
C527	QFLC2AJ-103Z	M CAPACITOR	0.01uF 100V J	R009	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C533	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R101	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C601	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	R102	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R103	QRE121J-101Y	C RESISTOR	100Ω 1/2W J
C603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R104	NRSA63J-180X	MG RESISTOR	18Ω 1/16W J
C604	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R105	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J
C621	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R111	NRSA63J-394X	MG RESISTOR	390kΩ 1/16W J
C622	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R112	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J
C624	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	R113	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C626	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	R115	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C627	NCF21CZ-105X	C CAPACITOR	1uF 16V Z	R116	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J
C628	QETN1HM-226Z	E CAPACITOR	22uF 50V M	R117	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J
C629	NCF21CZ-105X	C CAPACITOR	1uF 16V Z	R120	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J
C630	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R121	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
C632	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R131	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C633	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R132	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C634	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R133	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J
C635	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R134	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C637	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R135	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C638	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R161	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C651	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	R163	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C652	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	R164	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C655	NCB31HK-332X	C CAPACITOR	3300pF 50V K	R165	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C656	NCB31HK-332X	C CAPACITOR	3300pF 50V K	R166	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C657	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	R167	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C658	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	R168	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C659	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R169	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J
C660	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R171	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C661	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R201	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C662	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R212	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C700	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R215	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C701	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R216	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C702	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R217	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C703	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R227	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C704	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R231	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C705	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R237	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
C708	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R238	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
C709	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R241	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C711	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R243	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C712	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R281	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C728	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R282	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
C807	QETN1AM-477Z	E CAPACITOR	470uF 10V M	R283	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
C815	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R286	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C851	QETN1EM-107Z	E CAPACITOR	100uF 25V M	R287	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C852	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R288	NRSA02J-471X	MG RESISTOR	470Ω 1/10W J
C853	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R289	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J
C854	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R290	NRSA02J-561X	MG RESISTOR	560Ω 1/10W J
C856	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R292	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J
C857	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	R293	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
△C901	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R296	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C902	QFZ9072-473	MM CAPACITOR	0.047uF AC250V K	R297	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C903	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R298	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C904	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R301	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
△C905	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R302	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
△C906	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R303	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C907	QEZO644-567	E CAPACITOR	560uF 200V K	R304	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C908	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R305	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C912	QOC3040-222	C CAPACITOR	2200pF 2kV K	R306	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C913	QFLC1HJ-471Z	M CAPACITOR	470pF 50V J	R318	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C914	QETN1HM-107Z	E CAPACITOR	100uF 50V M	R319	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C916	NDC31HJ-331X	C CAPACITOR	330pF 50V J	R352	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C917	NCB31HK-182X	C CAPACITOR	1800pF 50V K	R354	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C918	NCB21HK-104X	C CAPACITOR	0.1uF 50V K	R355	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C919	QFP32GJ-103	PP CAPACITOR	0.01uF 400V J	R356	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C931	QEZO203-227	E CAPACITOR	220uF 160V M	R358	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C932	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R359	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C933	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R421	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J
C934	NDC31HJ-221X	C CAPACITOR	220pF 50V J	R423	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
C935	QETN1VM-108Z	E CAPACITOR	1000uF 35V M	R424	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
C937	QCZ0340-102	C CAPACITOR	1000pF 2kV K	R426	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
C938	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R427	QRT029J-1R2	MF RESISTOR	1.2Ω 2W J
C939	QCB32HK-152Z	C CAPACITOR	1500pF 500V K	R428	QRE121J-120Y	C RESISTOR	12Ω 1/2W J
C941	QCB32HK-102Z	C CAPACITOR	1000pF 500V K	R429	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C942	QEHR1HM-105Z	E CAPACITOR	1uF 50V M	R431	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C943	QETN1CM-108Z	E CAPACITOR	1000uF 16V M	R432	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C951	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R433	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
C952	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R434	QRL029J-221	OMF RESISTOR	220Ω 2W J
C971	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R435	QRE121J-821Y	C RESISTOR	820Ω 1/16W J
C972	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R441	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
△C997	QCZ9079-102	C CAPACITOR	1000pF AC250V M	R501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
△C998	QCZ9074-103	C CAPACITOR	0.01uF AC250V M				

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R502	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	R918	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R503	QRE121J-103Y	C RESISTOR	10kΩ 1/2W J	R919	QRE121J-684Y	C RESISTOR	680kΩ 1/2W J
R504	QRL039J-152	OMF RESISTOR	1.5kΩ 3W J	R924	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R505	QRL039J-152	OMF RESISTOR	1.5kΩ 3W J	R930	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R511	QRE121J-220Y	C RESISTOR	22Ω 1/2W J	R940	QRE121J-181Y	C RESISTOR	180Ω 1/2W J
R512	QRE121J-681Y	C RESISTOR	680Ω 1/2W J	R941	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R516	QRZ0221-2R0	OMF RESISTOR	2Ω 7W K	R950	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R524	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R951	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R526	QRE121J-272Y	C RESISTOR	2.7kΩ 1/2W J	R952	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R527	QRE121J-154Y	C RESISTOR	150kΩ 1/2W J	R953	QRE121J-820Y	C RESISTOR	82Ω 1/2W J
R528	QRE121J-124Y	C RESISTOR	120kΩ 1/2W J	R972	NRVA02D-102X	CMF RESISTOR	1kΩ 1/10W D
R529	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R973	NRVA02D-332X	CMF RESISTOR	3.3kΩ 1/10W D
△R531	QRZ0230-391X	UNF C RESISTOR	390Ω	R975	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R532	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	R977	QRE121J-473Y	C RESISTOR	47kΩ 1/2W J
R533	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R978	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R534	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	△R998	QRZ9041-275	C RESISTOR	2.7MΩ 1/2W K
△R535	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D	R999	QRE121J-121Y	C RESISTOR	120Ω 1/2W J
R536	QRE121J-470Y	C RESISTOR	47Ω 1/2W J				
△R537	NRVA02D-752X	CMF RESISTOR	7.5kΩ 1/10W D	L001	QQL244K-560Z	PEAKING COIL	56uH K
R538	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	L101	QQLZ014-R39	COIL	0.39uH 100mA L
R543	QRE121J-122Y	C RESISTOR	1.2kΩ 1/2W J	L131	QQL29BJ-220Z	P COIL	0.65Ω 22uH J
R544	QRE121J-392Y	C RESISTOR	3.9kΩ 1/2W J	L161	QQL29BJ-220Z	P COIL	0.65Ω 22uH J
R545	QRE121J-153Y	C RESISTOR	15kΩ 1/2W J	L232	QQL244K-560Z	PEAKING COIL	56uH K
R546	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	L241	QQL244K-220Z	PEAKING COIL	22uH K
R547	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	L391	QQL244K-220Z	PEAKING COIL	22uH K
R548	QRE121J-152Y	C RESISTOR	1.5kΩ 1/2W J	L511	QQR1409-002	LINEARITY COIL	
R553	QRL039J-330	OMF RESISTOR	33Ω 3W J	L512	QQLZ028-501	COIL	500uH
△R554	QRK126J-220X	UNF C RESISTOR	22Ω 1/2W J	L521	QQR1333-001	CHOKE COIL	
R555	QRT029J-2R2	MF RESISTOR	2.2Ω 2W J	L701	QQL244K-220Z	PEAKING COIL	22uH K
R601	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	L702	QQL244K-220Z	PEAKING COIL	22uH K
R602	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	L703	QQL244K-220Z	PEAKING COIL	22uH K
R603	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	L704	QQL244K-220Z	PEAKING COIL	22uH K
R621	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	L705	QQL244K-220Z	PEAKING COIL	22uH K
R623	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L931	QQL26AK-470Z	CHOKE COIL	47uH K
R624	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	L933	QQL26AK-470Z	CHOKE COIL	47uH K
R626	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L937	QQL26AK-470Z	CHOKE COIL	47uH K
R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L940	QQR0582-001Z	FERRITE BEADS	
R628	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T111	QQR0907-001	I F T	
R630	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	T501	QQR1414-001	DRIVE TRANSF	
R631	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	△T921	QQS0152-001	SW TRANSF	
R649	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	△T951	QQT0355-001	POWER TRANSF	
R651	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J				
R652	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	CF001	QAX0349-001	C TRAP	47.25MHz
R653	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	CF131	QAX0639-001Z	C TRAP	4.500MHz
R654	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	CF161	QAX0642-001Z	C FILTER	4.500MHz
R655	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	CN001	QGB1505J1-35	CONNECTOR	B-B (1-35)
R657	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	CN004	QGA2501C5-07Z	CONNECTOR	W-B (1-7)
R659	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN005	QGA2501C5-06Z	CONNECTOR	W-B (1-6)
R680	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	CN007	QGA2501C5-06Z	CONNECTOR	W-B (1-6)
R700	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	CN00C	QGA2501F1-06	CONNECTOR	W-B (1-6)
R701	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN0E1	CE41507-001P	LV CONNECTOR	
R702	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	CN0E3	CE41507-001P	LV CONNECTOR	
R704	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	CN0HV	QGG25004C1-06	CONNECTOR	(1-6)
R705	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	CN0S1	QGA2501C5-05Z	CONNECTOR	W-B (1-5)
R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	CN0SS	QGA2501C5-04Z	CONNECTOR	W-B (1-4)
R707	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	△CP932	ICP-N70-T	IC PROTECTOR	2.5A
R708	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	△CP933	ICP-N70-T	IC PROTECTOR	2.5A
R709	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	△CP936	ICP-N70-T	IC PROTECTOR	2.5A
R718	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	△F901	QMF51N1-5R0-J5	FUSE	5A AC125V
R721	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	△F905	QMFZ049-5R0Z-E	FUSE	5A 125V
R729	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	△FR525	QRZ9017-4R7	FUSI RESISTOR	4.7Ω 1/4W J
R731	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	HS001	LC32600-001A	HEAT SINK	
R732	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	HS002	LC31678-001A	HEAT SINK/AL-F	
R733	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	HS003	LC32111-002A	HEAT SINK/AL-F	
R734	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	HS004	CEHE015-001WU	HEAT SINK	
R739	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	HS005	CM42862-00G-H	HEAT SINK ASSY	
R740	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	HS007	CEHT11B-002QS	HEAT SINK	
R764	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	J601	QNN0349-002	PIN JACK	COMP IN
R765	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	K101	QQR0582-001Z	FERRITE BEADS	
R766	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	K401	QQR0621-002Z	FERRITE BEADS	
R767	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	K912	QQR0582-001Z	FERRITE BEADS	
R769	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	K916	QQR0582-001Z	FERRITE BEADS	
R772	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	K917	QQR0582-001Z	FERRITE BEADS	
R811	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	K918	QQR0582-001Z	FERRITE BEADS	
R816	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	K920	QQR1139-001	FERRITE BEADS	
R821	NRSA63J-184X	MG RESISTOR	180kΩ 1/16W J	K931	QQR0582-001Z	FERRITE BEADS	
R827	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	K932	QQR0582-001Z	FERRITE BEADS	
R839	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J	K933	QQR0582-001Z	FERRITE BEADS	
R857	QRL029J-820	OMF RESISTOR	82Ω 2W J	K935	QQR0582-001Z	FERRITE BEADS	
R901	QRF074K-1R2	UNF WW RESISTOR	1.2Ω 7W K	K937	QQR0582-001Z	FERRITE BEADS	
R909	QRG01GJ-470	OMF RESISTOR	47Ω 1W J	LC601	QQR1459-001	EMI F. COIL	
R911	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J	LC602	QQR1459-001	EMI F. COIL	
R912	QRT029J-R18	MF RESISTOR	0.18Ω 2W J	LC603	QQR1459-001	EMI F. COIL	
R913	QRT029J-R15	MF RESISTOR	0.15Ω 2W J	△LF901	QQR1159-001	LINE FILTER	
△R914	QRK126J-681X	UNF C RESISTOR	680Ω 1/2W J	△LF902	QQR0527-004	LINE FILTER	
△R915	QRK129J-6R8	UNF C RESISTOR	6.8Ω 1/2W J	△PC921	PC123Y22	PHOTO COUPLER	
△R917	QRK126J-332X	UNF C RESISTOR	3.3kΩ 1/2W J	△RY951	QSK0085-001	RELAY	

△Ref No.	Part No.	Part Name	Description Local
S421	QSL4A13-C02	LEVER SWITCH	V.CENTER
SF101	QAX0723-001	SAW FILTER	
△TH901	QAD0132-3R0	W-PIC	3Ω
△TU001	QAU0305-001	TUNER	
△VA901	ERZV10V621CS	ZNR	
X701	QAX0767-001Z	CRYSTAL	8.000000MHz

CRT SOCKET P.W. BOARD ASS'Y (SGJ-3514A-M2)

△Ref No.	Part No.	Part Name	Description Local
Q3103	2SC3928A/QR/-X	TRANSISTOR	
Q3107	2SA2005/DE/	POW TRANSISTOR	
Q3108	2SC5511/DE/	POW TRANSISTOR	
Q3109	2SC3928A/QR/-X	TRANSISTOR	
Q3304	2SC4544-LB	POW TRANSISTOR	
Q3305	2SC4544-LB	POW TRANSISTOR	
Q3306	2SC4544-LB	POW TRANSISTOR	
Q3351	2SA1530A/QR/-X	SI TRANSISTOR	
D3105	RH1S-T3	SI DIODE	
D3106	RH1S-T3	SI DIODE	
D3311	MTZJ3.6B-T2	Z DIODE	
D3312	1SS133-T2	DIODE	
D3313	MTZJ3.6B-T2	Z DIODE	
D3314	1SS133-T2	DIODE	
D3331	1SS133-T2	DIODE	
D3351	1SS133-T2	DIODE	
D3352	1SS133-T2	DIODE	
D3353	1SS133-T2	DIODE	
D3354	1SS133-T2	DIODE	
C3101	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C3109	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C3111	NDC31HJ-221X	C CAPACITOR	220pF 50V J
C3113	QETN2CM-106Z	E CAPACITOR	10uF 160V M
C3114	QCB32HK-472Z	C CAPACITOR	4700pF 500V K
C3115	QCB32HK-472Z	C CAPACITOR	4700pF 500V K
C3117	QETN2CM-106Z	E CAPACITOR	10uF 160V M
C3118	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M
C3119	QETN1AM-107Z	E CAPACITOR	100uF 10V M
C3120	QETN1AM-337Z	E CAPACITOR	330uF 10V M
C3121	QCS32HJ-151Z	C CAPACITOR	150pF 500V J
C3127	NDC31HJ-471X	C CAPACITOR	470pF 50V J
C3301	NDC31HJ-561X	C CAPACITOR	560pF 50V J
C3302	NDC31HJ-391X	C CAPACITOR	390pF 50V J
C3303	NDC31HJ-561X	C CAPACITOR	560pF 50V J
C3323	QETN1CM-477Z	E CAPACITOR	470uF 16V M
C3331	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3332	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3333	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C3351	QETN1CM-227Z	E CAPACITOR	220uF 16V M
C3363	QCZ0324-102	C CAPACITOR	1000pF 3kV P
R3115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3116	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3122	QRT029J-R15	MF RESISTOR	0.15Ω 2W J
R3123	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3124	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
R3125	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3126	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R3127	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R3128	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3129	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3130	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
R3131	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R3132	QRL029J-391	OMF RESISTOR	390Ω 2W J
R3134	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3136	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
R3139	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R3142	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R3143	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R3144	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3145	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3146	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3148	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3301	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3302	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3303	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3304	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3305	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3306	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3307	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3308	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J

△Ref No.	Part No.	Part Name	Description Local
R3309	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3310	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3311	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3312	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R3313	QRL029J-223	OMF RESISTOR	22kΩ 2W J
R3314	QRL029J-223	OMF RESISTOR	22kΩ 2W J
R3315	QRL029J-223	OMF RESISTOR	22kΩ 2W J
R3325	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3326	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3327	QRZ0107-102Z	C RESISTOR	1kΩ 1/2W K
R3331	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R3332	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R3333	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R3334	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R3335	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J
R3351	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
R3354	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J
R3355	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
L3304	QQL244K-470Z	PEAKING COIL	47uH K
CN3004	QJB003-074022	SIN ID C-B WIRE	
CN3005	WJA0029-002A	E-SI ID WIRE	
CN300V	QGA2501C5-03Z	CONNECTOR	W-B (1-3)
CN30E2	QUB130-46A6AS	SIN TWIST WIRE	
CN30E4	QUB130-46A6AS	SIN TWIST WIRE	
K3104	QQR1114-001Z	FERRITE BEADS	
K3105	QQR1114-001Z	FERRITE BEADS	
△SK3001	QNZ0536-001	CRT SOCKET	

AV SELECTOR P.W. BOARD ASS'Y (SGJ-5506A-M2)

REFER TO PARTS LIST IN PAGE 3-9 FOR THIS P.W. BOARD.

FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6506A-M2)

REFER TO PARTS LIST IN PAGE 3-10 FOR THIS P.W. BOARD.

LED & POWER SW P.W. BOARD ASS'Y (SGJ-7506A-M2)

REFER TO PARTS LIST IN PAGE 3-11 FOR THIS P.W. BOARD.

PRINTED WIRING BOARD PARTS LIST [AV-32F485M]

MAIN P.W. BOARD ASS'Y (SGJ-1558A-M2)

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
IC101	M52342FP-X	IC		D915	SARS01-T2	SI DIODE	
IC201	TM8812CSDNG5DB9	IC(MCU)		D917	MTZJ30A-T2	Z DIODE	
IC421	LA78041	IC		D918	MTZJ5.1C-T2	Z DIODE	
IC621	TFA9843J/N1	IC		D920	1SS133-T2	DIODE	
IC641	NJM2701M-X	IC		D931	RU4AM-LFT2	SI DIODE	
IC651	NJM2150AD	IC		D933	RU3YX-LFC4	SI DIODE	
IC702	AT24C08-27F485	IC	(SERVICE)	D935	RU3YX-LFC4	SI DIODE	
IC703	S-80840CNY-T	IC		D937	RU3YX-LFC4	SI DIODE	
IC704	AN78L05-T	IC		D941	MTZJ33A-T2	Z DIODE	
IC851	L7812CP	IC		D945	MTZJ9.1B-T2	Z DIODE	
IC852	L7809CP	IC		D952	1SS133-T2	DIODE	
IC853	L7805CP	IC		D953	1SS133-T2	DIODE	
△IC911	STR-G9626-F3	IC		D954	1N4002G-T2	FR DIODE	
△IC921	SE135N	IC		D955	1N4002G-T2	FR DIODE	
				D956	1N4002G-T2	FR DIODE	
				D957	1N4002G-T2	FR DIODE	
				D972	MTZJ15C-T2	Z DIODE	
				D973	1SS133-T2	DIODE	
Q001	UN2212-X	TRANSISTOR		C001	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
Q101	2SC5083/L-P/-T	TRANSISTOR		C003	QETN1HM-106Z	E CAPACITOR	10uF 50V M
Q131	2SA1530A/QR/-X	SI TRANSISTOR		C004	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M
Q161	2SC3928A/QR/-X	TRANSISTOR		C005	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q211	2SC3928A/QR/-X	TRANSISTOR		C101	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q232	2SC3928A/QR/-X	TRANSISTOR		C102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q233	2SC3928A/QR/-X	TRANSISTOR		C104	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q352	2SC3928A/QR/-X	TRANSISTOR		C105	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q353	2SC3928A/QR/-X	TRANSISTOR		C106	QETN1EM-476Z	E CAPACITOR	47uF 25V M
Q501	2SC4212/Z1	TRANSISTOR		C107	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
△Q511	2SD2645-YD	TRANSISTOR	H.OUT	C113	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
△Q531	2SC2785/JH/-T	SI TRANSISTOR		C114	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q532	2SA1530A/QR/-X	SI TRANSISTOR		C116	NCB31CK-224X	C CAPACITOR	0.22uF 16V K
Q541	2SA1530A/QR/-X	SI TRANSISTOR		C119	NDC31HJ-681X	C CAPACITOR	680pF 50V J
Q542	2SA1530A/QR/-X	SI TRANSISTOR		C120	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
Q543	2SD1267A/QP/-	POW TRANSISTOR		C124	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q621	2SD601A/QR/-X	TRANSISTOR		C131	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q622	2SD601A/QR/-X	TRANSISTOR		C161	QETN1HM-106Z	E CAPACITOR	10uF 50V M
Q623	2SA1530A/QR/-X	SI TRANSISTOR		C162	QETN1HM-106Z	E CAPACITOR	10uF 50V M
Q625	2SD601A/QR/-X	TRANSISTOR		C163	NDC31HJ-470X	C CAPACITOR	47pF 50V J
Q641	2SC3928A/QR/-X	TRANSISTOR		C164	NDC31HJ-470X	C CAPACITOR	47pF 50V J
Q642	2SC3928A/QR/-X	TRANSISTOR		C165	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q701	2SA1530A/QR/-X	SI TRANSISTOR		C166	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q951	2SD1383K/AB/-X	SI TRANSISTOR		C167	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
Q971	2SA1208/ST/Z1-T	TRANSISTOR		C202	QETN1HM-105Z	E CAPACITOR	1uF 50V M
D305	1SS133-T2	DIODE		C203	NCB31HK-152X	C CAPACITOR	1500pF 50V K
D306	1SS133-T2	DIODE		C211	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M
D307	1SS133-T2	DIODE		C212	NDC31HJ-100X	C CAPACITOR	10pF 50V J
D308	1SS133-T2	DIODE		C221	QETN1HM-106Z	E CAPACITOR	10uF 50V M
D309	1SS133-T2	DIODE		C222	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
D310	1SS133-T2	DIODE		C223	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
D352	MTZJ9.1C-T2	Z DIODE		C233	NDC31HJ-680X	C CAPACITOR	68pF 50V J
D353	1SS133-T2	DIODE		C237	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
D354	MTZJ3.3A-T2	Z DIODE		C241	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
D421	1N4003-T2	SI DIODE		C242	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
D422	MTZJ75-T2	Z DIODE		C243	QETN0JM-227Z	E CAPACITOR	220uF 6.3V M
D501	RH3G-F1	SI DIODE		C244	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
D502	RU3AM-LFC4	SI DIODE		C281	QFVF1HJ-474Z	MF CAPACITOR	0.47uF 50V J
D521	RH1S-T3	SI DIODE		C282	QETN1CM-107Z	E CAPACITOR	100uF 16V M
D523	RGF10J-04TS-T3	SI DIODE		C283	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
D525	1SS81-T5	SI DIODE		C284	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
D526	1SS81-T5	SI DIODE		C285	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
D527	1SR124-400A-T2	SI DIODE		C286	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
D529	MTZJ9.1C-T2	Z DIODE		C287	QETN1CM-107Z	E CAPACITOR	100uF 16V M
△D531	MA4068N/Z1/-T2	Z DIODE		C288	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
D535	1SS133-T2	DIODE		C302	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
D601	MTZJ9.1C-T2	Z DIODE		C352	QETN1EM-476Z	E CAPACITOR	47uF 25V M
D602	MTZJ9.1C-T2	Z DIODE		C354	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
D603	MTZJ9.1C-T2	Z DIODE		C360	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
D621	1SS133-T2	DIODE		C391	QETN1CM-107Z	E CAPACITOR	100uF 16V M
D623	1SS133-T2	DIODE		C392	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
D626	1SS133-T2	DIODE		C422	QFN32AK-102Z	M CAPACITOR	1000pF 100V K
D703	MTZJ5.6B-T2	Z DIODE		C424	QETN1VM-107Z	E CAPACITOR	100uF 35V M
D704	MTZJ5.6B-T2	Z DIODE		C425	QETN1VM-477Z	E CAPACITOR	470uF 35V M
D705	1SS133-T2	DIODE		C427	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
D706	MTZJ5.6B-T2	Z DIODE		C428	QETM1EM-228	E CAPACITOR	2200uF 25V M
D707	MTZJ5.6B-T2	Z DIODE		C431	QFLC2AK-563Z	M CAPACITOR	0.056uF 100V K
D708	MTZJ5.6B-T2	Z DIODE		C433	QETN1EM-476Z	E CAPACITOR	47uF 25V M
D709	MTZJ5.6B-T2	Z DIODE		C435	NCB21HK-183X	C CAPACITOR	0.018uF 50V K
D723	MTZJ5.6B-T2	Z DIODE		C440	QCS32HJ-100Z	C CAPACITOR	10pF 500V J
△D901	GSIB460	BRIDGE DIODE		C501	QCB32HK-151Z	C CAPACITOR	150pF 500V K
D910	MA700A-T2	SB DIODE		C502	QCB32HK-331Z	C CAPACITOR	330pF 500V K
D911	RGF10J-04TS-T3	SI DIODE		C503	QCHR2CM-105Z	E CAPACITOR	1uF 160V M
D912	RGF10J-04TS-T3	SI DIODE		C504	QEZO203-107	E CAPACITOR	100uF 160V M
D913	1SS133-T2	DIODE		C507	QEZO195-475Z	BP E CAPACITOR	4.7uF 50V M
D914	1SS133-T2	DIODE					

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
△C510	QFZ0200-422	MPP CAPACITOR	4200pF 1.5kV H	C937	QCZ0340-102	C CAPACITOR	1000pF 2kV K
△C513	QFZ0198-133	MPP CAPACITOR	0.013uF 1.5kV H	C938	QETN1EM-477Z	E CAPACITOR	470uF 25V M
C514	QFP32GJ-183	PP CAPACITOR	0.018uF 400V J	C939	QCB32HK-152Z	C CAPACITOR	1500pF 500V K
C515	QFZ0197-474	MPP CAPACITOR	0.47uF 250V J	C941	QCB32HK-102Z	C CAPACITOR	1000pF 500V K
C516	QCB32HK-561Z	C CAPACITOR	560pF 500V K	C942	QEHR1HM-105Z	E CAPACITOR	1uF 50V M
C521	QETN2EM-106Z	E CAPACITOR	10uF 250V M	C943	QETN1CM-108Z	E CAPACITOR	1000uF 16V M
C523	QEHR1VM-108Z	E CAPACITOR	1000uF 35V M	C951	QETN1EM-477Z	E CAPACITOR	470uF 25V M
C525	QETN1VM-107Z	E CAPACITOR	100uF 35V M	C952	QETN1CM-227Z	E CAPACITOR	220uF 16V M
C526	QFV21HJ-824Z	MF CAPACITOR	0.82uF 50V J	C971	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C527	QFLC2AJ-103Z	M CAPACITOR	0.01uF 100V J	C972	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C533	QETN1HM-106Z	E CAPACITOR	10uF 50V M	△C997	QCZ9079-102	C CAPACITOR	1000pF AC250V M
C601	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	△C998	QCZ9074-103	C CAPACITOR	0.01uF AC250V M
C602	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	△C999	QCZ9074-103	C CAPACITOR	0.01uF AC250V M
C603	NCB31HK-104X	C CAPACITOR	0.1uF 50V K				
C604	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C621	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R004	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C622	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R005	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C624	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	R006	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C626	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	R008	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
C627	NCF21CZ-105X	C CAPACITOR	1uF 16V Z	R009	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C628	QETN1HM-226Z	E CAPACITOR	22uF 50V M	R101	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C629	NCF21CZ-105X	C CAPACITOR	1uF 16V Z	R102	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C630	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R103	QRE121J-101Y	C RESISTOR	100Ω 1/2W J
C632	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R104	NRSA63J-180X	MG RESISTOR	18Ω 1/16W J
C633	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R105	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J
C634	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R106	NRSA63J-394X	MG RESISTOR	390kΩ 1/16W J
C635	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R112	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J
C637	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R113	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C638	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R115	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C641	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R116	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J
C642	NCB31CK-273X	C CAPACITOR	0.027uF 16V K	R117	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J
C643	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R120	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J
C644	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R121	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
C645	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R131	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C646	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R132	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C647	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R133	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J
C648	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M	R134	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C649	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M	R135	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C651	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	R161	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C652	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	R163	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C655	NCB31HK-332X	C CAPACITOR	3300pF 50V K	R164	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C656	NCB31HK-332X	C CAPACITOR	3300pF 50V K	R165	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C657	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	R166	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C658	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	R167	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C659	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R168	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C660	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R169	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J
C661	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R171	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C662	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R201	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C700	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R212	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C701	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R215	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C702	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R216	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C703	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R217	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C704	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R227	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C705	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R231	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C708	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R237	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
C709	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R238	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
C711	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R241	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C712	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R243	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C728	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R281	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C807	QETN1AM-477Z	E CAPACITOR	470uF 10V M	R282	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
C815	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R283	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
C851	QETN1EM-107Z	E CAPACITOR	100uF 25V M	R286	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C852	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R287	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C853	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R288	NRSA02J-471X	MG RESISTOR	470Ω 1/10W J
C854	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R289	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J
C856	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R290	NRSA02J-561X	MG RESISTOR	560Ω 1/10W J
C857	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	R292	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J
△C901	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R293	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
△C902	QFZ9072-473	MM CAPACITOR	0.047uF AC250V K	R296	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C903	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R297	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C904	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R298	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C905	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R301	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
△C906	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R302	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C907	QEZ0644-567	E CAPACITOR	560uF 200V K	R303	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
△C908	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R304	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C912	QCZ0340-222	C CAPACITOR	2200pF 2kV K	R305	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C913	QFLC1HJ-471Z	M CAPACITOR	470pF 50V J	R306	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C914	QETN1HM-107Z	E CAPACITOR	100uF 50V M	R318	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C916	NDC31HJ-331X	C CAPACITOR	330pF 50V J	R319	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C917	NCB31HK-182X	C CAPACITOR	1800pF 50V K	R352	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C918	NCB21HK-104X	C CAPACITOR	0.1uF 50V K	R354	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C919	QFP32GJ-103	PP CAPACITOR	0.01uF 400V J	R355	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C931	QEZ0203-227	E CAPACITOR	220uF 160V M	R356	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C932	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R358	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C933	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R359	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C934	NDC31HJ-221X	C CAPACITOR	220pF 50V J	R421	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J
C935	QETN1VM-108Z	E CAPACITOR	1000uF 35V M	R423	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R424	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	R764	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R426	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	R765	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R427	QRT029J-1R2	MF RESISTOR	1.2Ω 2W J	R766	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R428	QRE121J-120Y	C RESISTOR	12Ω 1/2W J	R767	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R429	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	R769	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R431	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	R772	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R432	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R811	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R433	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	R816	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J
R434	QRL029J-221	OMF RESISTOR	220Ω 2W J	R821	NRSA63J-184X	MG RESISTOR	180kΩ 1/16W J
R435	QRE121J-102Y	C RESISTOR	1kΩ 1/2W J	R827	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R441	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R839	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J
R501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R857	QRL029J-820	OMF RESISTOR	82Ω 2W J
R502	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	R901	QRF074K-1R2	UNF WW RESISTOR	1.2Ω 7W K
R503	QRE121J-103Y	C RESISTOR	10kΩ 1/2W J	R909	QRG01GJ-470	OMF RESISTOR	47Ω 1W J
R504	QRL039J-152	OMF RESISTOR	1.5kΩ 3W J	R911	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R505	QRL039J-152	OMF RESISTOR	1.5kΩ 3W J	R912	QRT029J-R18	MF RESISTOR	0.18Ω 2W J
R511	QRE121J-220Y	C RESISTOR	22Ω 1/2W J	R913	QRT029J-R15	MF RESISTOR	0.15Ω 2W J
R512	QRE121J-681Y	C RESISTOR	680Ω 1/2W J	△R914	QRK126J-681X	UNF C RESISTOR	680Ω 1/2W J
R516	QRZ0221-2R0	OMF RESISTOR	2Ω 7W K	△R915	QRK129J-6R8	UNF C RESISTOR	6.8Ω 1/2W J
R524	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	△R917	QRK126J-332X	UNF C RESISTOR	3.3kΩ 1/2W J
R526	QRE121J-272Y	C RESISTOR	2.7kΩ 1/2W J	R918	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R527	QRE121J-154Y	C RESISTOR	150kΩ 1/2W J	R919	QRE121J-684Y	C RESISTOR	680kΩ 1/2W J
R528	QRE121J-154Y	C RESISTOR	150kΩ 1/2W J	R924	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R529	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R930	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
△R531	QRZ0230-391X	UNF C RESISTOR	390Ω	R940	QRE121J-181Y	C RESISTOR	180Ω 1/2W J
R532	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	R941	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R533	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R950	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R534	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R951	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
△R535	NRVA02D-242X	CMF RESISTOR	2.4kΩ 1/10W D	R952	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R536	QRE121J-470Y	C RESISTOR	47Ω 1/2W J	R953	QRE121J-820Y	C RESISTOR	82Ω 1/2W J
△R537	NRVA02D-752X	CMF RESISTOR	7.5kΩ 1/10W D	R972	NRVA02D-102X	CMF RESISTOR	1kΩ 1/10W D
R538	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	R973	NRVA02D-332X	CMF RESISTOR	3.3kΩ 1/10W D
R543	QRE121J-122Y	C RESISTOR	1.2kΩ 1/2W J	R975	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R544	QRE121J-392Y	C RESISTOR	3.9kΩ 1/2W J	R977	QRE121J-473Y	C RESISTOR	47kΩ 1/2W J
R545	QRE121J-822Y	C RESISTOR	8.2kΩ 1/2W J	R978	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R546	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	△R998	QRZ9041-275	C RESISTOR	2.7MΩ 1/2W K
R547	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	R999	QRE121J-121Y	C RESISTOR	120Ω 1/2W J
R548	QRE121J-152Y	C RESISTOR	1.5kΩ 1/2W J	L001	QQL244K-560Z	PEAKING COIL	56uH K
R553	QRL039J-330	OMF RESISTOR	33Ω 3W J	L101	QQLZ014-R39	COIL	0.39uH 100mA L
△R554	QRK126J-220X	UNF C RESISTOR	22Ω 1/2W J	L131	QQL29BJ-220Z	P COIL	0.65Ω 22uH J
R555	QRT029J-2R2	MF RESISTOR	2.2Ω 2W J	L161	QQL29BJ-220Z	P COIL	0.65Ω 22uH J
R601	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	L232	QQL244K-560Z	PEAKING COIL	56uH K
R602	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	L241	QQL244K-220Z	PEAKING COIL	22uH K
R603	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	L391	QQL244K-220Z	PEAKING COIL	22uH K
R621	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	L511	QQR1027-005	LINEARITY COIL	
R623	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L512	QQLZ036-821	COIL	820uH K
R624	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	L521	QQLZ026-121	COIL	120uH A)7%
R626	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L701	QQL244K-220Z	PEAKING COIL	22uH K
R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L702	QQL244K-220Z	PEAKING COIL	22uH K
R628	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	L703	QQL244K-220Z	PEAKING COIL	22uH K
R630	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	L704	QQL244K-220Z	PEAKING COIL	22uH K
R631	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	L705	QQL244K-220Z	PEAKING COIL	22uH K
R641	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L931	QQL26AK-470Z	CHOKE COIL	47uH K
R642	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	L933	QQL26AK-470Z	CHOKE COIL	47uH K
R643	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	L937	QQL26AK-470Z	CHOKE COIL	47uH K
R644	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L940	QQR0582-001Z	FERRITE BEADS	
R645	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	T111	QQR0907-001	I F T	
R646	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	T501	QQR1414-001	DRIVE TRANSF	
R647	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	△T921	QQS0152-001	SW TRANSF	
R648	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	△T951	QQT0355-001	POWER TRANSF	
R649	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	CF001	QAX0349-001	C TRAP	47.25MHz
R651	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	CF131	QAX0639-001Z	C TRAP	4.500MHz
R652	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	CF161	QAX0642-001Z	C FILTER	4.500MHz
R653	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	CN001	QGB1505J1-35	CONNECTOR	B-B (1-35)
R654	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	CN004	QGA2501C5-07Z	CONNECTOR	W-B (1-7)
R655	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	CN005	QGA2501C5-06Z	CONNECTOR	W-B (1-6)
R657	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	CN007	QGA2501C5-06Z	CONNECTOR	W-B (1-6)
R659	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN00C	QGA2501F1-06	CONNECTOR	W-B (1-6)
R680	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	CN0E1	CE41507-001P	LV CONNECTOR	
R700	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	CN0E3	CE41507-001P	LV CONNECTOR	
R701	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN0HV	QGZ5004C1-06	CONNECTOR	(1-6)
R702	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	CN0S1	QGA2501C5-05Z	CONNECTOR	W-B (1-5)
R704	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	CN0SS	QGA2501C5-04Z	CONNECTOR	W-B (1-4)
R705	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	△CP932	ICP-N70-T	IC PROTECTOR	2.5A
R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	△CP933	ICP-N70-T	IC PROTECTOR	2.5A
R707	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	△CP936	ICP-N70-T	IC PROTECTOR	2.5A
R708	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	△F901	QMF51N1-5R0-J5	FUSE	5A AC125V
R709	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	△F905	QMFZ049-5R0Z-E	FUSE	5A 125V
R718	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	FC901	CEMG002-001Z	FUSE CLIP	
R721	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	FC902	CEMG002-001Z	FUSE CLIP	
R729	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	△FR525	QRZ9017-4R7	FUSI RESISTOR	4.7Ω 1/4W J
R731	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	HS001	LC32600-001A	HEAT SINK	
R732	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	HS002	LC31678-001A	HEAT SINK/AL-F/	
R733	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	HS003	LC32111-002A	HEAT SINK/AL-F/	
R734	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	HS004	CEHE015-001WU	HEAT SINK	
R739	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J				
R740	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J				

△Ref No.	Part No.	Part Name	Description Local
HS005	CM42862-00G-H	HEAT SINK ASSY	
HS007	CEHT11B-002QS	HEAT SINK	
J601	QNN0349-002	PIN JACK	COMP IN
K101	QQR0582-001Z	FERRITE BEADS	
K401	QQR0621-002Z	FERRITE BEADS	
K912	QQR0582-001Z	FERRITE BEADS	
K916	QQR0582-001Z	FERRITE BEADS	
K917	QQR0582-001Z	FERRITE BEADS	
K918	QQR0582-001Z	FERRITE BEADS	
K920	QQR1139-001	FERRITE BEADS	
K931	QQR0582-001Z	FERRITE BEADS	
K932	QQR0582-001Z	FERRITE BEADS	
K933	QQR0582-001Z	FERRITE BEADS	
K935	QQR0582-001Z	FERRITE BEADS	
K937	QQR0582-001Z	FERRITE BEADS	
LC601	QQR1459-001	EMI F. COIL	
LC602	QQR1459-001	EMI F. COIL	
LC603	QQR1459-001	EMI F. COIL	
△LF901	QQR1159-001	LINE FILTER	
△LF902	QQR0527-004	LINE FILTER	
△PC921	PC123Y22	PHOTO COUPLER	
△RY951	QSK0085-001	RELAY	
S421	QSL4A13-C02	LEVER SWITCH	V.CENTER
SF101	QAX0723-001	SAW FILTER	
△TH901	QAD0132-3R0	W-PIC	3Ω
△TU001	QAU0305-001	TUNER	
△VA901	ERZV10V621CS	ZNR	
X701	QAX0767-001Z	CRYSTAL	8.000000MHz

CRT SOCKET P.W. BOARD ASS'Y (SGJ-3515A-M2)

REFER TO PARTS LIST IN PAGE 3-9 FOR THIS P.W. BOARD.

AV SELECTOR P.W. BOARD ASS'Y (SGJ-5506A-M2)

REFER TO PARTS LIST IN PAGE 3-9 FOR THIS P.W. BOARD.

FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6506A-M2)

REFER TO PARTS LIST IN PAGE 3-10 FOR THIS P.W. BOARD.

LED & POWER SW P.W. BOARD ASS'Y (SGJ-7506A-M2)

REFER TO PARTS LIST IN PAGE 3-11 FOR THIS P.W. BOARD.

PRINTED WIRING BOARD PARTS LIST [AV-32F485/z]

MAIN P.W. BOARD ASS'Y (SGJ-1559A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC101	M52342FP-X	IC	
IC201	TM8812CSDNG5DB9	IC(MCU)	
IC421	LA78041	IC	
IC621	TFA9843J/N1	IC	
IC641	NJM2701M-X	IC	
IC651	NJM2150AD	IC	
IC702	AT24C08-27F485	IC	(SERVICE)
IC703	S-80840CNY-T	IC	
IC704	AN78L05-T	IC	
IC851	L7812CP	IC	
IC852	L7809CP	IC	
IC853	L7805CP	IC	
△IC911	STR-G9626-F3	IC	
△IC921	SE135N	IC	
Q001	UN2212-X	TRANSISTOR	
Q101	2SC5083/L-P/-T	TRANSISTOR	
Q131	2SA1530A/QR/-X	SI TRANSISTOR	
Q161	2SC3928A/QR/-X	TRANSISTOR	
Q211	2SC3928A/QR/-X	TRANSISTOR	
Q232	2SC3928A/QR/-X	TRANSISTOR	
Q233	2SC3928A/QR/-X	TRANSISTOR	
Q352	2SC3928A/QR/-X	TRANSISTOR	
Q353	2SC3928A/QR/-X	TRANSISTOR	
Q501	2SC4212/Z1	TRANSISTOR	
△Q511	2SD2645-YD	TRANSISTOR	H.OUT
△Q531	2SC2785/JH/-T	SI TRANSISTOR	
Q532	2SA1530A/QR/-X	SI TRANSISTOR	
Q541	2SA1530A/QR/-X	SI TRANSISTOR	
Q542	2SA1530A/QR/-X	SI TRANSISTOR	
Q543	2SD1267A/QP/-	POW TRANSISTOR	
Q621	2SD601A/QR/-X	TRANSISTOR	
Q622	2SD601A/QR/-X	TRANSISTOR	
Q623	2SA1530A/QR/-X	SI TRANSISTOR	
Q625	2SD601A/QR/-X	TRANSISTOR	
Q641	2SC3928A/QR/-X	TRANSISTOR	
Q642	2SC3928A/QR/-X	TRANSISTOR	
Q701	2SA1530A/QR/-X	SI TRANSISTOR	
Q951	2SD1383K/AB/-X	SI TRANSISTOR	
Q971	2SA1208/ST/Z1-T	TRANSISTOR	
D305	1SS133-T2	DIODE	
D306	1SS133-T2	DIODE	
D307	1SS133-T2	DIODE	
D308	1SS133-T2	DIODE	
D309	1SS133-T2	DIODE	
D310	1SS133-T2	DIODE	
D352	MTZJ9.1C-T2	Z DIODE	
D353	1SS133-T2	DIODE	
D354	MTZJ3.3A-T2	Z DIODE	
D421	1N4003-T2	SI DIODE	
D422	MTZJ75-T2	Z DIODE	
D501	RH3G-F1	SI DIODE	
D502	RU3AM-LFC4	SI DIODE	
D521	RH1S-T3	SI DIODE	
D523	RGF10J-04TS-T3	SI DIODE	
D525	1SS81-T5	SI DIODE	
D526	1SS81-T5	SI DIODE	
D527	1SR124-400A-T2	SI DIODE	
D529	MTZJ9.1C-T2	Z DIODE	
△D531	MA4068N/Z1-T2	Z DIODE	
D535	1SS133-T2	DIODE	
D601	MTZJ9.1C-T2	Z DIODE	
D602	MTZJ9.1C-T2	Z DIODE	
D603	MTZJ9.1C-T2	Z DIODE	
D621	1SS133-T2	DIODE	
D623	1SS133-T2	DIODE	
D626	1SS133-T2	DIODE	
D703	MTZJ5.6B-T2	Z DIODE	
D704	MTZJ5.6B-T2	Z DIODE	
D705	1SS133-T2	DIODE	
D706	MTZJ5.6B-T2	Z DIODE	
D707	MTZJ5.6B-T2	Z DIODE	
D708	MTZJ5.6B-T2	Z DIODE	
D709	MTZJ5.6B-T2	Z DIODE	
D723	MTZJ5.6B-T2	Z DIODE	
△D901	GSIB460	BRIDGE DIODE	
D910	MA700A-T2	SB DIODE	
D911	RGF10J-04TS-T3	SI DIODE	
D912	RGF10J-04TS-T3	SI DIODE	
D913	1SS133-T2	DIODE	
D914	1SS133-T2	DIODE	

△Ref No.	Part No.	Part Name	Description Local
D915	SARS01-T2	SI DIODE	
D917	MTZJ30A-T2	Z DIODE	
D918	MTZJ5.1C-T2	Z DIODE	
D920	1SS133-T2	DIODE	
D931	RU4AM-LFT2	SI DIODE	
D933	RU3YX-LFC4	SI DIODE	
D935	RU3YX-LFC4	SI DIODE	
D937	RU3YX-LFC4	SI DIODE	
D941	MTZJ33A-T2	Z DIODE	
D945	MTZJ9.1B-T2	Z DIODE	
D952	1SS133-T2	DIODE	
D953	1SS133-T2	DIODE	
D954	1N4002G-T2	FR DIODE	
D955	1N4002G-T2	FR DIODE	
D956	1N4002G-T2	FR DIODE	
D957	1N4002G-T2	FR DIODE	
D972	MTZJ15C-T2	Z DIODE	
D973	1SS133-T2	DIODE	
C001	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C003	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C004	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M
C005	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C101	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C104	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C105	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C106	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C107	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C113	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C114	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C116	NCB31CK-224X	C CAPACITOR	0.22uF 16V K
C119	NDC31HJ-681X	C CAPACITOR	680pF 50V J
C120	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C124	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C131	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C161	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C162	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C163	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C164	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C165	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C166	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C167	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C202	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C203	NCB31HK-152X	C CAPACITOR	1500pF 50V K
C211	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M
C212	NDC31HJ-100X	C CAPACITOR	10pF 50V J
C221	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C222	NCF31AZ-105X	C CAPACITOR	1uF 10V Z
C223	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C233	NDC31HJ-680X	C CAPACITOR	68pF 50V J
C237	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C241	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C242	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C243	QETN0JM-227Z	E CAPACITOR	220uF 6.3V M
C244	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C281	QFVF1HJ-474Z	MF CAPACITOR	0.47uF 50V J
C282	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C283	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C284	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C285	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C286	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C287	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C288	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C302	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C352	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C354	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C360	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C391	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C392	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C422	QFN32AK-102Z	M CAPACITOR	1000pF 100V K
C424	QETN1VM-107Z	E CAPACITOR	100uF 35V M
C425	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C427	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C428	QETM1EM-228	E CAPACITOR	2200uF 25V M
C431	QFLC2AK-563Z	M CAPACITOR	0.056uF 100V K
C433	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C435	NCB21HK-183X	C CAPACITOR	0.018uF 50V K
C440	QCS32HJ-100Z	C CAPACITOR	10pF 500V J
C501	QCB32HK-151Z	C CAPACITOR	150pF 500V K
C502	QCB32HK-331Z	C CAPACITOR	330pF 500V K
C503	QEH22CM-105Z	E CAPACITOR	1uF 160V M
C504	QE20203-107	E CAPACITOR	100uF 160V M
C507	QE20195-475Z	BP E CAPACITOR	4.7uF 50V M

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
△C510	QFZ0200-422	MPP CAPACITOR	4200pF 1.5kV H	C937	QCZ0340-102	C CAPACITOR	1000pF 2kV K
△C513	QFZ0200-822	MPP CAPACITOR	8200pF 1.5kV H	C938	QETN1EM-477Z	E CAPACITOR	470uF 25V M
C514	QFP32GJ-273	PP CAPACITOR	0.027uF 400V J	C939	QCB32HK-152Z	C CAPACITOR	1500pF 500V K
C515	QFZ0197-304	MPP CAPACITOR	0.3uF 250V J	C941	QCB32HK-102Z	C CAPACITOR	1000pF 500V K
C516	QCB32HK-561Z	C CAPACITOR	560pF 500V K	C942	QEHR1HM-105Z	E CAPACITOR	1uF 50V M
C521	QETN2EM-106Z	E CAPACITOR	10uF 250V M	C943	QETN1CM-108Z	E CAPACITOR	1000uF 16V M
C523	QEHR1VM-108Z	E CAPACITOR	1000uF 35V M	C951	QETN1EM-477Z	E CAPACITOR	470uF 25V M
C525	QETN1VM-107Z	E CAPACITOR	100uF 35V M	C952	QETN1CM-227Z	E CAPACITOR	220uF 16V M
C526	QFV21HJ-824Z	MF CAPACITOR	0.82uF 50V J	C971	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C527	QFLC2AJ-103Z	M CAPACITOR	0.01uF 100V J	C972	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C533	QETN1HM-106Z	E CAPACITOR	10uF 50V M	△C997	QCZ9079-102	C CAPACITOR	1000pF AC250V M
C601	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	△C998	QCZ9074-103	C CAPACITOR	0.01uF AC250V M
C602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	△C999	QCZ9074-103	C CAPACITOR	0.01uF AC250V M
C603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K				
C604	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C621	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R004	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C622	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R005	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C624	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	R006	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C626	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	R008	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
C627	NCF21CZ-105X	C CAPACITOR	1uF 16V Z	R009	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C628	QETN1HM-226Z	E CAPACITOR	22uF 50V M	R101	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C629	NCF21CZ-105X	C CAPACITOR	1uF 16V Z	R102	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C630	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R103	QRE121J-101Y	C RESISTOR	100Ω 1/2W J
C632	QETN1EM-477Z	E CAPACITOR	470uF 25V M	R104	NRSA63J-180X	MG RESISTOR	18Ω 1/16W J
C633	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R105	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J
C634	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R110	NRSA63J-394X	MG RESISTOR	390kΩ 1/16W J
C635	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R112	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J
C637	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R113	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C638	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R115	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C641	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R116	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J
C642	NCB31CK-273X	C CAPACITOR	0.027uF 16V K	R117	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J
C643	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R120	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J
C644	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R121	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
C645	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R131	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C646	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R132	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C647	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R133	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J
C648	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M	R134	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C649	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M	R135	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C651	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	R161	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C652	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	R163	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C655	NCB31HK-332X	C CAPACITOR	3300pF 50V K	R164	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C656	NCB31HK-332X	C CAPACITOR	3300pF 50V K	R165	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C657	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	R166	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C658	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	R167	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C659	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R168	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C660	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R169	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J
C661	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R171	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C662	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R201	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C700	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R212	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C701	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R215	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C702	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R216	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C703	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R217	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C704	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R227	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C705	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R231	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C708	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R237	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
C709	NDC31HJ-220X	C CAPACITOR	22pF 50V J	R238	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
C711	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R241	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C712	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R243	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C728	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R281	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C807	QETN1AM-477Z	E CAPACITOR	470uF 10V M	R282	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
C815	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R283	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
C851	QETN1EM-107Z	E CAPACITOR	100uF 25V M	R286	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C852	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R287	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C853	QETN1EM-227Z	E CAPACITOR	220uF 25V M	R288	NRSA02J-471X	MG RESISTOR	470Ω 1/10W J
C854	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R289	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J
C856	QETN1CM-227Z	E CAPACITOR	220uF 16V M	R290	NRSA02J-561X	MG RESISTOR	560Ω 1/10W J
C857	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	R292	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J
△C901	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R293	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
△C902	QFZ9072-473	MM CAPACITOR	0.047uF AC250V K	R296	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C903	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R297	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C904	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R298	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
△C905	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R301	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
△C906	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R302	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C907	QEZ0644-567	E CAPACITOR	560uF 200V K	R303	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
△C908	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	R304	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C912	QCZ0340-222	C CAPACITOR	2200pF 2kV K	R305	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C913	QFLC1HJ-471Z	M CAPACITOR	470pF 50V J	R306	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C914	QETN1HM-107Z	E CAPACITOR	100uF 50V M	R318	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C916	NDC31HJ-331X	C CAPACITOR	330pF 50V J	R319	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C917	NCB31HK-182X	C CAPACITOR	1800pF 50V K	R352	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C918	NCB21HK-104X	C CAPACITOR	0.1uF 50V K	R354	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C919	QFP32GJ-103	PP CAPACITOR	0.01uF 400V J	R355	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C931	QEZ0203-227	E CAPACITOR	220uF 160V M	R356	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C932	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R358	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C933	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R359	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C934	NDC31HJ-221X	C CAPACITOR	220pF 50V J	R421	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J
C935	QETN1VM-108Z	E CAPACITOR	1000uF 35V M	R423	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R424	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	R764	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R426	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	R765	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R427	QRT029J-1R2	MF RESISTOR	1.2Ω 2W J	R766	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R428	QRE121J-120Y	C RESISTOR	12Ω 1/2W J	R767	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R429	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	R769	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R431	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	R772	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R432	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R811	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R433	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	R816	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J
R434	QRL029J-221	OMF RESISTOR	220Ω 2W J	R821	NRSA63J-184X	MG RESISTOR	180kΩ 1/16W J
R435	QRE121J-821Y	C RESISTOR	820Ω 1/2W J	R827	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R441	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R839	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J
R501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R857	QRL029J-820	OMF RESISTOR	82Ω 2W J
R502	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	R901	QRF074K-1R2	UNF WW RESISTOR	1.2Ω 7W K
R503	QRE121J-103Y	C RESISTOR	10kΩ 1/2W J	R909	QRG01GJ-470	OMF RESISTOR	47Ω 1W J
R504	QRL039J-152	OMF RESISTOR	1.5kΩ 3W J	R911	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R505	QRL039J-152	OMF RESISTOR	1.5kΩ 3W J	R912	QRT029J-R18	MF RESISTOR	0.18Ω 2W J
R511	QRE121J-220Y	C RESISTOR	22Ω 1/2W J	R913	QRT029J-R15	MF RESISTOR	0.15Ω 2W J
R512	QRE121J-681Y	C RESISTOR	680Ω 1/2W J	△R914	QRK126J-681X	UNF C RESISTOR	680Ω 1/2W J
R516	QRZ0221-2R0	OMF RESISTOR	2Ω 7W K	△R915	QRK129J-6R8	UNF C RESISTOR	6.8Ω 1/2W J
R524	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	△R917	QRK126J-332X	UNF C RESISTOR	3.3kΩ 1/2W J
R526	QRE121J-272Y	C RESISTOR	2.7kΩ 1/2W J	R918	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R527	QRE121J-154Y	C RESISTOR	150kΩ 1/2W J	R919	QRE121J-684Y	C RESISTOR	680kΩ 1/2W J
R528	QRE121J-124Y	C RESISTOR	120kΩ 1/2W J	R924	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R529	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R930	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
△R531	QRZ0230-391X	UNF C RESISTOR	390Ω	R940	QRE121J-181Y	C RESISTOR	180Ω 1/2W J
R532	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	R941	QRL029J-183	OMF RESISTOR	18kΩ 2W J
R533	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R950	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R534	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R951	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
△R535	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D	R952	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R536	QRE121J-470Y	C RESISTOR	47Ω 1/2W J	R953	QRE121J-820Y	C RESISTOR	82Ω 1/2W J
△R537	NRVA02D-752X	CMF RESISTOR	7.5kΩ 1/10W D	R972	NRVA02D-102X	CMF RESISTOR	1kΩ 1/10W D
R538	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	R973	NRVA02D-332X	CMF RESISTOR	3.3kΩ 1/10W D
R543	QRE121J-122Y	C RESISTOR	1.2kΩ 1/2W J	R975	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R544	QRE121J-392Y	C RESISTOR	3.9kΩ 1/2W J	R977	QRE121J-473Y	C RESISTOR	47kΩ 1/2W J
R545	QRE121J-153Y	C RESISTOR	15kΩ 1/2W J	R978	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R546	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	△R998	QRZ9041-275	C RESISTOR	2.7MΩ 1/2W K
R547	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	R999	QRE121J-121Y	C RESISTOR	120Ω 1/2W J
R548	QRE121J-152Y	C RESISTOR	1.5kΩ 1/2W J				
R553	QRL039J-330	OMF RESISTOR	33Ω 3W J	L001	QQL244K-560Z	PEAKING COIL	56uH K
△R554	QRK126J-220X	UNF C RESISTOR	22Ω 1/2W J	L101	QQLZ014-R39	COIL	0.39uH 100mA L
R555	QRT029J-2R2	MF RESISTOR	2.2Ω 2W J	L131	QQL29BJ-220Z	P COIL	0.65Ω 22uH J
R601	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	L161	QQL29BJ-220Z	P COIL	0.65Ω 22uH J
R602	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	L232	QQL244K-560Z	PEAKING COIL	56uH K
R603	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	L241	QQL244K-220Z	PEAKING COIL	22uH K
R621	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	L391	QQL244K-220Z	PEAKING COIL	22uH K
R623	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L511	QQR1409-002	LINEARITY COIL	
R624	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	L512	QQLZ028-501	COIL	500uH
R626	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L521	QQR1333-001	CHOKE COIL	
R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L701	QQL244K-220Z	PEAKING COIL	22uH K
R628	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	L702	QQL244K-220Z	PEAKING COIL	22uH K
R630	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	L703	QQL244K-220Z	PEAKING COIL	22uH K
R631	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	L704	QQL244K-220Z	PEAKING COIL	22uH K
R641	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L705	QQL244K-220Z	PEAKING COIL	22uH K
R642	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	L931	QQL26AK-470Z	CHOKE COIL	47uH K
R643	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	L933	QQL26AK-470Z	CHOKE COIL	47uH K
R644	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L937	QQL26AK-470Z	CHOKE COIL	47uH K
R645	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	L940	QQR0582-001Z	FERRITE BEADS	
R646	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	T111	QQR0907-001	I F T	
R647	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T501	QQR1414-001	DRIVE TRANSF	
R648	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	△T921	QQS0152-001	SW TRANSF	
R649	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	△T951	QQT0355-001	POWER TRANSF	
R651	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J				
R652	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	CF001	QAX0349-001	C TRAP	47.25MHz
R653	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	CF131	QAX0639-001Z	C TRAP	4.500MHz
R654	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	CF161	QAX0642-001Z	C FILTER	4.500MHz
R655	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	CN001	QGB1505J1-35	CONNECTOR	B-B (1-35)
R657	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	CN004	QGA2501C5-07Z	CONNECTOR	W-B (1-7)
R659	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN005	QGA2501C5-06Z	CONNECTOR	W-B (1-6)
R680	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	CN007	QGA2501C5-06Z	CONNECTOR	W-B (1-6)
R700	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	CN00C	QGA2501F1-06	CONNECTOR	W-B (1-6)
R701	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN0E1	CE41507-001P	LV CONNECTOR	
R702	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	CN0E3	CE41507-001P	LV CONNECTOR	
R704	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	CN0HV	QGZ5004C1-06	CONNECTOR	(1-6)
R705	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	CN0S1	QGA2501C5-05Z	CONNECTOR	W-B (1-5)
R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	CN0SS	QGA2501C5-04Z	CONNECTOR	W-B (1-4)
R707	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	△CP932	ICP-N70-T	IC PROTECTOR	2.5A
R708	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	△CP933	ICP-N70-T	IC PROTECTOR	2.5A
R709	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	△CP936	ICP-N70-T	IC PROTECTOR	2.5A
R718	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	△F901	QMF51N1-5R0-J5	FUSE	5A AC125V
R721	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	△F905	QMFZ049-5R0Z-E	FUSE	5A 125V
R729	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	△FR525	QRZ9017-4R7	FUSI RESISTOR	4.7Ω 1/4W J
R731	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	HS001	LC32600-001A	HEAT SINK	
R732	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	HS002	LC31678-001A	HEAT SINK/AL-F/	
R733	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	HS003	LC32111-002A	HEAT SINK/AL-F/	
R734	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	HS004	CEHE015-001WU	HEAT SINK	
R739	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	HS005	CM42862-00G-H	HEAT SINK ASSY	
R740	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	HS007	CEHT11B-002QS	HEAT SINK	

△Ref No.	Part No.	Part Name	Description Local
J601	QNN0349-002	PIN JACK	COMP IN
K101	QQR0582-001Z	FERRITE BEADS	
K401	QQR0621-002Z	FERRITE BEADS	
K912	QQR0582-001Z	FERRITE BEADS	
K916	QQR0582-001Z	FERRITE BEADS	
K917	QQR0582-001Z	FERRITE BEADS	
K918	QQR0582-001Z	FERRITE BEADS	
K920	QQR1139-001	FERRITE BEADS	
K931	QQR0582-001Z	FERRITE BEADS	
K932	QQR0582-001Z	FERRITE BEADS	
K933	QQR0582-001Z	FERRITE BEADS	
K935	QQR0582-001Z	FERRITE BEADS	
K937	QQR0582-001Z	FERRITE BEADS	
LC601	QQR1459-001	EMI F. COIL	
LC602	QQR1459-001	EMI F. COIL	
LC603	QQR1459-001	EMI F. COIL	
△LF901	QQR1159-001	LINE FILTER	
△LF902	QQR0527-004	LINE FILTER	
△PC921	PC123Y22	PHOTO COUPLER	V.CENTER
△RY951	QSK0085-001	RELAY	
S421	QSL4A13-C02	LEVER SWITCH	
SF101	QAX0723-001	SAW FILTER	
△TH901	QAD0132-3R0	W-PIC	
△TU001	QAU0305-001	TUNER	3Ω
△VA901	ERZV10V621CS	ZNR	8.000000MHz
X701	QAX0767-001Z	CRYSTAL	

CRT SOCKET P.W. BOARD ASS'Y (SGJ-3514A-M2)

REFER TO PARTS LIST IN PAGE 3-15 FOR THIS P.W. BOARD.

AV SELECTOR P.W. BOARD ASS'Y (SGJ-5506A-M2)

REFER TO PARTS LIST IN PAGE 3-9 FOR THIS P.W. BOARD.

FRONT CONTROL P.W. BOARD ASS'Y (SGJ-6506A-M2)

REFER TO PARTS LIST IN PAGE 3-10 FOR THIS P.W. BOARD.


LED & POWER SW P.W. BOARD ASS'Y (SGJ-7506A-M2)

REFER TO PARTS LIST IN PAGE 3-11 FOR THIS P.W. BOARD.

REMOTE CONTROL UNIT PARTS LIST (RM-C1258G-1H)

△Ref No.	Part No.	Part Name	Description Local
	UR77EC0603B	BATTERY COVER	

PACKING

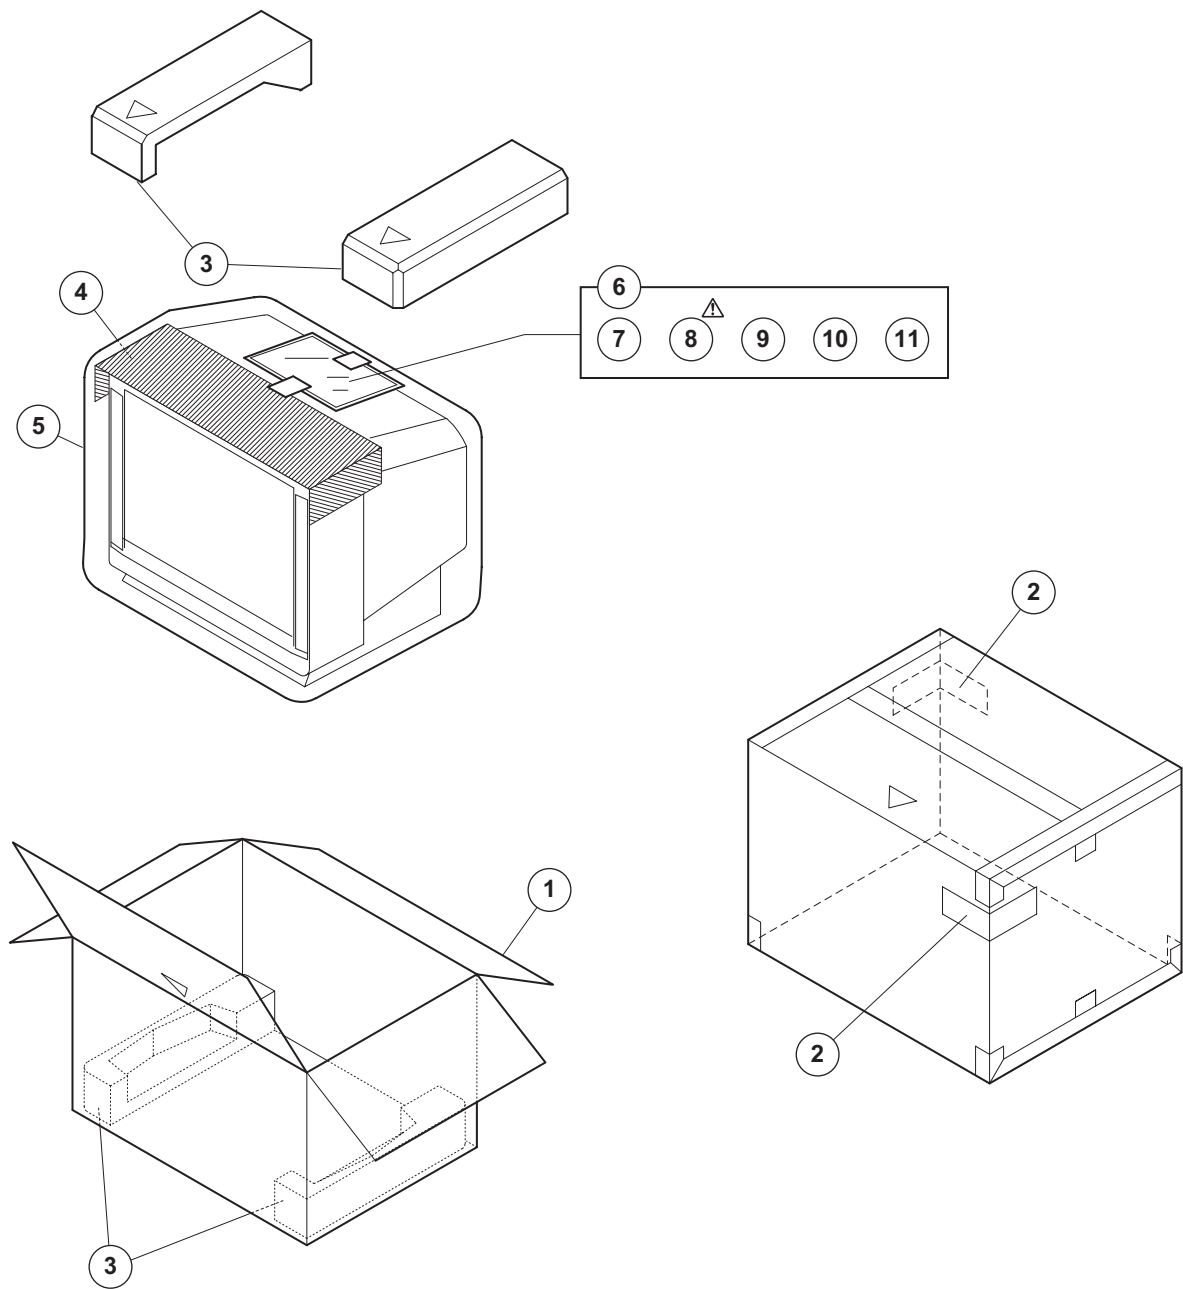

PACKING PARTS LIST

⚠	Ref.No.	Part No.	Part Name	Description	Local
	1	LC10181-033B-A	PACKING CASE		
	2	CM36616-001-A	CORNER LABEL	2pcs in 1set	
	3	LC11560-002E-A	CUSHION ASSY	4pcs in 1set	
	4	CP30055-A02-A	TOP COVER		
	5	CP30056-A04-A	POLY BAG		
	6	QPA02503505	POLY BAG	25cm x 35cm	
	7	RM-C1258G-1H	REMOCON		
⚠	8	LCT1562-001A-A	INST BOOK	English/French	
	9	BT-51034-1Q	REGIST. CARD		
	10	BT-52006-2Q	WARRANTY CARD		
	11	-----	BATTERY	R6P/AA(x2)	

AV-32F475_N, AV-32F475_Z, AV-32F485_N, AV-32F485_Z

STANDARD CIRCUIT DIAGRAM

■ NOTE ON USING CIRCUIT DIAGRAMS

1.SAFETY

The components identified by the  symbol and shading are critical for safety. For continued safety replace safety critical components only with manufactures recommended parts.

2.SPECIFIED VOLTAGE AND WAVEFORM VALUES

The voltage and waveform values have been measured under the following conditions.

- (1)Input signal : Colour bar signal
- (2)Setting positions of each knob/button and variable resistor : Original setting position when shipped
- (3)Internal resistance of tester : DC 20k Ω /V
- (4)Oscilloscope sweeping time : H $\Rightarrow$ 20 μ s / div
: V $\Rightarrow$ 5ms / div
: Others $\Rightarrow$ Sweeping time is specified
- (5)Voltage values : All DC voltage values

* Since the voltage values of signal circuit vary to some extent according to adjustments, use them as reference values.

3.INDICATION OF PARTS SYMBOL [EXAMPLE]

- In the PW board : R1209 $\rightarrow$ R209

4.INDICATIONS ON THE CIRCUIT DIAGRAM

(1)Resistors

● Resistance value

- No unit : [Ω]
- K : [k Ω]
- M : [M Ω]

● Rated allowable power

- No indication : 1/16 [W]
- Others : As specified

● Type

- No indication : Carbon resistor
- OMR : Oxide metal film resistor
- MFR : Metal film resistor
- MPR : Metal plate resistor
- UNFR : Uninflammable resistor
- FR : Fusible resistor

* Composition resistor 1/2 [W] is specified as 1/2S or Comp.

(2)Capacitors

● Capacitance value

- 1 or higher : [pF]
- less than 1 : [μ F]

● Withstand voltage

- No indication : DC50[V]
- Others : DC withstand voltage [V]
- AC indicated : AC withstand voltage [V]

* Electrolytic Capacitors

47/50[Example]: Capacitance value [μ F]/withstand voltage[V]

● Type

- No indication : Ceramic capacitor
- MM : Metalized mylar capacitor
- PP : Polypropylene capacitor
- MPP : Metalized polypropylene capacitor
- MF : Metalized film capacitor
- TF : Thin film capacitor
- BP : Bipolar electrolytic capacitor
- TAN : Tantalum capacitor

(3)Coils

- No unit : [μ H]
- Others : As specified

(4)Power Supply


-  : B1
-  : B2 (12V)
-  : 9V
-  : 5V

* Respective voltage values are indicated

(5)Test point

-  : Test point
-  : Only test point display

(6)Connecting method

-  : Connector
-  : Wrapping or soldering
-  : Receptacle

(7)Ground symbol

-  : LIVE side ground
-  : ISOLATED(NEUTRAL) side ground
-  : EARTH ground
-  : DIGITAL ground

5.NOTE FOR REPAIRING SERVICE

This model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : () side GND and the ISOLATED(NEUTRAL) : () side GND. Therefore, care must be taken for the following points.

- (1)Do not touch the LIVE side GND or the LIVE side GND and the ISOLATED(NEUTRAL) side GND simultaneously. if the above caution is not respected, an electric shock may be caused. Therefore, make sure that the power cord is surely removed from the receptacle when, for example, the chassis is pulled out.
- (2)Do not short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or never measure with a measuring apparatus measure with a measuring apparatus (oscilloscope, etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND at the same time. If the above precaution is not respected, a fuse or any parts will be broken.

◆ Since the circuit diagram is a standard one, the circuit and circuit constants may be subject to change for improvement without any notice.

NOTE

◆ Due improvement in performance, some part numbers show in the circuit diagram may not agree with those indicated in the part list.

When ordering parts, please use the numbers that appear in the Parts List.

CONTENTS






SEMICONDUCTOR SHAPES	2-2
BLOCK DIAGRAM	2-3
CIRCUIT DIAGRAMS	2-5
MAIN PWB CIRCUIT DIAGRAM	2-5
AV SELECTOR PWB CIRCUIT DIAGRAM	2-9
CRT SOCKET PWB CIRCUIT DIAGRAM	2-11
FRONT CONTROL PWB CIRCUIT DIAGRAM	2-13
LED & POWER SW PWB CIRCUIT DIAGRAM	2-14
PATTERN DIAGRAMS	2-15
MAIN PWB PATTERN	2-15
AV SELECTOR PWB PATTERN	2-17
CRT SOCKET PWB PATTERN	2-17
FRONT CONTROL PWB PATTERN	2-18
LED & POWER SW PWB PATTERN	2-18
CHANNEL CHART (US)	2-19
CHANNEL CHART (CA)	2-20

USING P.W. BOARD






PWB ASS'Y name	AV-32F475/Y	AV-32F475/Z	AV-32F485/Y	AV-32F485/Z
MAIN P.W. BOARD	SGJ-1553A-M2	SGJ-1554A-M2	SGJ-1558A-M2	SGJ-1559A-M2
AV SELECTOR P.W. BOARD	SGJ-5506A-M2	←	←	←
CRT SOCKET P.W. BOARD	SGJ-3515A-M2	SGJ-3514A-M2	SGJ-3515A-M2	SGJ-3514A-M2
FRONT CONTROL P.W. BOARD	SGJ-6506A-M2	←	←	←
LED & POWER SW P.W. BOARD	SGJ-7506A-M2	←	←	←

SEMICONDUCTOR SHAPES



TRANSISTOR

BOTTOM VIEW	FRONT VIEW				TOP VIEW
					CHIP TR 


IC


BOTTOM VIEW	FRONT VIEW			TOP VIEW
				

CHIP IC

TOP VIEW		
		

BLOCK DIAGRAM


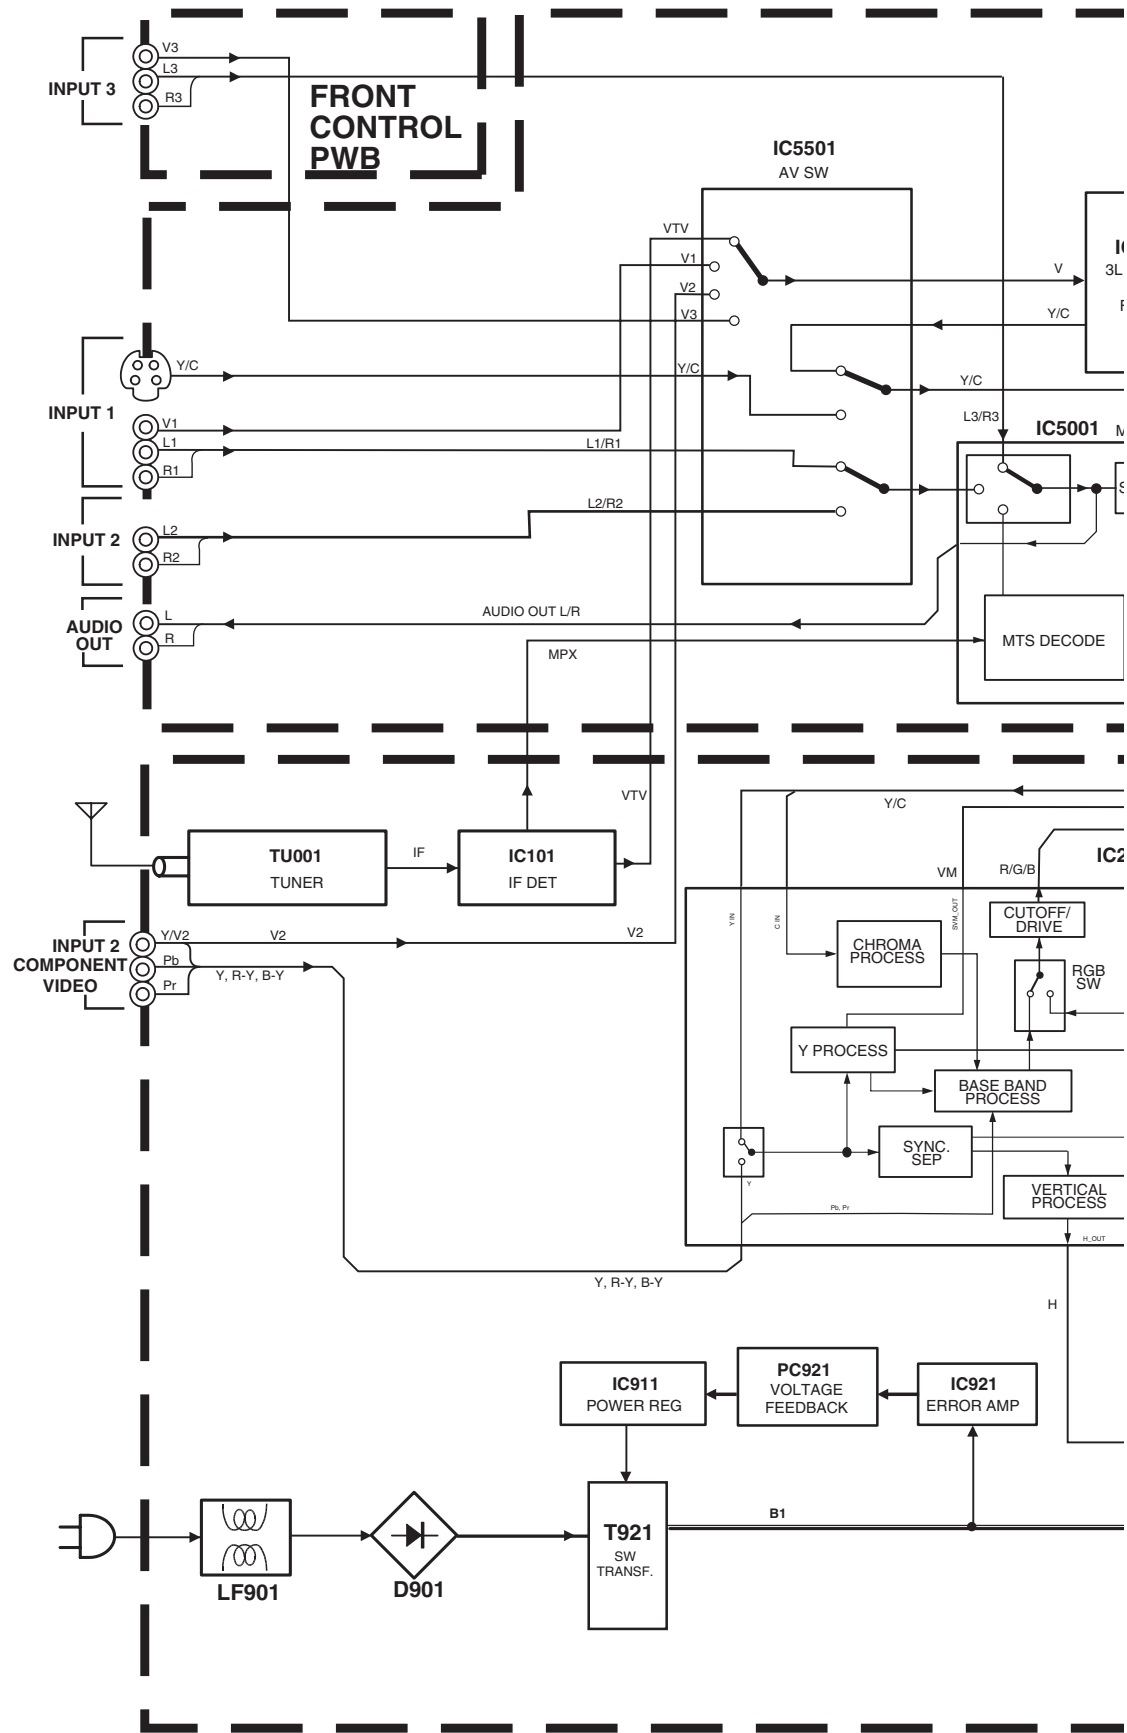



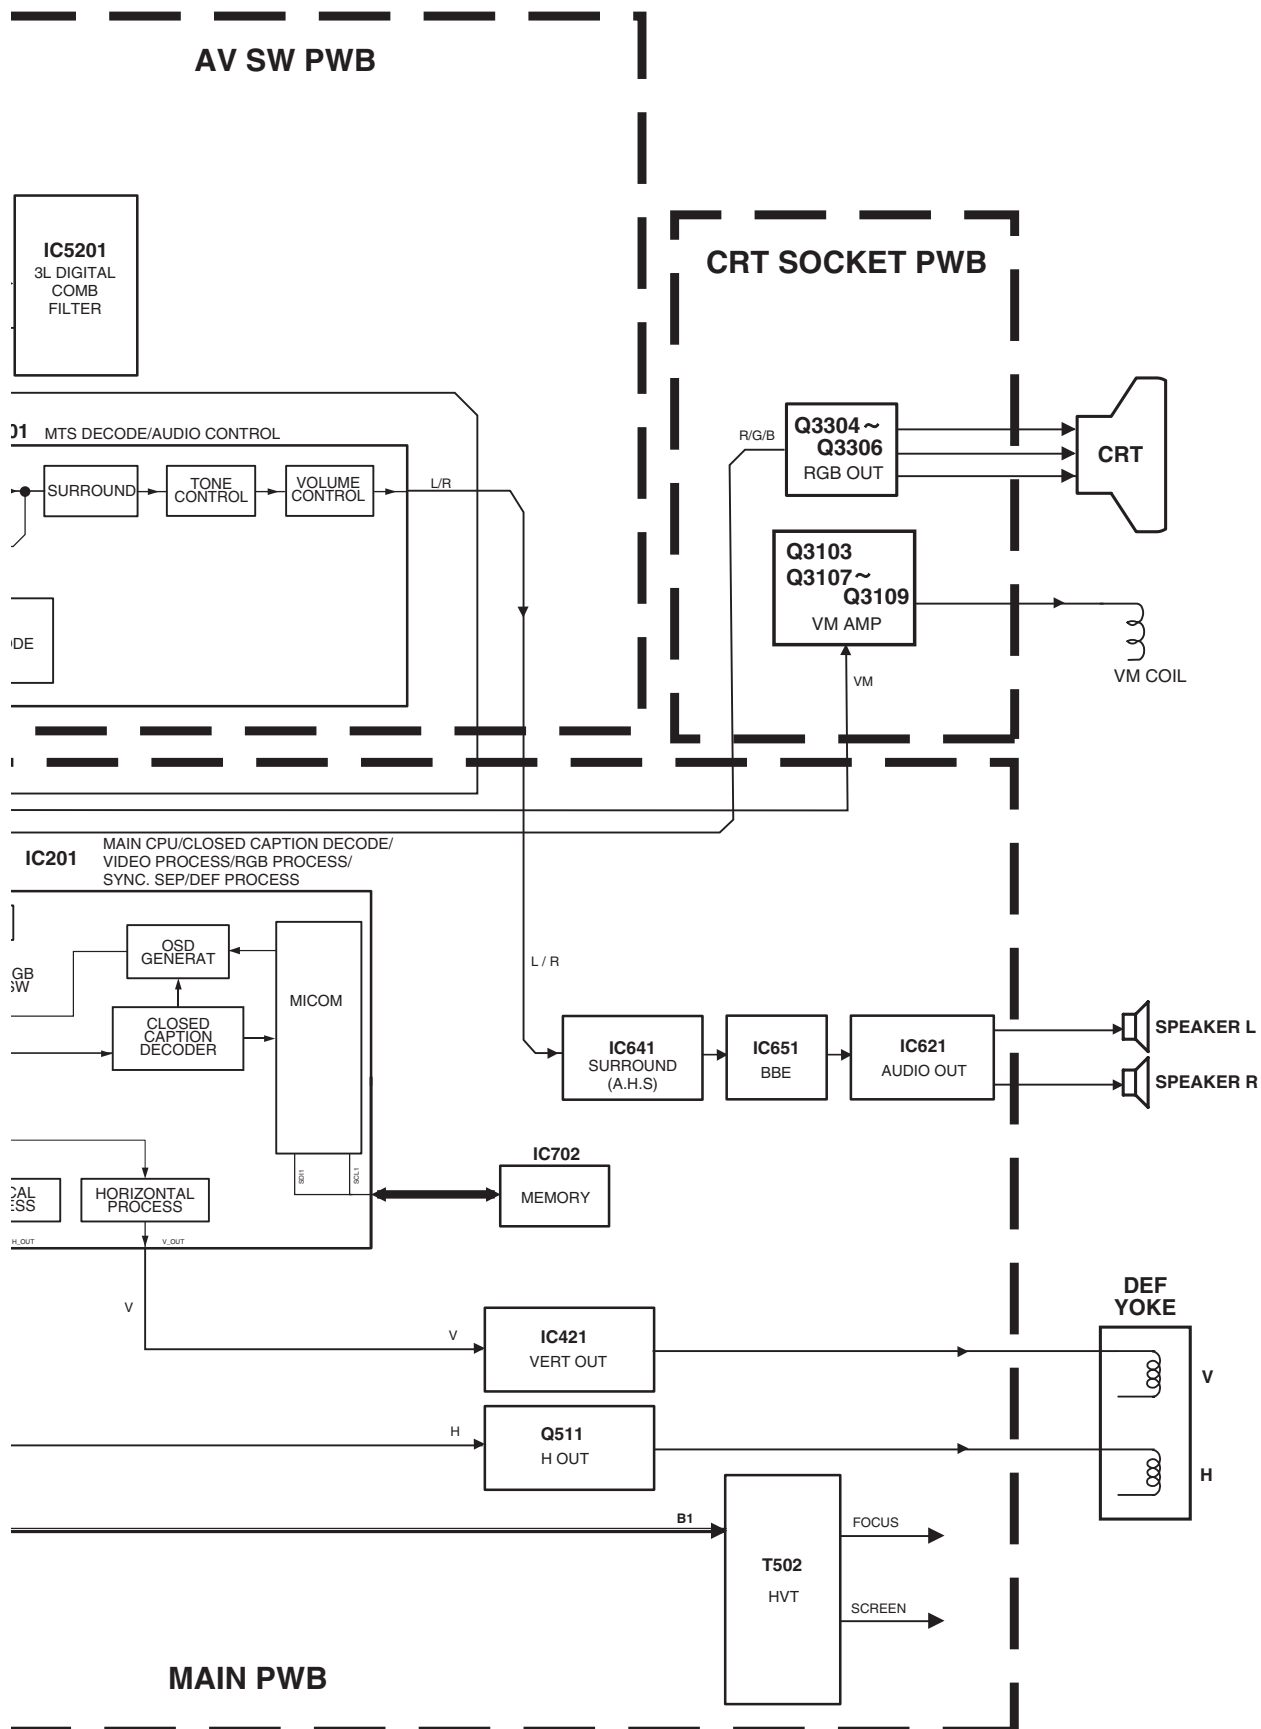


CIRCUIT DIAGRAMS
MAIN PWB CIRCUIT DIAGRAM (1/2) SHEET1

* DIFFERENCE LIST

NO.	REV.	DESCRIPTION
1001	001	INITIAL RELEASE
1002	001	REVISION 1
1003	001	REVISION 2
1004	001	REVISION 3
1005	001	REVISION 4
1006	001	REVISION 5
1007	001	REVISION 6
1008	001	REVISION 7
1009	001	REVISION 8
1010	001	REVISION 9
1011	001	REVISION 10
1012	001	REVISION 11
1013	001	REVISION 12
1014	001	REVISION 13
1015	001	REVISION 14
1016	001	REVISION 15
1017	001	REVISION 16
1018	001	REVISION 17
1019	001	REVISION 18
1020	001	REVISION 19
1021	001	REVISION 20
1022	001	REVISION 21
1023	001	REVISION 22
1024	001	REVISION 23
1025	001	REVISION 24
1026	001	REVISION 25
1027	001	REVISION 26
1028	001	REVISION 27
1029	001	REVISION 28
1030	001	REVISION 29
1031	001	REVISION 30
1032	001	REVISION 31
1033	001	REVISION 32
1034	001	REVISION 33
1035	001	REVISION 34
1036	001	REVISION 35
1037	001	REVISION 36
1038	001	REVISION 37
1039	001	REVISION 38
1040	001	REVISION 39
1041	001	REVISION 40
1042	001	REVISION 41
1043	001	REVISION 42
1044	001	REVISION 43
1045	001	REVISION 44
1046	001	REVISION 45
1047	001	REVISION 46
1048	001	REVISION 47
1049	001	REVISION 48
1050	001	REVISION 49
1051	001	REVISION 50
1052	001	REVISION 51
1053	001	REVISION 52
1054	001	REVISION 53
1055	001	REVISION 54
1056	001	REVISION 55
1057	001	REVISION 56
1058	001	REVISION 57
1059	001	REVISION 58
1060	001	REVISION 59
1061	001	REVISION 60
1062	001	REVISION 61
1063	001	REVISION 62
1064	001	REVISION 63
1065	001	REVISION 64
1066	001	REVISION 65
1067	001	REVISION 66
1068	001	REVISION 67
1069	001	REVISION 68
1070	001	REVISION 69
1071	001	REVISION 70
1072	001	REVISION 71
1073	001	REVISION 72
1074	001	REVISION 73
1075	001	REVISION 74
1076	001	REVISION 75
1077	001	REVISION 76
1078	001	REVISION 77
1079	001	REVISION 78
1080	001	REVISION 79
1081	001	REVISION 80
1082	001	REVISION 81
1083	001	REVISION 82
1084	001	REVISION 83
1085	001	REVISION 84
1086	001	REVISION 85
1087	001	REVISION 86
1088	001	REVISION 87
1089	001	REVISION 88
1090	001	REVISION 89
1091	001	REVISION 90
1092	001	REVISION 91
1093	001	REVISION 92
1094	001	REVISION 93
1095	001	REVISION 94
1096	001	REVISION 95
1097	001	REVISION 96
1098	001	REVISION 97
1099	001	REVISION 98
1100	001	REVISION 99
1101	001	REVISION 100

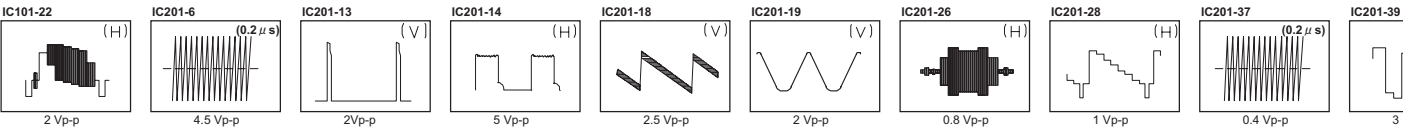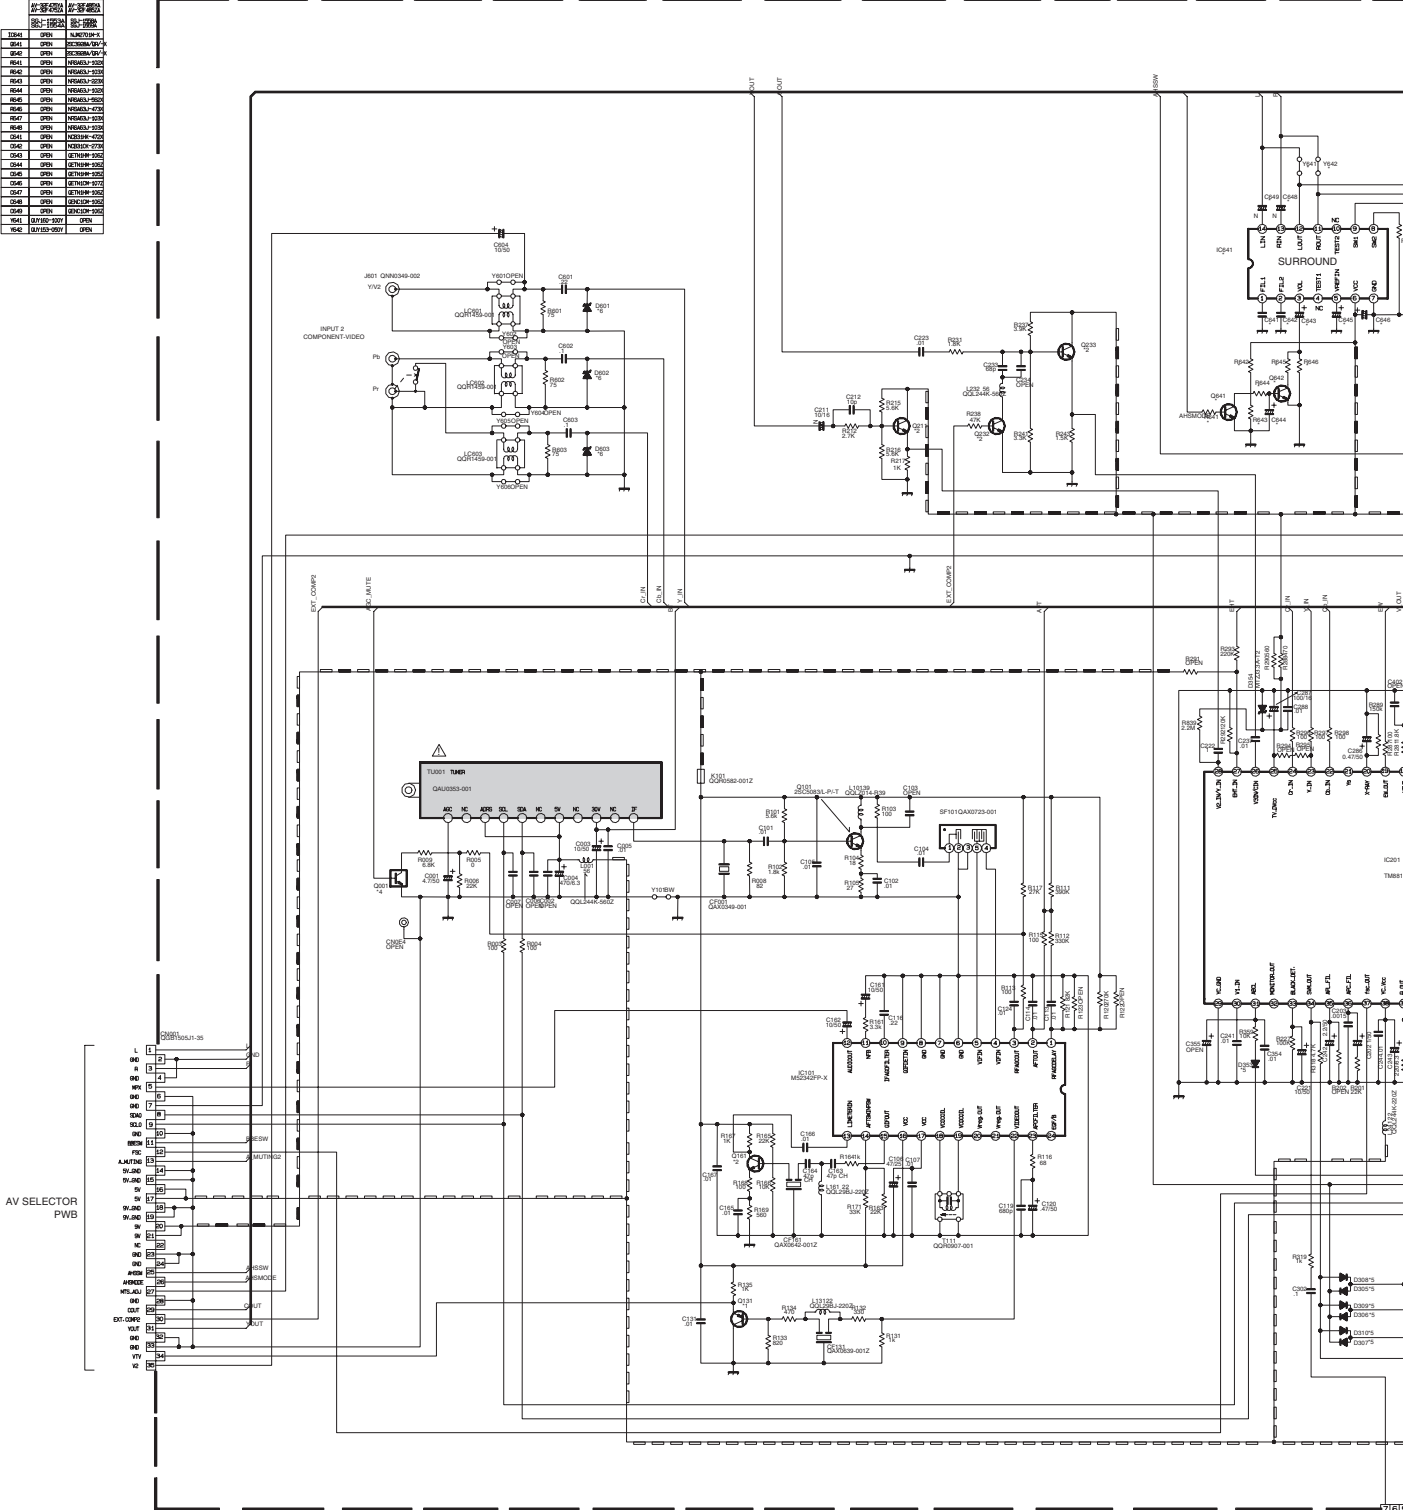

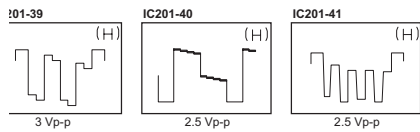
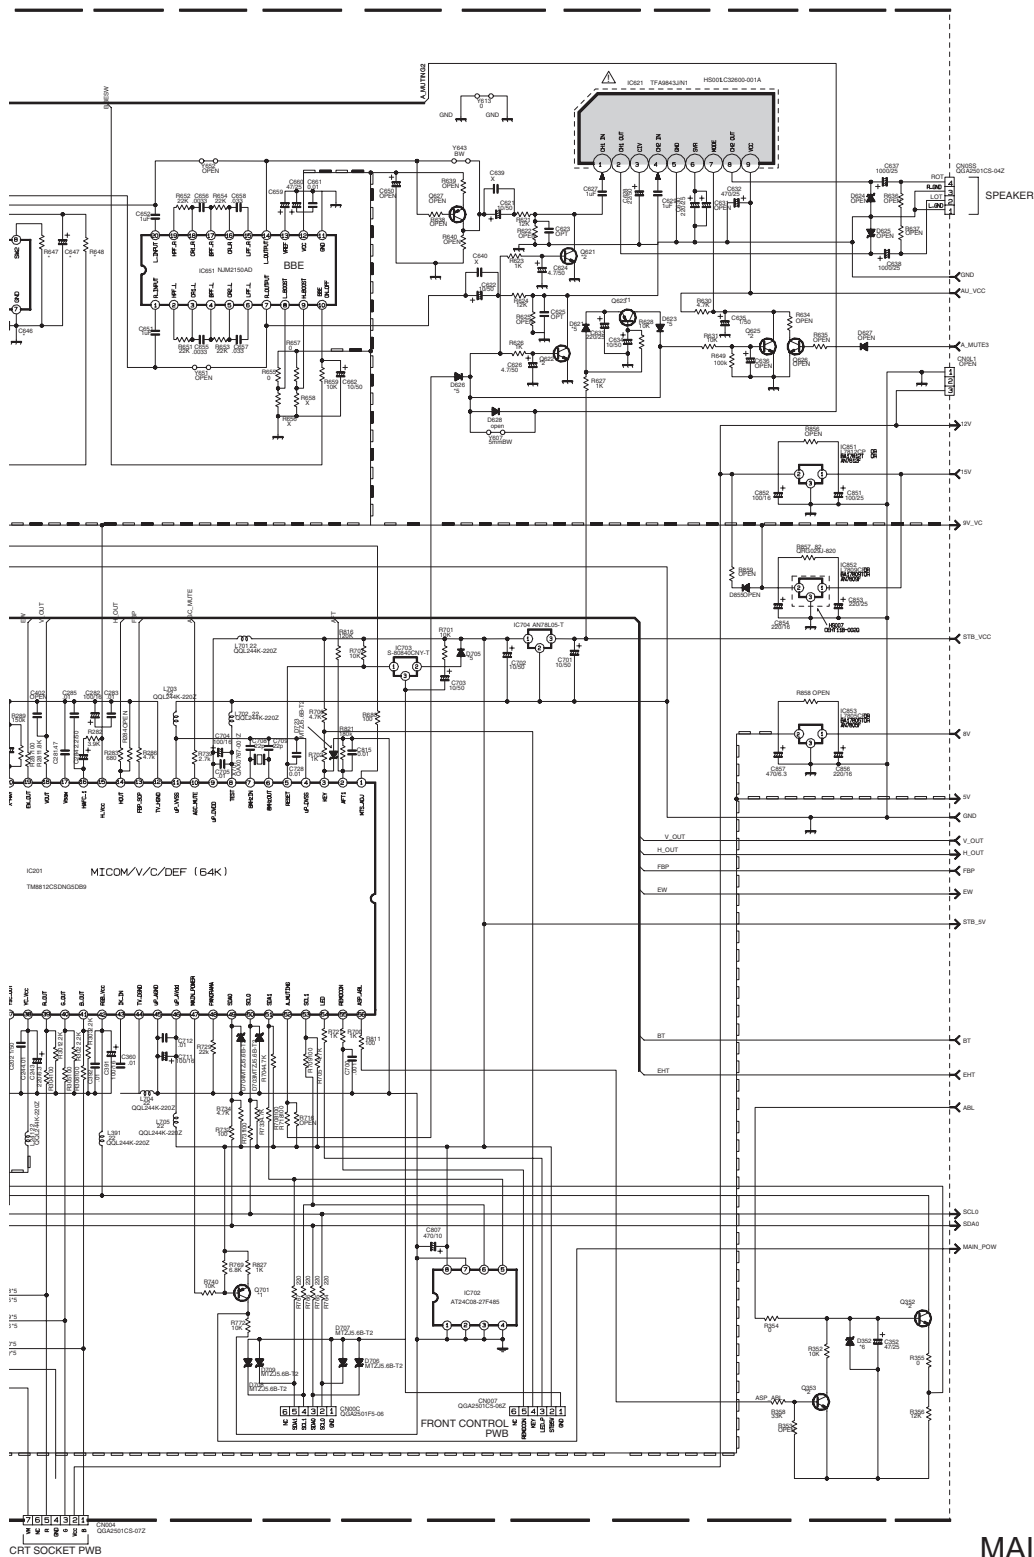



NOTE			
*1 : CHIP PNP T ₁	25A1530A/GRV-X	OR	25B705A/GRV-X
*2 : CHIP PNP T ₂	25C3628A/GRV-X	OR	25D651A/GRV-X
*3 : CHIP PNP D-T ₁	DTA1248A-X	OR	DTA1248A-X
*4 : CHIP PNP D-T ₂	DTA1248A-X	OR	DTA1248A-X
*5 : SI DIODE	15S133-T2		
*6 : ZENER DIODE	MTZJ9.1C-T2		
*7 : ZENER DIODE	MTZJ9.1C-T2		
*8 : SI DIODE	15S133-T2		
*9 : SI DIODE	15S133-T2		
*10 : PNP TE	25A1530A/GRV-X	OR	25B705A/GRV-X
*11 : SI DIODE	15S133-T2		

MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)
IC 101		IC 621		Q 161	
1	2	1	3.1	E	2
2	2.5	2	10	C	5.7
3	3.9	3	3.1	B	2.7
4	1.4	4	3.1	Q 211	
5	1.4	5	0	E	3.7
6	0	6	11.4	C	8.8
7	0	7	19.3	B	0
8	0	8	10	Q 232	
9	0	9	19.8	E	0
10	4.2	IC 641		C	0.9
11	2.5	1	4.4	B	0.1
12	4.2	2	4.4	Q 233	
13	2.1	3	4.4	E	3.3
14	3.5	4	4.4	C	8.8
15	2.1	5	4.4	B	4
16	8.8	6	8.8	Q 352	
17	8.8	7	0	E	8.1
18	3.9	8	0	C	8.8
19	3.9	9	0.1	B	9
20	4.8	10	4.4	Q 353	
21	4.8	11	4.4	E	0
22	3.3	12	4.4	C	9
23	3.3	13	4.4	B	0
24	2.1	14	4.4	Q 623	
IC 201		IC 651		E	10.3
1	0	1	4.4	C	-0.9
2	1.5	2	4.4	B	10.4
3	4.7	3	4.4	Q 625	
4	0	4	4.4	E	0
5	5	5	4.4	C	19.3
6	2.2	6	4.4	B	0
7	2	7	4.4	Q 641	
8	0	8	8.8	E	0
9	5	9	8.8	C	1.3
10	0	10	1.6	B	0.1
11	0	11	0	Q 642	
12	0	12	8.8	E	0
13	1.1	13	4.4	C	0
14	1.9	14	4.4	B	0.7
15	8.8	15	4.4	Q 701	
16	6.3	16	4.4	E	3.7
17	3.5	17	4.4	C	2.4
18	4.2	18	4.4	B	3
19	4.5	19	4.4	TU 001	
20	0	20	4.4	1	3.9
21	0			2	0
22	2.1	IC 702		3	4.8
23	2.3	1	0	4	3.7
24	2.1	2	0	5	3.9
25	3.5	3	0	6	4.7
26	2.2	4	0	7	4.8
27	3.5	5	4.8	8	0
28	2.4	6	4.7	9	31.4
29	0	7	0	10	0
30	2.2	8	5	11	0
31	6.1	IC 703			
32	0	1	0		
33	1.9	2	5		
34	3.5	3	5		
35	1.7	IC 851			
36	2.7	1	15.5		
37	2.8	2	11.9		
38	4.8	3	0		
39	2	IC 852			
40	1.9	1	15.6		
41	1.9	2	8.8		
42	8.8	3	0		
43	4.3	IC 853			
44	0	1	7.9		
45	0	2	4.9		
46	5	3	0		
47	0	Q 001			
48	0	E	0		
49	3.9	C	3.9		
50	3.7	B	0		
51	4.8	Q 101			
52	0	E	1		
53	4.7	C	8.8		
54	0	B	1.7		
55	4.9	Q 131			
56	0	E	2.2		
		C	0		
		B	1.6		

MAIN PWB ASS'Y (1/2)
 SGJ-1553A-M2: AV-32F475/Y
 SGJ-1554A-M2: AV-32F475/Z
 SGJ-1558A-M2: AV-32F485/Y
 SGJ-1559A-M2: AV-32F485/Z


2-7

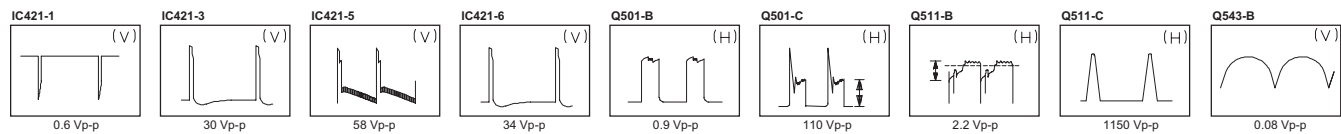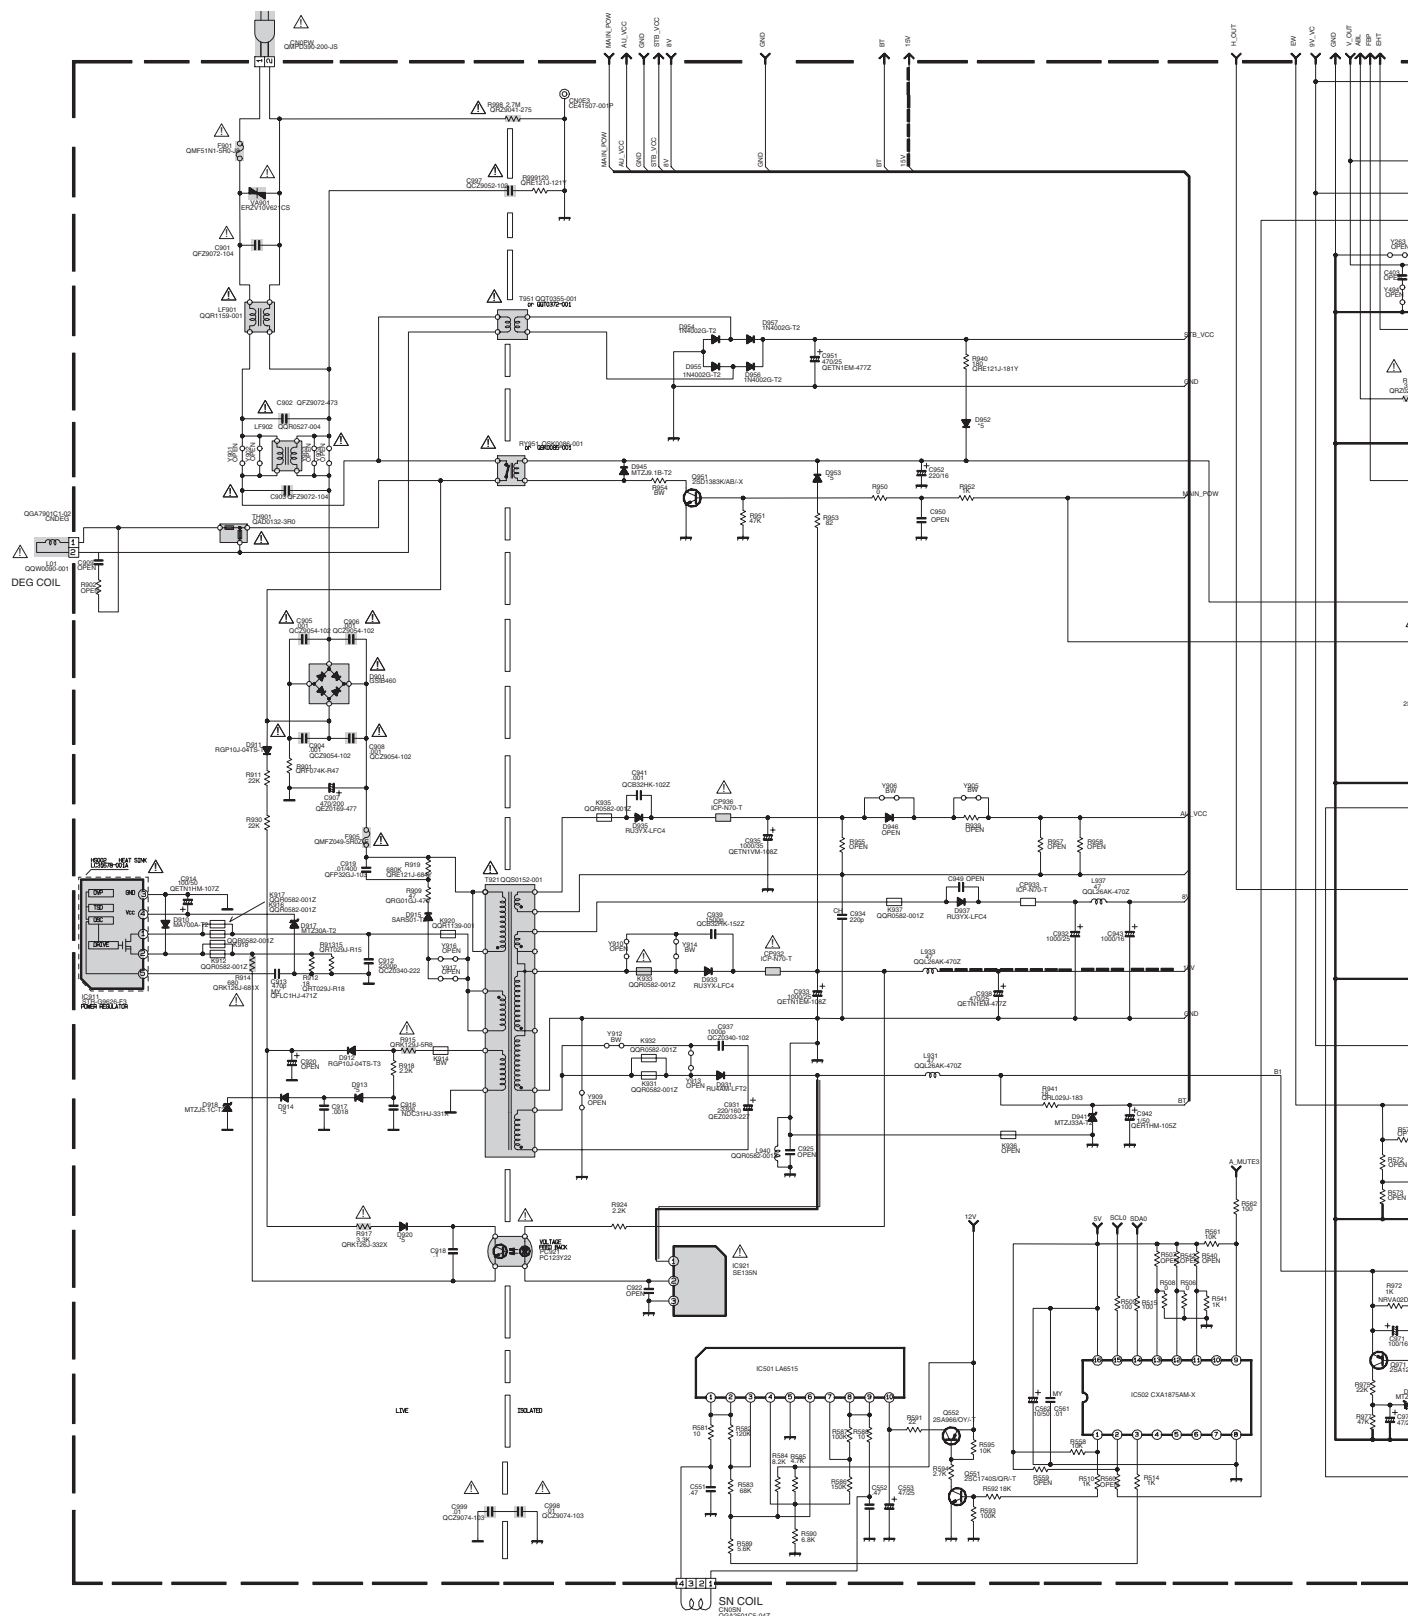





MODE PIN NO.	DC (V)
IC 421	
1	2.6
2	27.9
3	2.3
4	0
5	14.6
6	28.2
7	2.6
IC 911	
1	126
2	0.1
3	0
4	18.4
5	1.7
IC 921	
1	14.5
2	13.3
3	0
Q 501	
E	0
C	59.2
B	0.4
Q 511	
E	0
C	-0.1
B	133
Q 531	
E	0
C	9.9
B	0
Q 532	
E	27.9
C	0
B	9.8
Q 541	
E	5
C	0.5
B	4.4
Q 542	
E	5
C	0
B	4.4
Q 543	
E	0
C	19.3
B	0.6
Q 961	
E	0
C	0.6
B	1.3
Q 971	
E	134.4
C	0.1
B	134.1
PC 921	
1	14
2	13
3	1.7
4	16.6


NOTE					
#1	CHD PNP Tr	2541530A/GR-X	OR	25B7080A/GR-X	BW * BUS WIRE
#2	CHD NPN Tr	25C2860A/GR-X	OR	25D010A/GR-X	X * NON-MOUNT (OPEN)
#3	CHD PNP D-T	07A120A/GR-X	OR	07A120-X	Δ * SAFETY PARTS
#4	CHD NPN D-T	07C1240A-X	OR	07N221-X	0 0 RESISTOR
#5	ST DIODE	15R133-Tr			* * DIFFERENCE PARTS
#6	ZENER DIODE	MTZ.95-1C2			
#7	ZENER DIODE	MTZ.65-6A-2			
#8	ST DIODE	RG10J-5025-Tr			
#9	ST DIODE	15P05-Tr	OR	1N4003-Tr	
#10	PNP Tr	2544030AS/GR-X			
#11	ST DIODE	07A120A/GR-X			

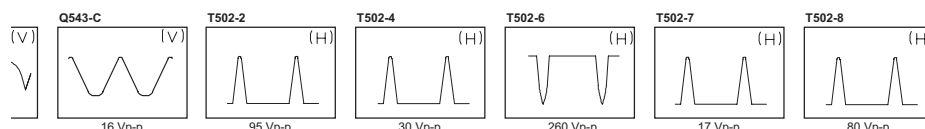

MAIN PWB ASS'Y (2/2)
SGJ-1553A-M2: AV-32F475/Y
SGJ-1554A-M2: AV-32F475/Z
SGJ-1558A-M2: AV-32F485/Y
SGJ-1559A-M2: AV-32F485/Z

AV SELECTOR PWB CIRCUIT DIAGRAM SHEET 3

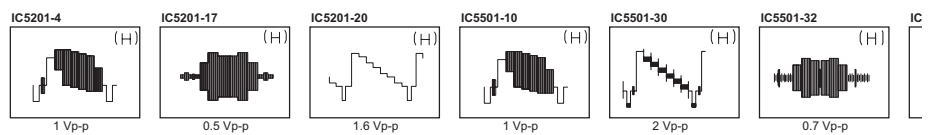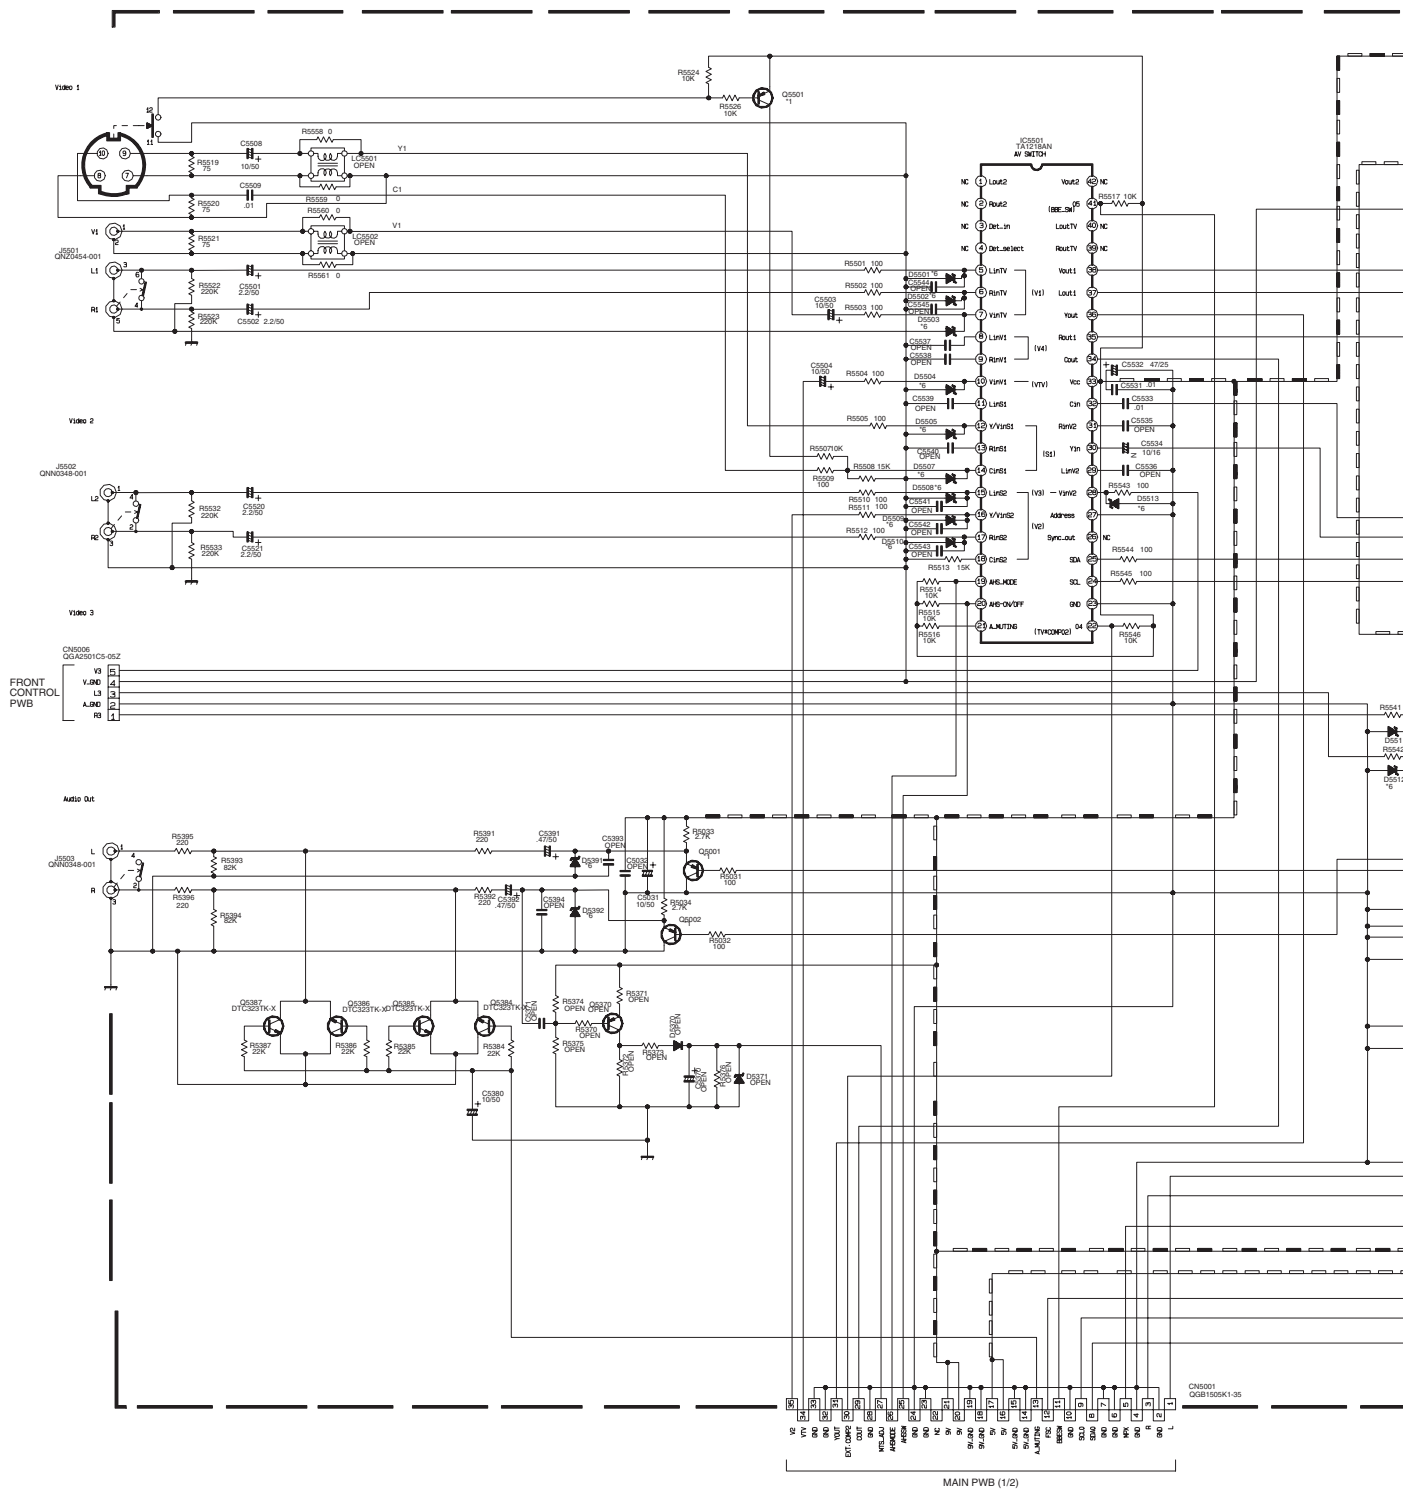


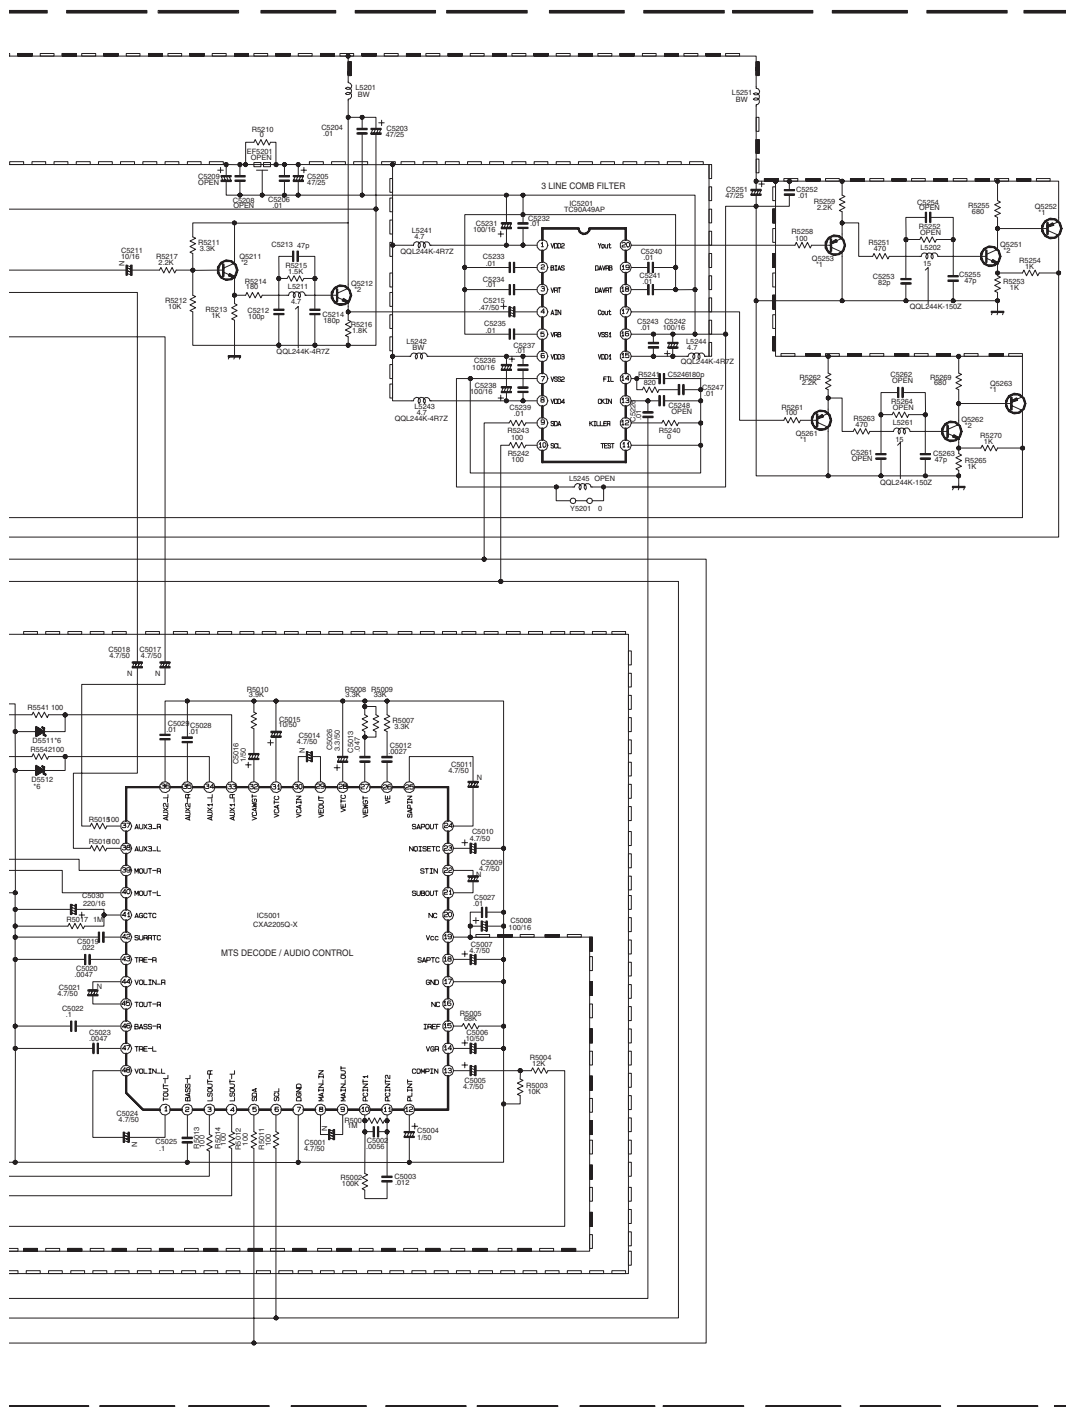

NOTE


- *1 : CHIP PNP T₁ 2SA1530A/GR/-X OR 2SB709A/GR/-X BW : BUS WIRE
- *2 : CHIP NPN T₁ 2SC3928A/GR/-X OR 2SD601A/GR/-X X : NON-MOUNT (OPEN)
- *3 : CHIP PNP D-T₁ DTA124EKA-X OR UN2112-X Δ : SAFETY PARTS
- *4 : CHIP NPN D-T₁ DTC124EKA-X OR UN2212-X O : 0 Ω RESISTOR
- *5 : SI DIODE 1S5133-T2 * : DIFFERENCE PARTS
- *6 : ZENER DIODE MT2J9, 1C-T2
- *7 : ZENER DIODE MT2J9, 6A-T2
- *8 : SI DIODE R6P10J-04TS-T3 OR R6P10J-502S-T3
- *9 : SI DIODE 1SR35-400A-T2 OR 1N4003-T2
- *10 : PNP TE 2SA933AS/GR/-3

IC5501-34




1.5 Vp-p

IC5501-36



1.7 Vp-p


IC5501-38




2 Vp-p

AV SELECTOR PWB ASS'Y SGJ-5506A-M2


MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)
IC 5001		40	3.8
1	4	41	8.2
2	4.1	42	4.3
3	4	IC 5201	
4	4	1	4.5
5	3.9	2	1.3
6	3.7	3	3.1
7	0	4	2.3
8	4	5	1.8
9	4	6	4.9
10	4	7	0
11	3.9	8	4.9
12	5.1	9	3.9
13	4	10	3.7
14	1.2	11	0
15	0	12	0
16	0	13	2.5
17	0	14	1.8
18	3	15	4.9
19	8.8	16	0
20	0	17	2.3
21	0	18	3.1
22	4	19	1.8
23	4.1	20	2.3
24	3.8	Q 5001	
25	4	E	4.7
26	3.9	C	0
27	4	B	4
28	1.7	Q 5002	
29	4	E	4.7
30	4	C	0
31	1.6	B	4
32	4	Q 5211	
33	4	E	5.9
34	4	C	8.8
35	4	B	6.6
36	4	Q 5212	
37	4	E	5.2
38	4	C	8.8
39	4	B	5.9
40	4	Q 5251	
41	0.6	E	2.4
42	4	C	8.1
43	0	B	3
44	4	Q 5252	
45	4	E	8.8
46	0	C	3.9
47	4	B	8.1
48	4	Q 5253	
IC 5501		E	3
1	3.8	C	0
2	3.8	B	2.3
3	6.4	Q 5261	
4	3.6	E	3
5	5.1	C	0
6	5.1	B	2.3
7	5.1	Q 5262	
8	5.1	E	2.4
9	5.1	C	8.1
10	5.1	B	3
11	5.1	Q 5263	
12	5.1	E	8.8
13	5.1	C	3.9
14	1.7	B	8.1
15	5.1	Q 5384	
16	5.1	E	0
17	5.1	C	0
18	1.7	B	0
19	0.1	Q 5385	
20	0.1	E	0
21	0	C	0
22	0.1	B	0
23	0	Q 5386	
24	3.7	E	0
25	3.9	C	0
26	0.7	B	0
27	0	Q 5387	
28	5.1	E	0
29	5.1	C	0
30	5.1	B	0
31	5.1	Q 5370	
32	5	E	8.8
33	8.8	C	0
34	3.6	B	8.2
35	3.8	Q 5501	
36	3.6	E	8.8
37	3.8	C	1.7
38	4.3	B	8.8
39	3.8		

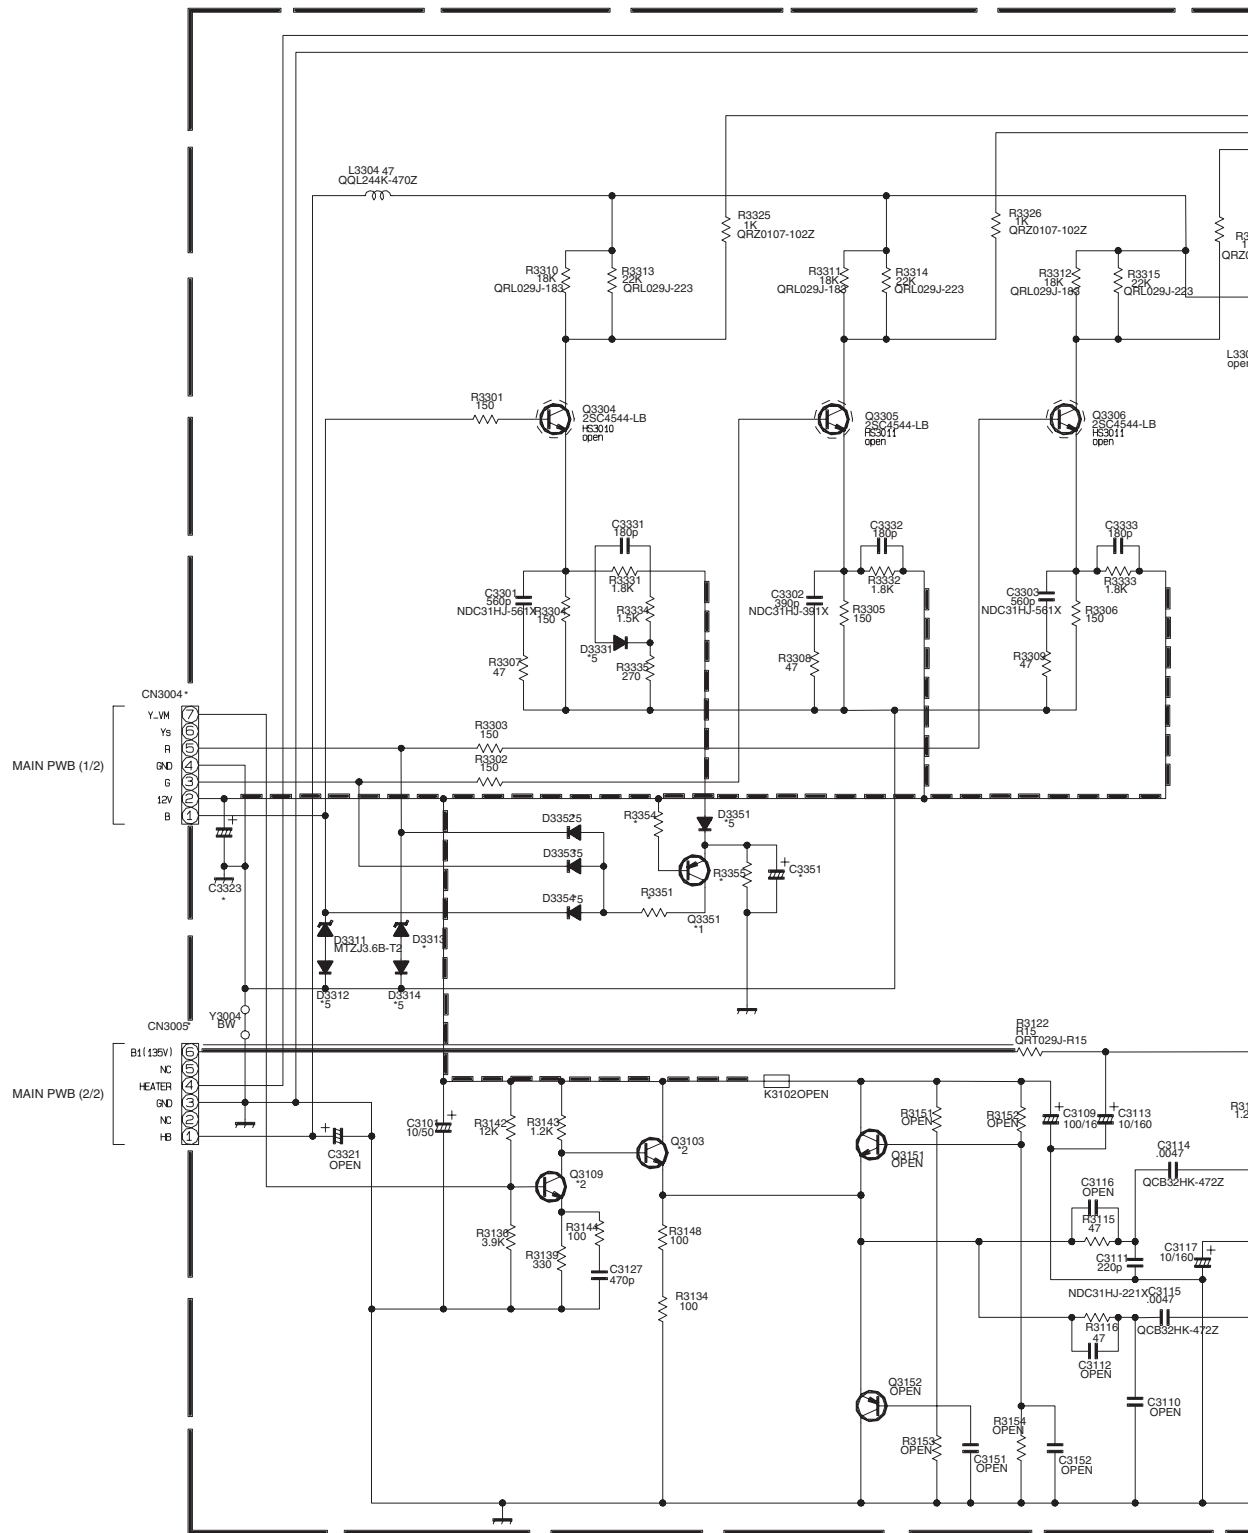

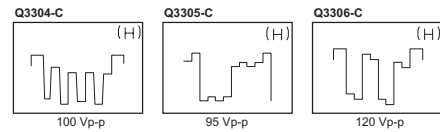


MODE PIN NO.	DC (V)
Q 3304	
E	1.5
C	160.5
B	2
Q 3305	
E	1.6
C	159.8
B	2
Q 3306	
E	1.6
C	156
B	2.1
Q 3351	
E	11.8
C	-1
B	11.9
Q 3103	
E	3.3
C	11.9
B	0
Q 3107	
E	132.6
C	69.9
B	132.2
Q 3108	
E	4.5
C	69.5
B	5.1
Q 3109	
E	2.2
C	4.1
B	2.8

	AV-35F75A AV-35F75B	AV-35F74A AV-35F74B
	SGJ-3515A	SGJ-3514A
VO1	ABGA-2930-03	ABGFEQ-42X
SK3001	ABG35-001	ABG35-006
CN3004	NAA009-002A	NAA009-003
CN3005	QJ8003-0702A	QJ8003-0740B
CN30E2	QJ8130-4664A	QJ8130-4664A
CN30E4	QJ8130-4664A	QJ8130-4664A
D3313	MTJZ3-6B-12	MTJZ3-6B-11
R3354	NFA63J-102X	NFA63J-103
R3365	QJY150-150X	QJY150-150
R3367	QJY150-150X	QJY150-150
C3323	QETN10-477Z	QETN10-47
C3361	QETN10M-227Z	QETN10M-33
C3361	NFA63J-151X	NFA63J-15
R3395	NFA63J-103X	NFA63J-10

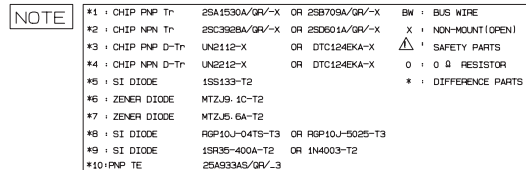


2-12

2-13




FRONT CONTROL PWB ASS'Y
SGJ-6506A-M2

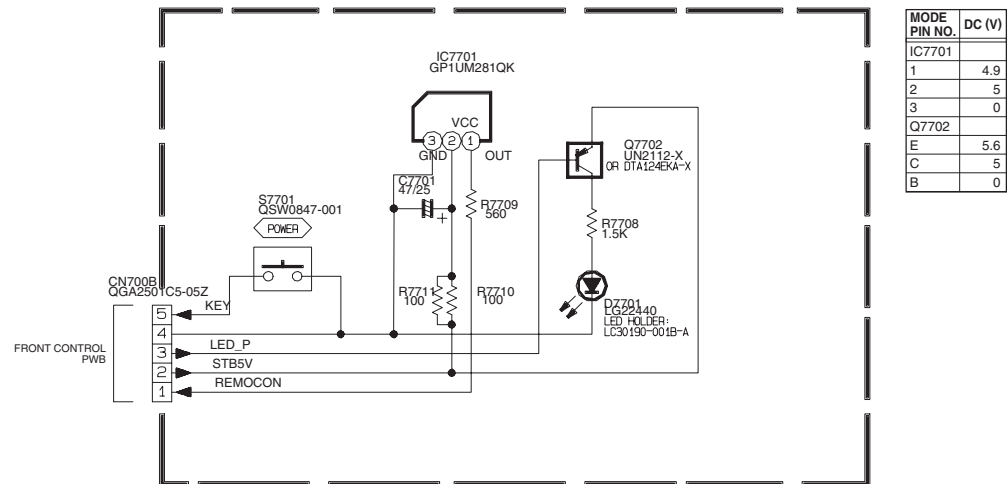


LED & POWER SW PWB ASS'Y
SGJ-7506A-M2

MAIN PWB PATTERN




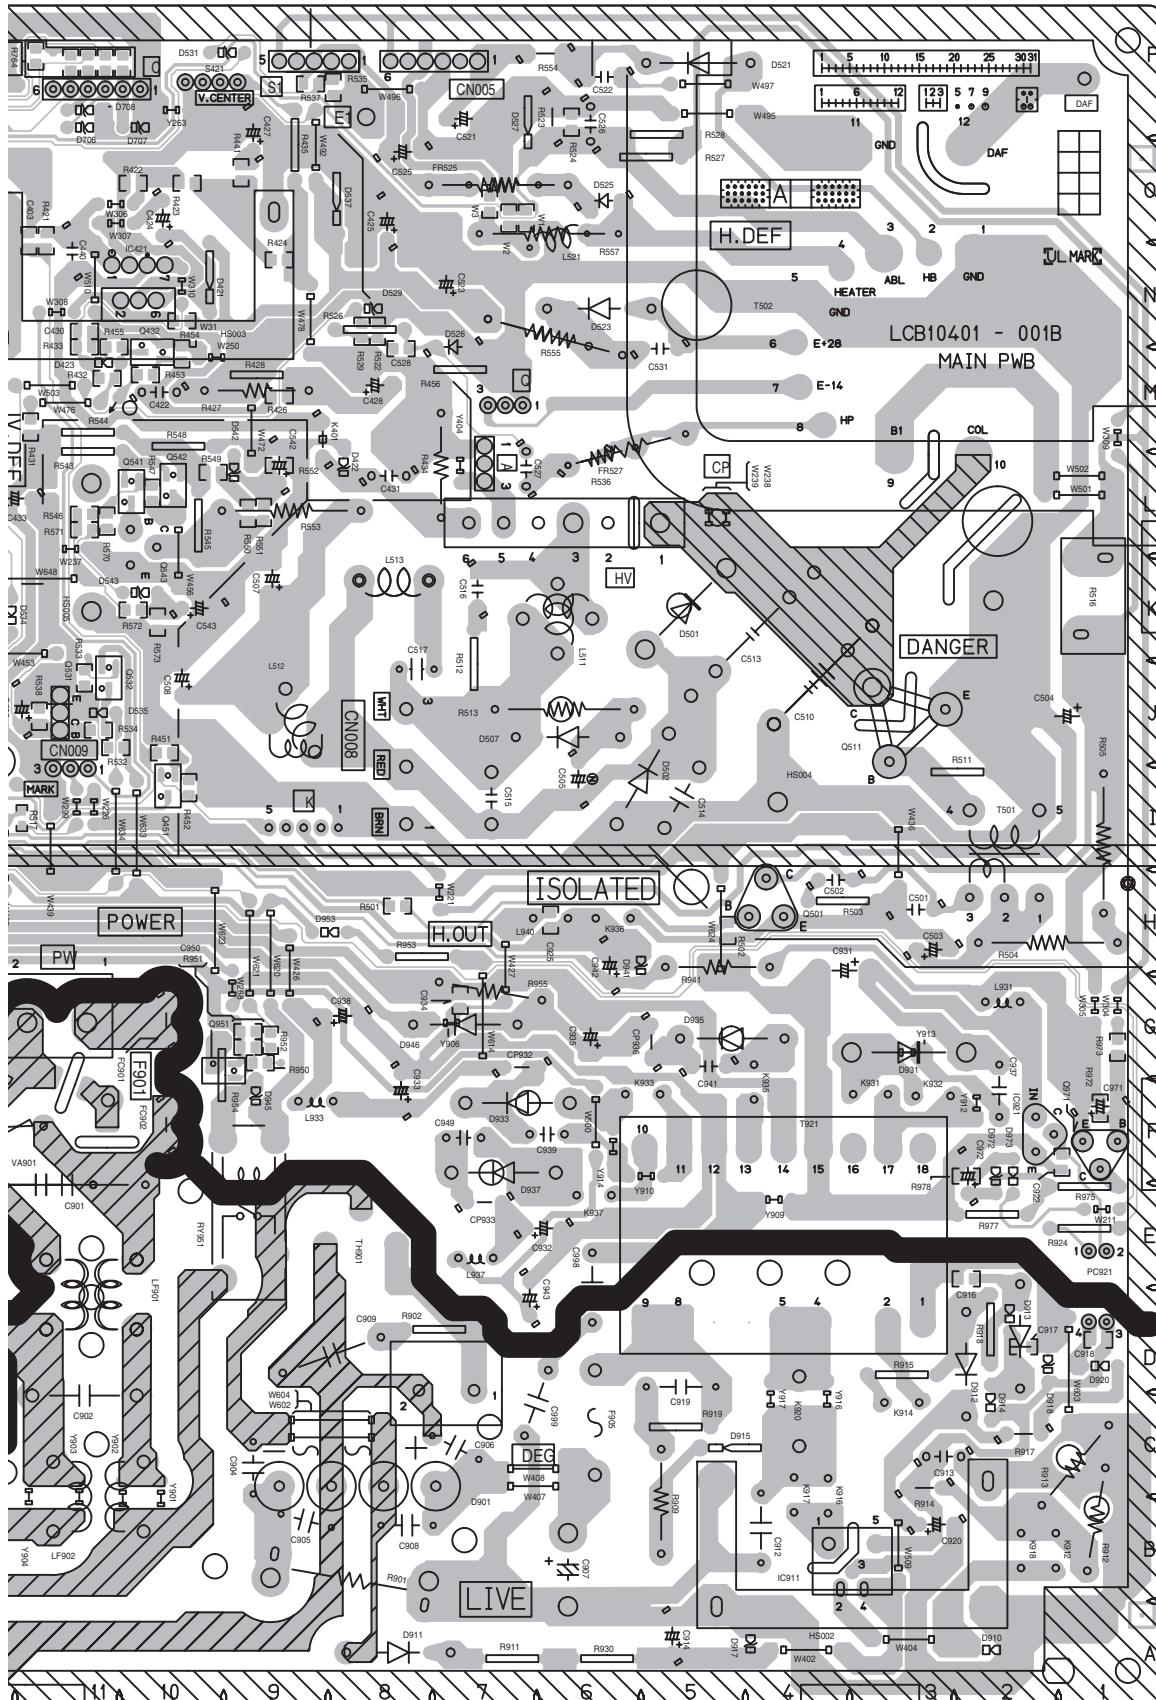

AV SELECTOR PWB PATTERN

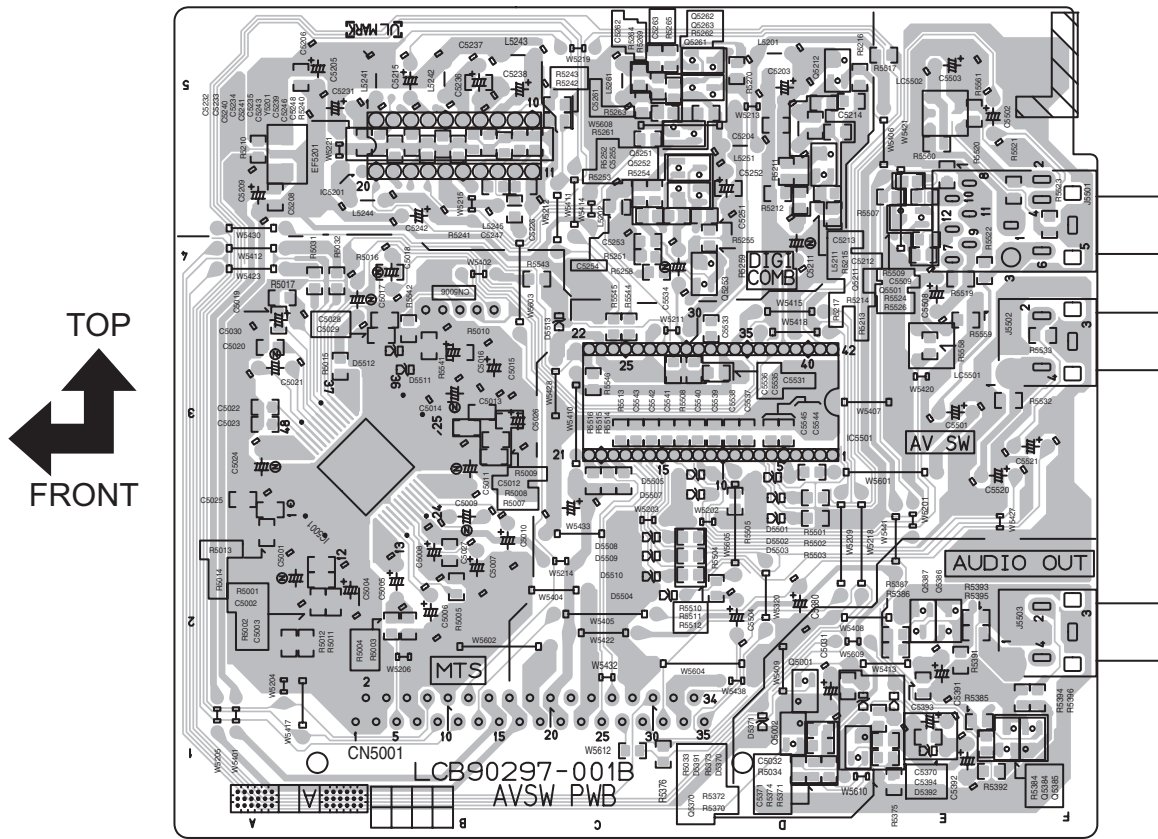


CRT SOCKET PWB PATTERN

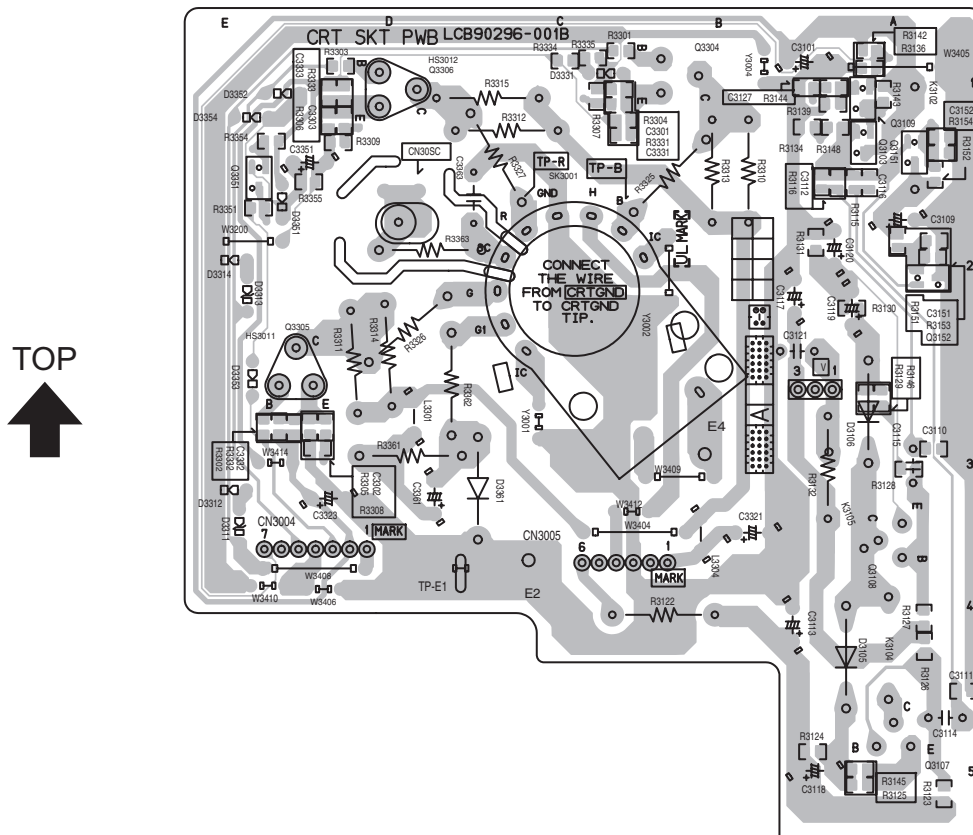

FRONT CONTROL PWB PATTERN




FRONT

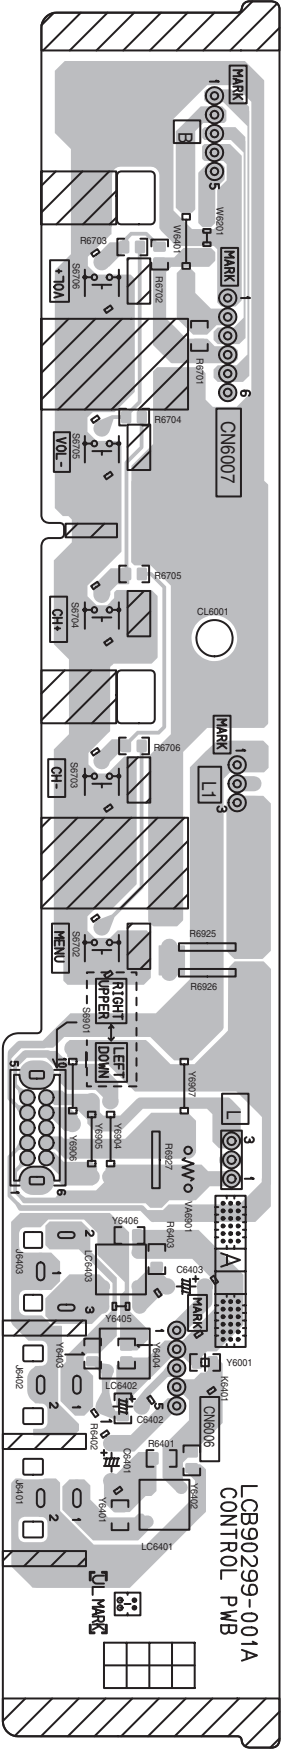

LED & POWER SW PWB PATTERN



FRONT

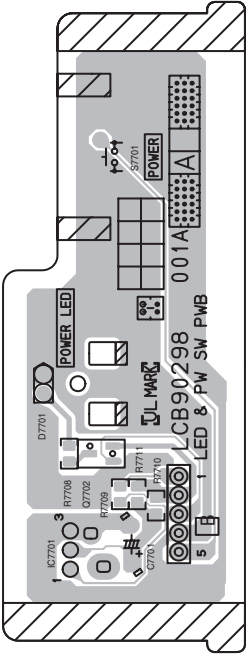

CHANNEL CHART (US)

MODE		BAND	CHANNEL		TUNER BAND
TV	CATV		REAL	DISP.	
○	○	VL	02		I
			03		
			04		
			05		
			06		
		VH	07		II
			08		
			09		
			10		
			11		
			12		
			13		
×	○	MID	A	14	I
			B	15	
			C	16	
			D	17	
			E	18	
			F	19	
			G	20	
			H	21	
			I	22	
		SUPER	J	23	II
			K	24	
			L	25	
			M	26	
			N	27	
			O	28	
			P	29	
			Q	30	
			R	31	
			S	32	
			T	33	
			U	34	
			V	35	
			W	36	
		HYPER	W+1	37	IV
			W+2	38	
			W+3	39	
			W+4	40	
			W+5	41	
			W+6	42	
			W+7	43	
			W+8	44	
			W+9	45	
			W+10	46	
			W+11	47	
			W+12	48	
			W+13	49	
			W+14	50	
			W+15	51	
			W+16	52	
			W+17	53	
			W+18	54	
			W+19	55	
			W+20	56	
			W+21	57	
			W+22	58	
			W+23	59	
			W+24	60	
			W+25	61	
			W+26	62	
			W+27	63	
			W+28	64	
		ULTRA	W+29	65	
			W+30	66	
			W+31	67	
			W+32	68	
			W+33	69	
			W+34	70	

MODE		BAND	CHANNEL		TUNER BAND
TV	CATV		REAL	DISP.	
×	○	ULTRA	W+35	71	IV
			W+36	72	
			W+37	73	
			W+38	74	
			W+39	75	
			W+40	76	
			W+41	77	
			W+42	78	
			W+43	79	
			W+44	80	
			W+45	81	
			W+46	82	
			W+47	83	
			W+48	84	
			W+49	85	
			W+50	86	
			W+51	87	
			W+52	88	
			W+53	89	
			W+54	90	
			W+55	91	
			W+56	92	
			W+57	93	
			W+58	94	
			W+59	100	
			W+60	101	
			W+61	102	
			W+62	103	
			W+63	104	
			W+64	105	
			W+65	106	
			W+66	107	
			W+67	108	
			W+68	109	
			W+69	110	
			W+70	111	
			W+71	112	
			W+72	113	
			W+73	114	
			W+74	115	
			W+75	116	
			W+76	117	
			W+77	118	
			W+78	119	
			W+79	120	
W+80	121				
W+81	122				
W+82	123				
W+83	124				
W+84	125				
		SUB MID	A-8 A-4 A-3 A-2 A-1	01 96 97 98 99	I
○	×	UHF	14 } 69		IV
TOTAL 180CH { VHF 124CH { UHF 56CH					
NOTE: TO RECEIVE THE SUBSCRIPTION OR PREMIUM PROGRAMMING FROM CERTAIN CABLE COMPANIES. SPECIAL ADAPTERS MAY BE REQUIRED.					

CHANNEL CHART (CA)

MODE		BAND	CHANNEL		TUNER BAND
TV	CATV		REAL	DISP.	
○	○	VL	02		I
			03		
			04		
			05		
			06		
		VH	07		
			08		
			09		
			10		
			11		
			12		
			13		
×	○	MID	A	14	II
			B	15	
			C	16	
			D	17	
			E	18	
			F	19	
			G	20	
			H	21	
			I	22	
		SUPER	J	23	
			K	24	
			L	25	
			M	26	
			N	27	
			O	28	
		HYPER	P	29	III
			Q	30	
			R	31	
			S	32	
			T	33	
			U	34	
			V	35	
			W	36	
			W+1	37	
			W+2	38	
			W+3	39	
			W+4	40	
			W+5	41	
			W+6	42	
			W+7	43	
			W+8	44	
			W+9	45	
			W+10	46	
			W+11	47	
			W+12	48	
			W+13	49	
			W+14	50	
			W+15	51	
			W+16	52	
			W+17	53	
			W+18	54	
			W+19	55	
			W+20	56	
			W+21	57	
			W+22	58	
			W+23	59	
			W+24	60	
			W+25	61	
			W+26	62	
			W+27	63	
			W+28	64	
		ULTRA	W+29	65	IV
			W+30	66	
			W+31	67	
			W+32	68	
			W+33	69	
			W+34	70	

MODE		BAND	CHANNEL		TUNER BAND
TV	CATV		REAL	DISP.	
×	○	ULTRA	W+35	71	IV
			W+36	72	
			W+37	73	
			W+38	74	
			W+39	75	
			W+40	76	
			W+41	77	
			W+42	78	
			W+43	79	
			W+44	80	
			W+45	81	
			W+46	82	
			W+47	83	
			W+48	84	
			W+49	85	
			W+50	86	
			W+51	87	
			W+52	88	
			W+53	89	
			W+54	90	
			W+55	91	
			W+56	92	
			W+57	93	
			W+58	94	
			W+59	100	
			W+60	101	
			W+61	102	
			W+62	103	
			W+63	104	
			W+64	105	
			W+65	106	
			W+66	107	
			W+67	108	
			W+68	109	
		W+69	110		
		W+70	111		
		W+71	112		
		W+72	113		
		W+73	114		
		W+74	115		
		W+75	116		
		W+76	117		
		W+77	118		
		W+78	119		
		W+79	120		
		W+80	121		
W+81	122				
W+82	123				
W+83	124				
W+84	125				
		SUB MID	A-8	01	I
			A-4	96	
			A-3	97	II
			A-2	98	
			A-1	99	
○	×	UHF	14 └ 69		IV
TOTAL 180CH ┌ VHF 124CH └ UHF 56CH					
NOTE: TO RECEIVE THE SUBSCRIPTION OR PREMIUM PROGRAMMING FROM CERTAIN CABLE COMPANIES. SPECIAL ADAPTERS MAY BE REQUIRED.					

Other ManualsLib Projects

 www.manualslib.com

 www.manualslib.de

 www.manualslib.es

 www.manualslib.fr

 www.manualslib.nl

 www.manualslib.mx

 www.manualslib.tech 30+ Languages